



**LIGHT<sup>MY</sup>  
BRICKS**



**LEGO<sup>®</sup> FERRIS WHEEL 2.0 #10247**

**LIGHT KIT**

**INSTALLATION GUIDE**

# Light My Bricks



## LEGO® FERRIS WHEEL 2.0 10247 INSTALLATION GUIDE

Hi There!

We're here to help you get started on the LEGO®

Ferris Wheel 2.0 10247 Light Kit.

This PDF details the instructions for the LED light kit only. If you are wishing to purchase this product, please [click here](#) to view the product page.

If you run into any issues, please refer to the troubleshooting section towards the end of this guide.

Have fun and enjoy!





## PACKAGE CONTENTS:



- 12 x RGB Audio Strip Light 15cm
- 1 x White 30cm Bit Light
- 13 x White 15cm Bit Light \*
- 2 x Flashing White 30cm Bit Light
- 3 x White 30cm Large Bit Light



- 1 x 8-Port Expansion Board
- 3 x 2-Port Expansion Board
- 2 x 3 Pin 8-Port Expansion Board



- 1 x 15 Connecting Cable
- 2 x 30cm Connecting Cable
- 15 x 3-Pin 15cm Connecting Cable \*
- 1 x Rotating Connecting Cable



- 1x USB Power Cable  
(Power Source not Included)

+ 10 x Adhesive Square

## ASSORTED BRICKS:

- 12 x Minifigure Neck Bracket W/Back Stud - White
- 25 x Technic Bush 1/2 Smooth - Light Grey
- 12 x 1x1 Round Plate - Trans Clear
- 12 x 1x8 Tile - White
- 12 x 1x2 Tile - White
- 4 x 1x1 Round Plate W/Open Stud - Black
- 4 x 1x1 Plate Mod Rounded W/ Handle - Black
- 2 x 1x1 Tile W/ Clip Round Edges - Black
- 1 x Arm Skeleton, Bent with Clips (Horizontal Grip) - Black
- 2 x Tile 1x2 - Black
- 4 x Technic 1/2 Pin
- 1 x Plate 1x2 MW Stud Jumper - Black
- 1 x 1x1 Round Plate - Trans Red
- 1 x 1x1 Round Plate - Trans Green

## RGB AUDIO CONTROL KIT:



- 1 x RGB Audio Control Board
- 1 x IR Receiver
- 1 x Speaker
- 1 x 3-Pin 5cm Connecting Cable
- 1 x RGB Audio Remote Control
- 1 x Micro USB Cable

\* Indicates components which include spares

## Contents

|                  |    |
|------------------|----|
| Before You Begin | 5  |
| Blueprint        | 10 |
| Instructions     | 11 |
| Final Product    | 45 |
| Troubleshooting  | 46 |
| Contact          | 50 |



## Before You Begin

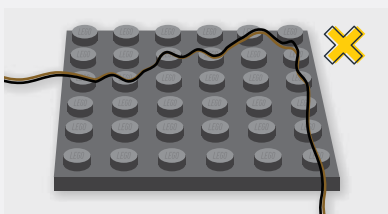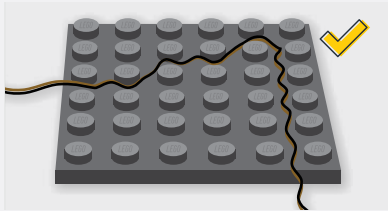

### Laying cables in between and underneath bricks

Cables can fit in between and underneath LEGO® bricks, plates, and tiles providing they are laid correctly between the LEGO® studs. Do NOT forcefully join LEGO® together around cables; instead ensure they are laying comfortably in between each stud.

*CAUTION: Forcing LEGO® to connect over a cable can result in damaging the cable and light.*

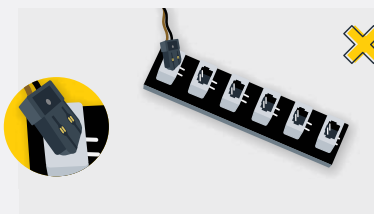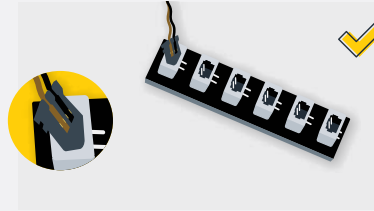


### Connecting Cable Connectors To Expansion Boards

Take extra care when inserting connectors to ports of Expansion Boards. Connectors can be inserted only one way. With the expansion board facing up, look for the soldered “=” symbol on the left side of the port. The connector side with the wires exposed should be facing toward the soldered “=” symbol as you insert into the port. If a plug won’t fit easily into a port connector, do not force it.

*Incorrectly inserting the connector can result in bent pins inside the port or possible overheating of the expansion board when connected.*

## Before You Begin

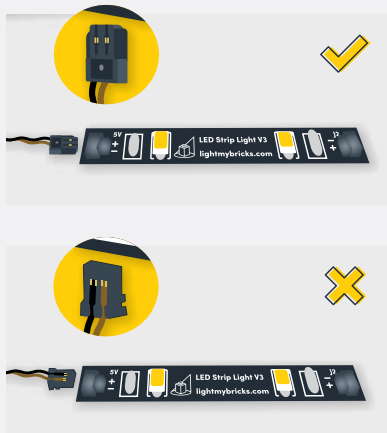

### Connecting Cable Connectors To Strip Lights

Take extra care when inserting connectors to ports on the Strip Lights. Connectors can be inserted only one way. With the Strip Light facing up, ensure the side of the connector with the wires exposed is facing down. If a plug won't fit easily into a port connector, don't force it. Doing so will damage the plug and the connector.




### Connecting Micro Cable Connectors To Micro Expansion Board Ports

Take extra care when inserting the micro connectors to micro ports of Micro Expansion Boards. Connecting Micro Bit Lights to Micro Expansion Boards is similar to connecting lights and cables to Strip Lights. With the expansion board facing up, ensure the side of the connector with the wires exposed is facing down. If a plug won't fit easily into a port connector, do not force it. Use your fingernail to push the plastic part of the connector to the micro port.

## Before You Begin

### Installing Bit Lights Under Lego® Bricks And Plates

When installing Bit Lights under LEGO® pieces, ensure they are placed the correct way up (Yellow LED component exposed). You can either place them directly on top of LEGO® studs or in between.

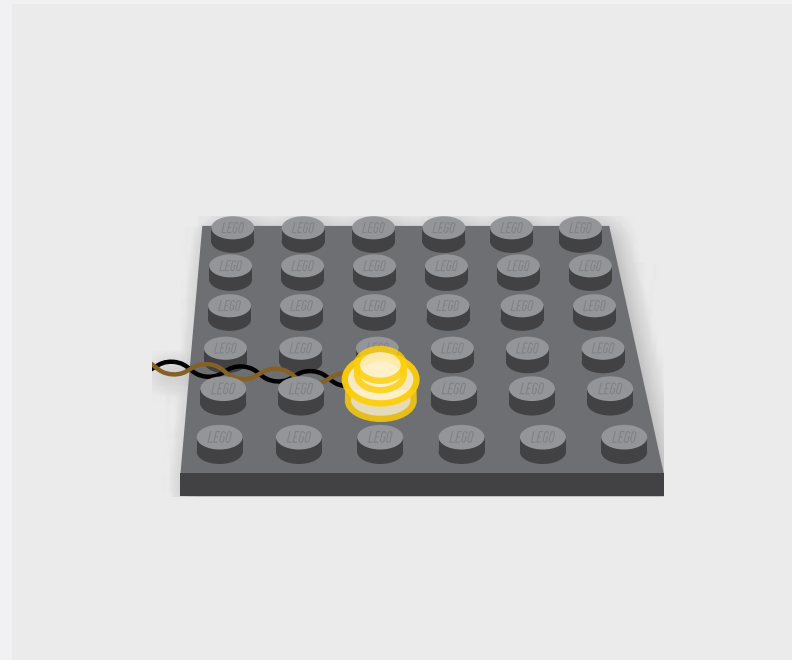

# Before You Begin

## The Symbols Used In This Guide

When going through the following guide you will come across symbols and formats that will assist with the installation of your light kit. Take notice of them as each has a specific purpose.

### Light Kit Component

This is the most important image format as it indicates which part to use from the Light Kit. Make sure you pay close attention to which part is shown.

White 30cm Bit Light



### Connect

Used when you need to connect a LEGO piece or LMB component.



### Disconnect

Used when you need to remove a LEGO piece/ section or LMB component.



### Directional

Used to show where to route cables, place components, or move them.



### Bend/Pivot

Used when a component needs to be bent, or part folded or pivoted.



### Turn/ Flip

Will be found in the top left corner when the set needs to be rotated or flipped.



### Twist/ Braid

Seen when a set of cables need to be grouped and twisted together.



### Power On Test

Found at the end of a major step to test the lights. Will be located in the top left corner.



### Note

Notes will be found alongside the instruction photos and explain what to do.





# Before You Begin

## Repeat Step

Repeat the previous step eg. Make a spotlight, then make a second spotlight.

x2

## Connect Focus

Used to highlight a hard to see area where a component is being connected.



## Disconnect Focus

Used to highlight a hard to see area where a component is being disconnected.



## General Focus

Used to highlight a hard to see area where a component needs to be acted on.



## General Note


This is a sample note that is used anywhere in this guide. It will explain a difficult section where photos are hard to illustrate or easily confused.

## Connect Note


The green coloured note is used when the topic focuses on a component being connected, like the shown Power Bank.


## Disconnect Note

The red coloured note is used when the topic focuses on a component being disconnected or like here, the removed pieces.


**NOTE**


Take the 5cm Connecting Cable from the 4-Port Micro Expansion Board and route it into the "IN" port of the Flicker Effects Board

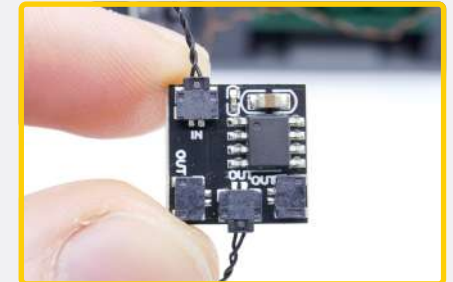


**NOTE**

Connect to a 5V USB Power Bank, 5V USB Wall Adaptor, or USB to AA Battery Pack (sold separately)




**NOTE**

You should have these parts left over that were removed from the LEGO set






# BLUEPRINT

Wheel

Ground Level

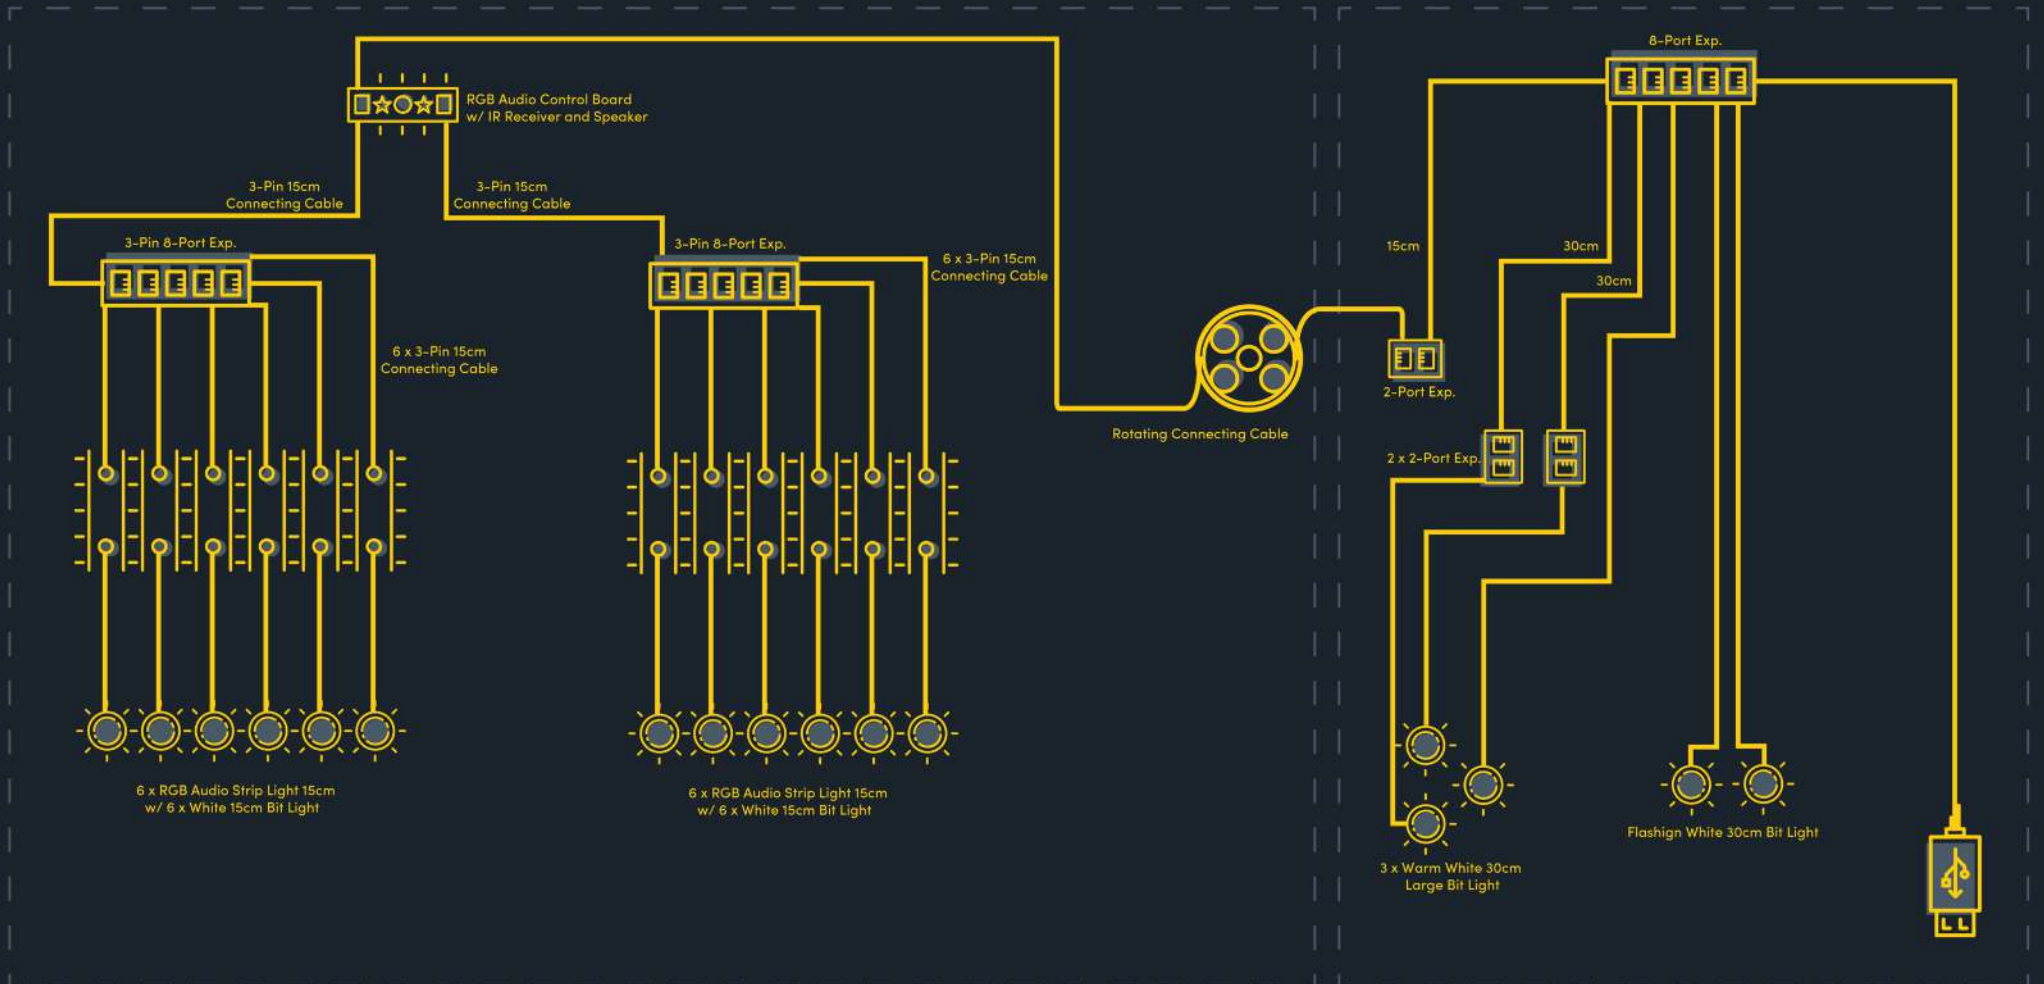



## INSTRUCTIONS

To ensure a smooth installation of your light kit, please read and follow each step carefully. If you run into any issues, please refer to the online troubleshooting guide.

**1**


**NOTE**

Ensure to leave the two White Tiles attached.



**2**


**NOTE**

Ensure to leave the two White Tiles attached.







**12 x Tile 1x2 - White**

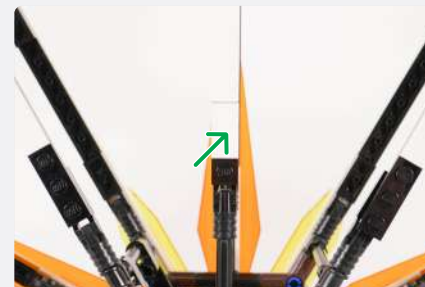

**NOTE**

Connect the remaining White Tiles 1x2 to the other 11 beams on the wheel.

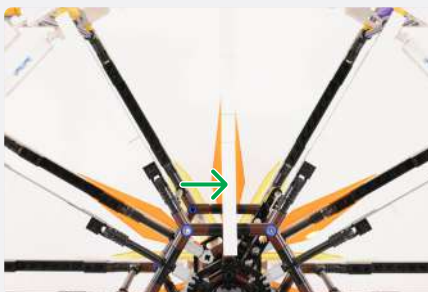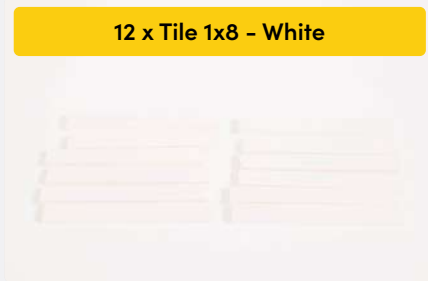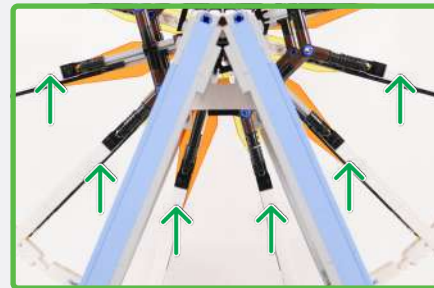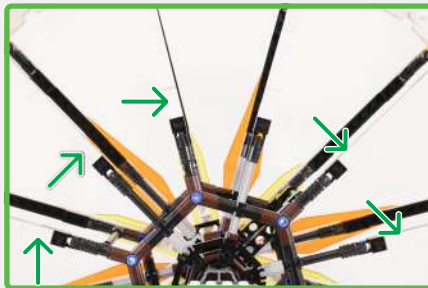

**NOTE**

Connect the remaining White Tiles 1x8 to the other 11 beams on the wheel.





3

RGB Audio Strip Light 15cm




3-Pin 15cm Connecting Cable

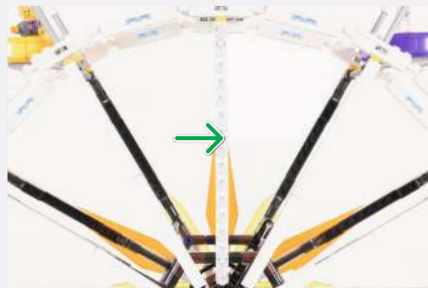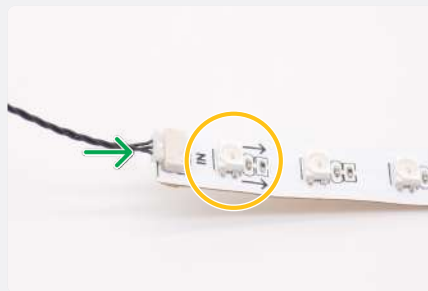





**NOTE**

Ensure the side with the 3-Pin 15cm Connecting Cable is next to the middle of the Ferris Wheel.

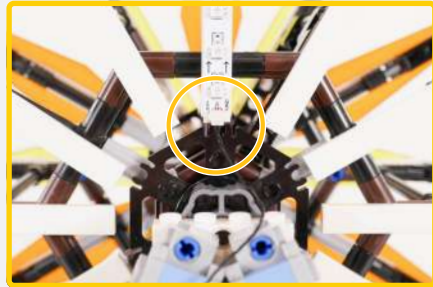

4

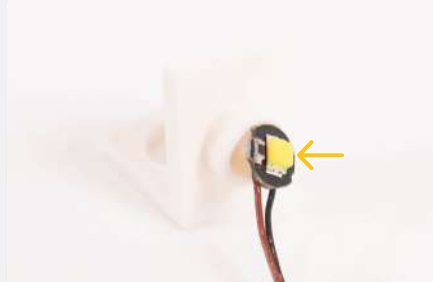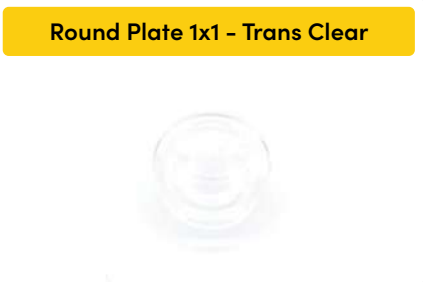


**Technic Bush 1/2 Smooth - Light Grey**



**Technic Bush 1/2 Smooth - Light Grey**



**5**

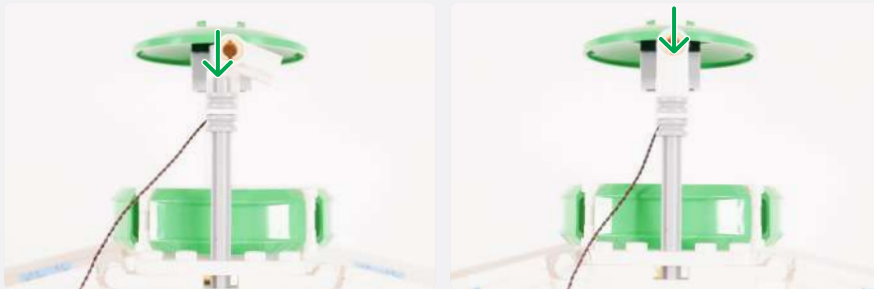

**NOTE**

Keep wrapping the cable until there is the same amount of slack as shown.



**NOTE**




REPEAT Steps 3-5 for all the other 11 beams on the Ferris Wheel.



**6**





**NOTE**

Position the Ferris Wheel as shown so that the Purple Carriages are directly North, South, East and West.

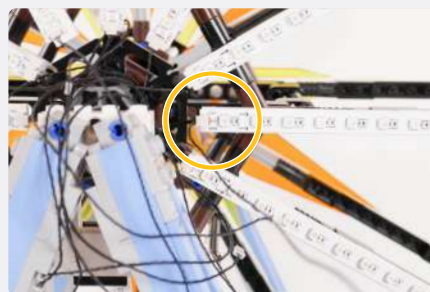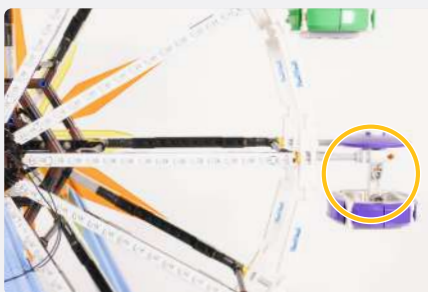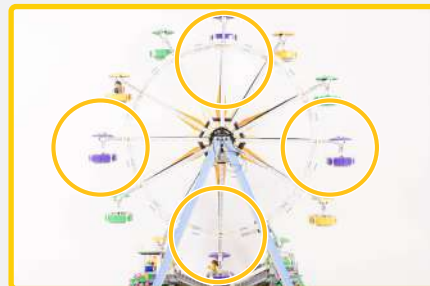

**NOTE**

Thread the 3-Pin 15cm Connecting Cables through the indicated gaps.

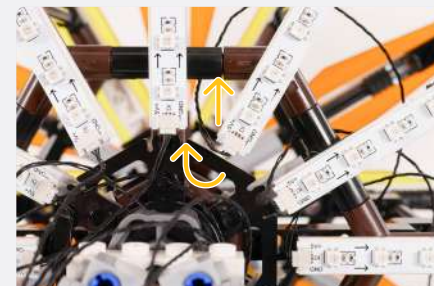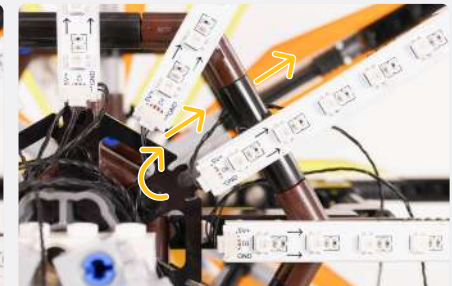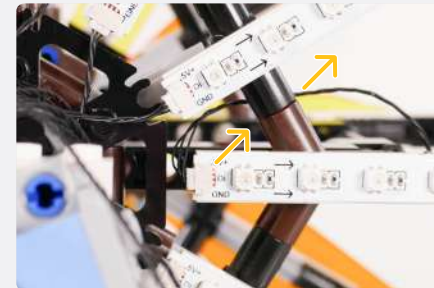


**NOTE**









Pull all 3-Pin 15cm Connecting Cables towards the indicated position.



7

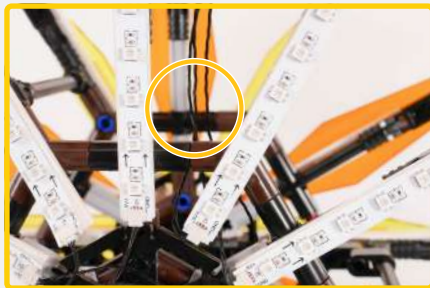





3-Pin 8-Port Expansion Board

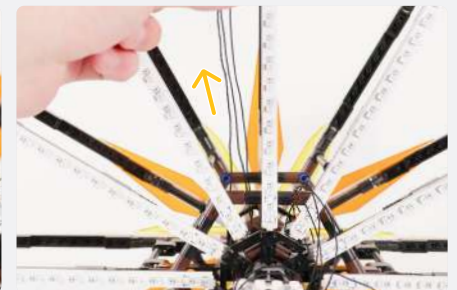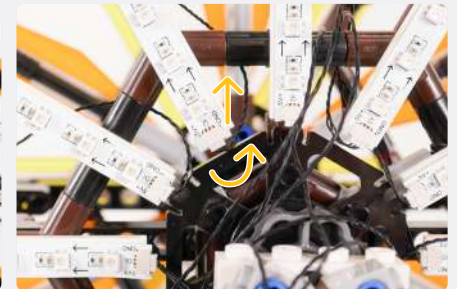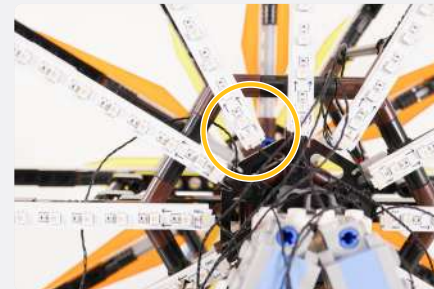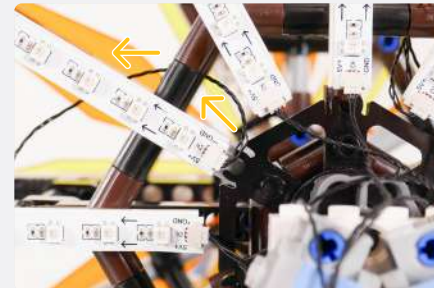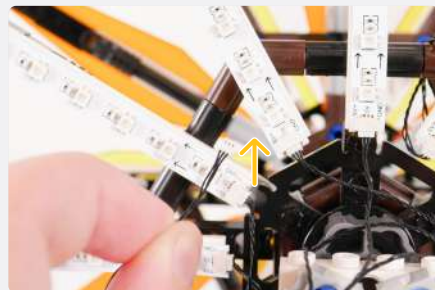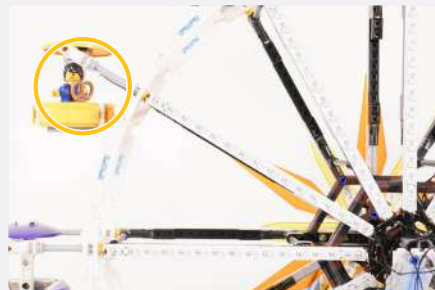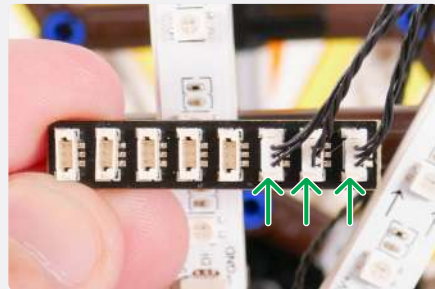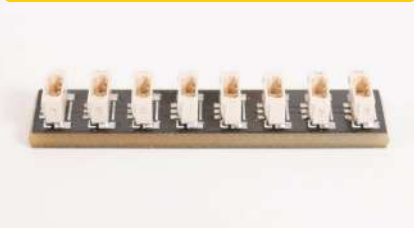



**NOTE**

Ensure you connect the cables to the 3-Pin 8-Port Expansion Board without tangling them through the beams.

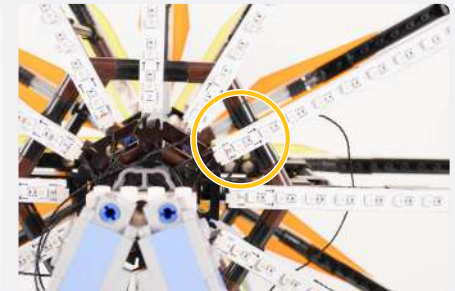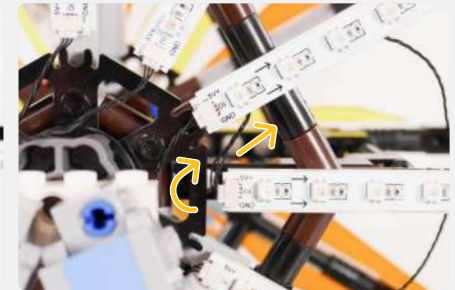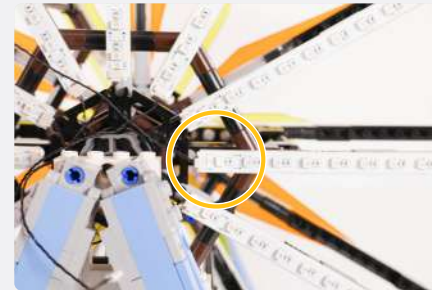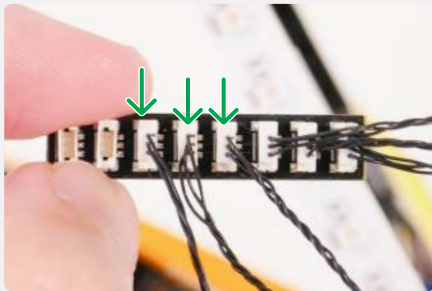


## 8






**NOTE**

Turn the Wheel 180 degrees while still ensuring the Purple carriages are at North, South, East and West.



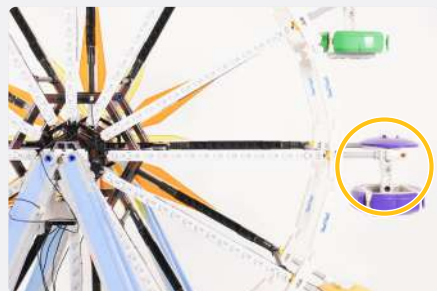


**NOTE**


Pull all 3-Pin 15cm Connecting Cables towards the indicated position.

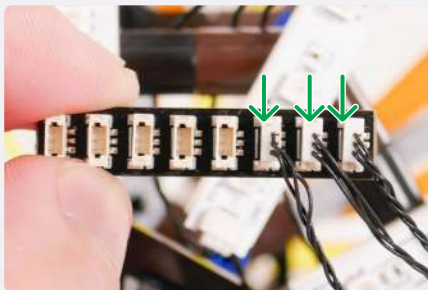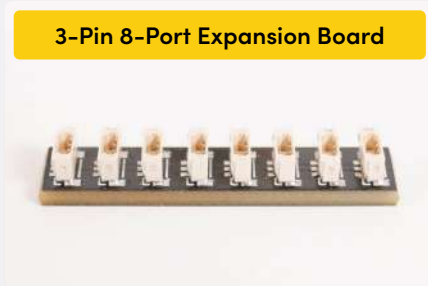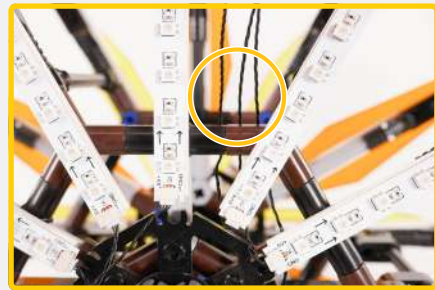








**9**


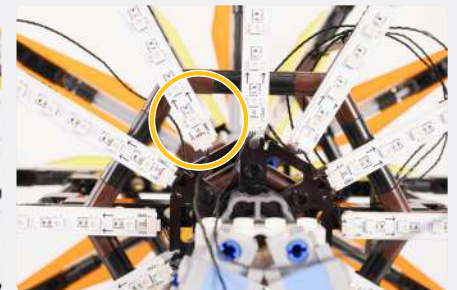
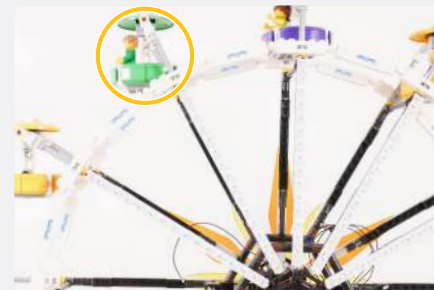
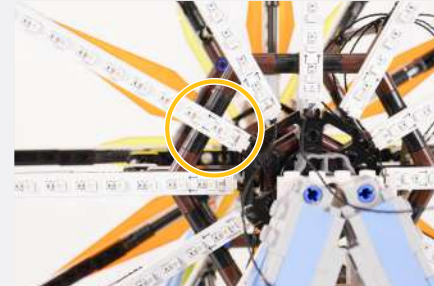


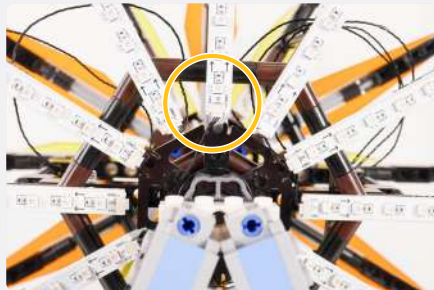


**NOTE**







Ensure you pull the 3-Pin 8-Port Expansion Board from the inside to outside of the Wheel from the same section/ gap.

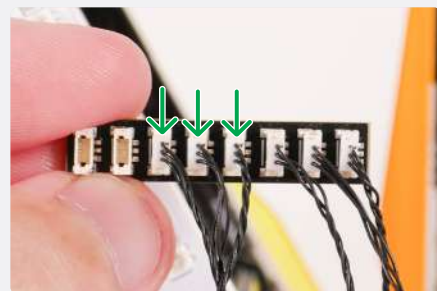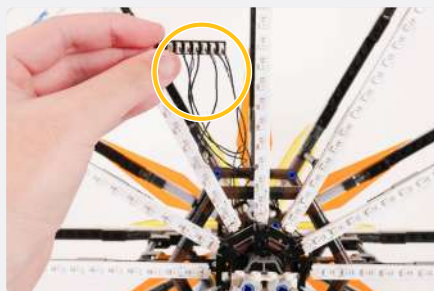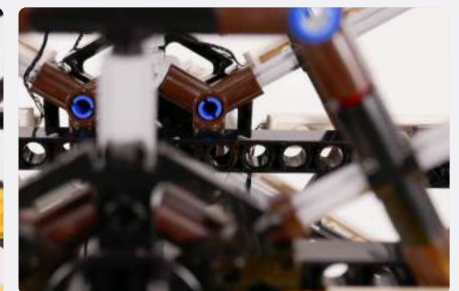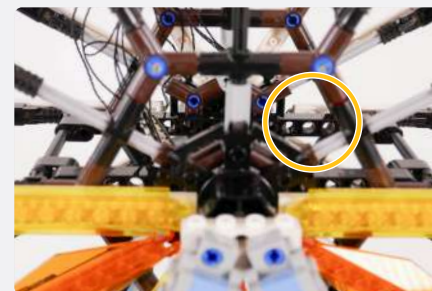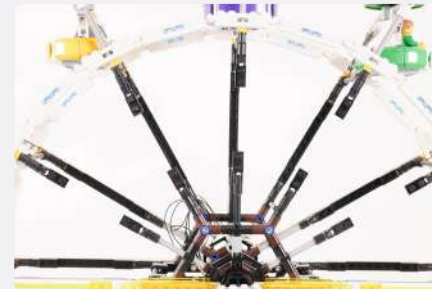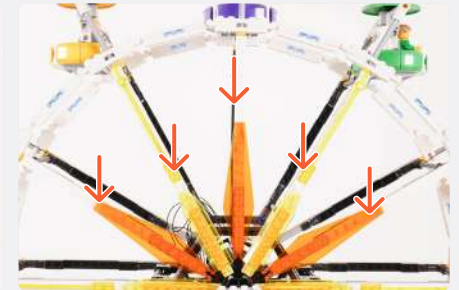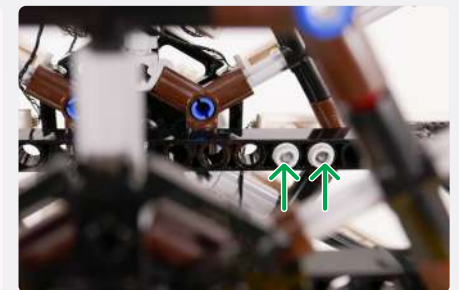
**10**

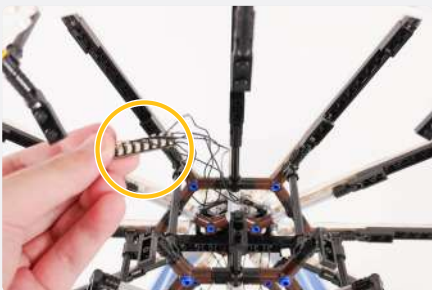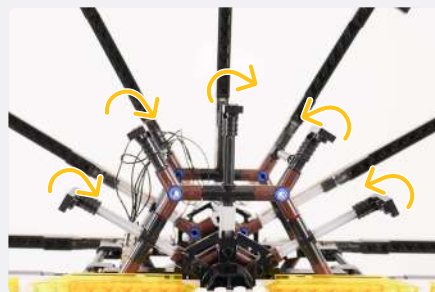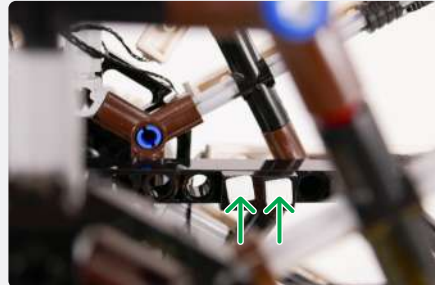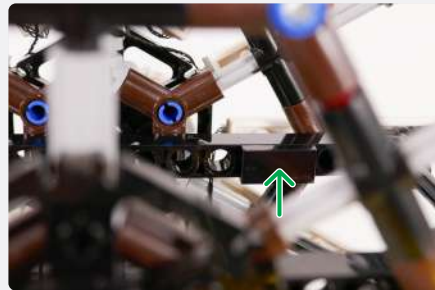**2 x Technic Pin 1/2 - Light Grey**




**NOTE**

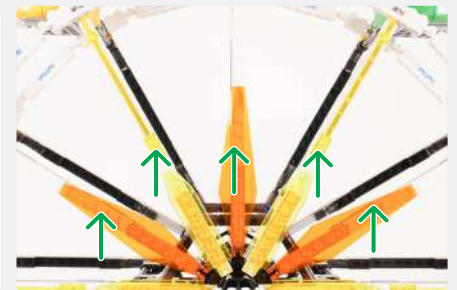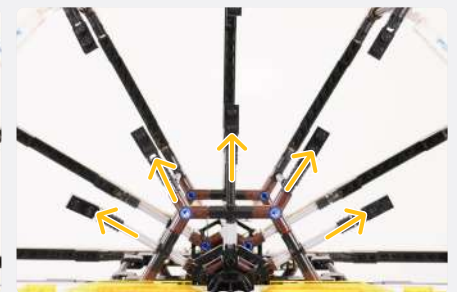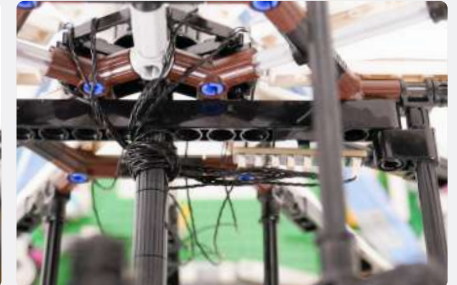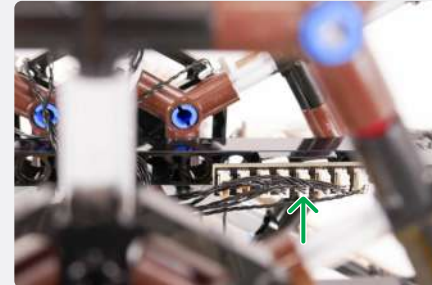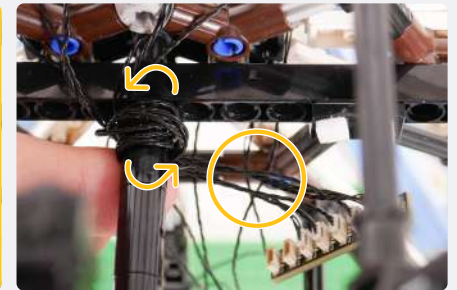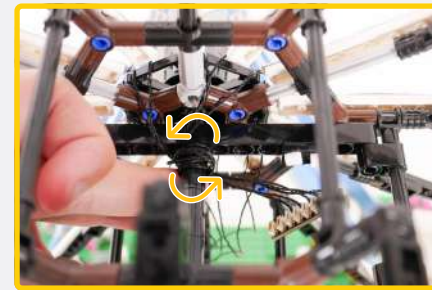Wrap the 3-Pin 8-Port Expansion Board around the following beam until it can be attached to Adhesive Squares with no slack.








11



**NOTE**


Rotate the wheel 180 degrees.

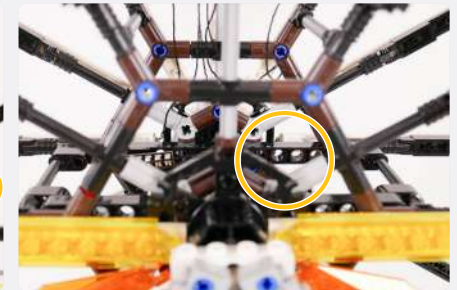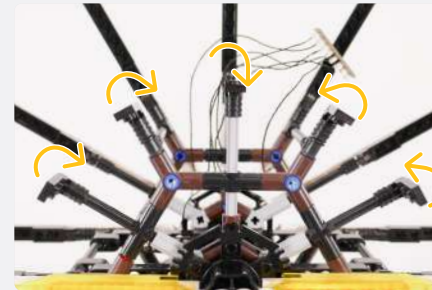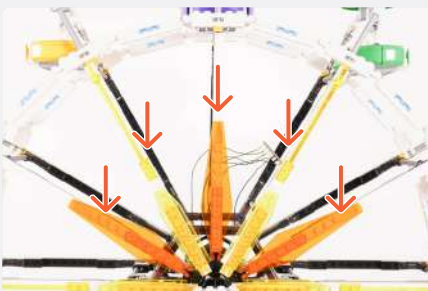


2 x Technic Pin 1/2 - Light Grey





Tile 1x2 - Black


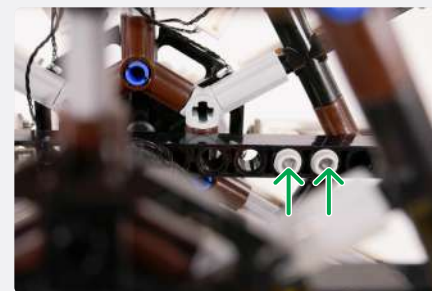


2x Adhesive Square

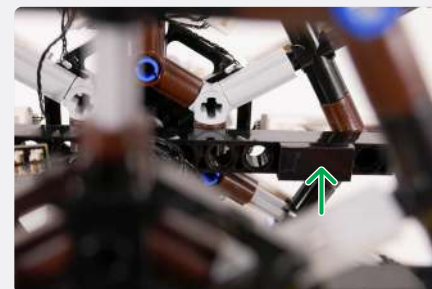

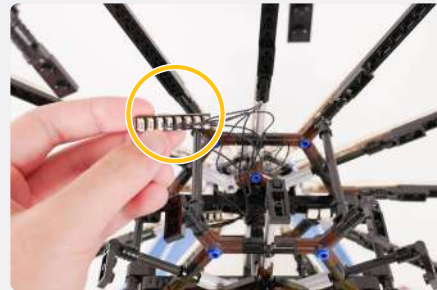
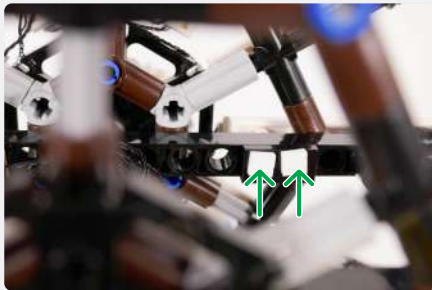


**NOTE**  
 Wrap the 3-Pin 8-Port Expansion Board around the following beam until it can be attached to Adhesive Squares with no slack.

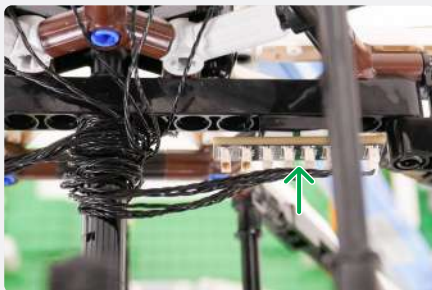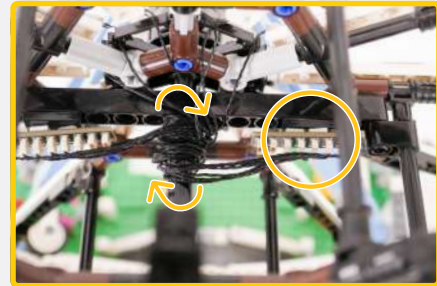


**12**

3-Pin 15cm Connecting Cable

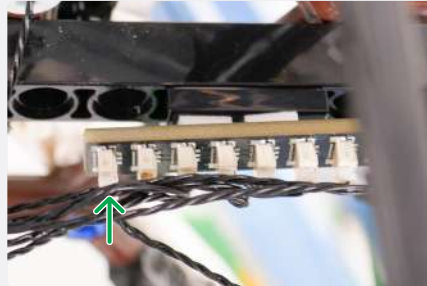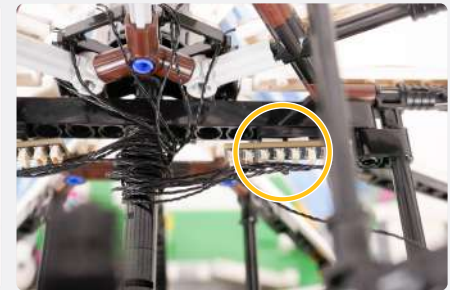


3-Pin 15cm Connecting Cable


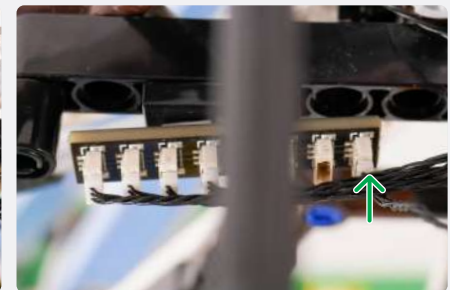





13

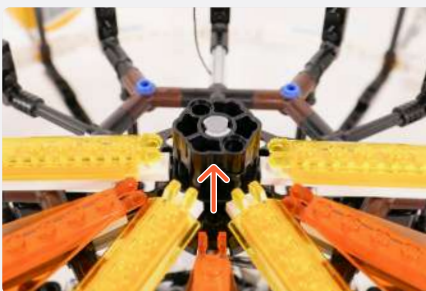


**NOTE**  
Your barrel piece may be Grey or Black. Regardless, the process is the same.

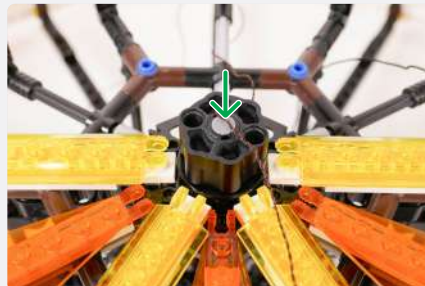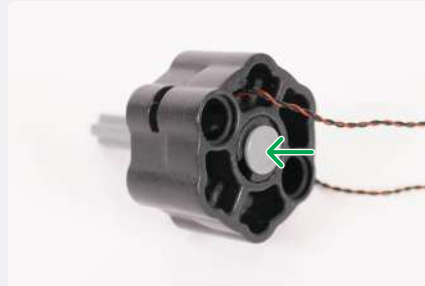



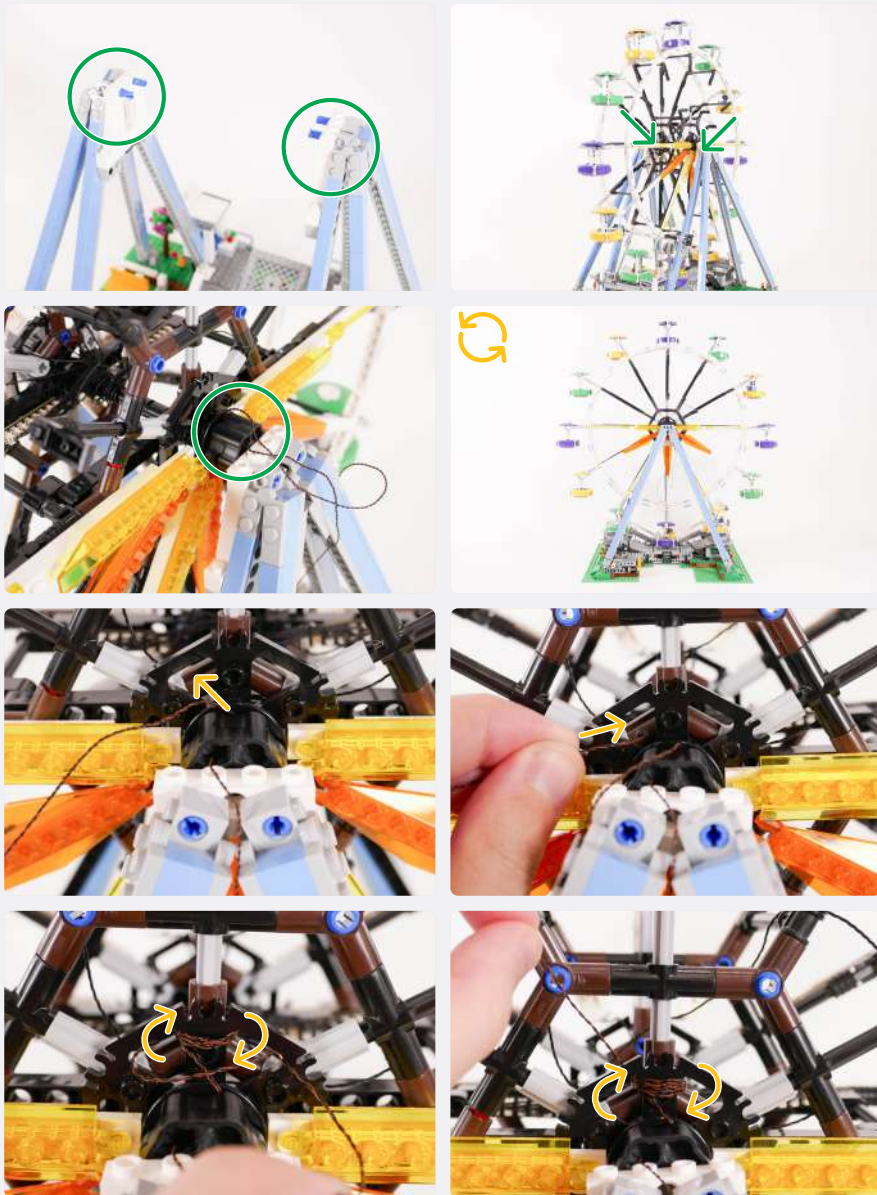

**14**

 **NOTE**

Keep wrapping the cable until there is the same amount of slack shown.




**IR Receiver**




**3-Pin 5cm Connecting Cable**




**RGB Audio Control Board**

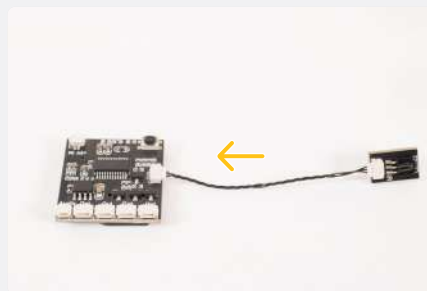

 **NOTE**



Connect the other end of the 3-Pin 5cm Connecting Cable to the 'IR' port of the Control Board.

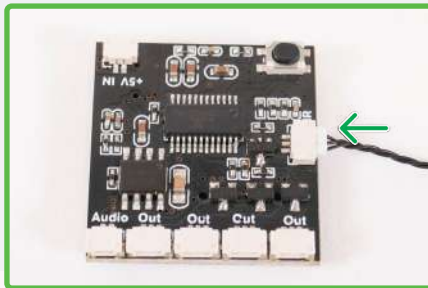

Speaker






4x Adhesive Square

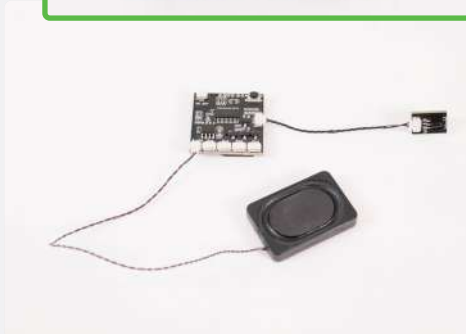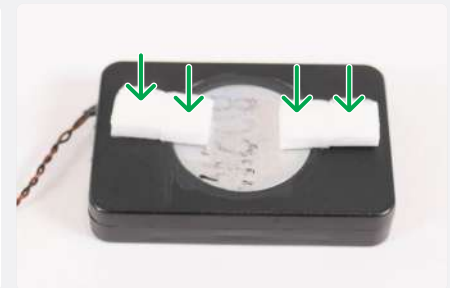


NOTE

Connect the Speaker to the 'Audio' port of the Control Board.

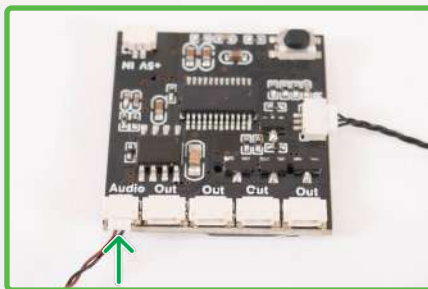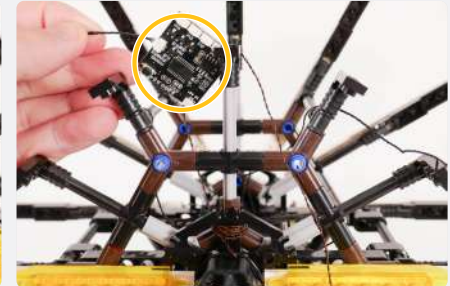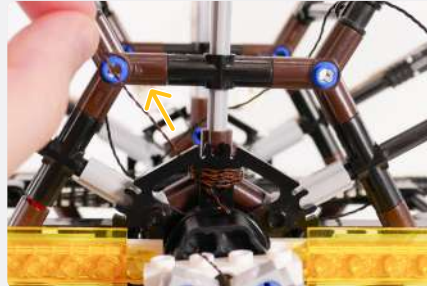


NOTE

Connect the Rotating Connecting Cable to the 'IN' port of the Control Board.

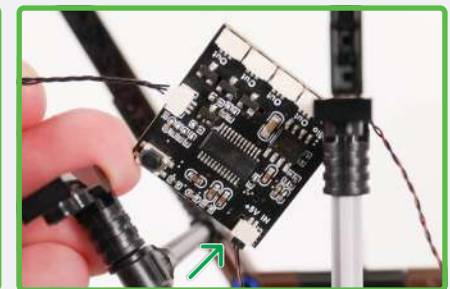


2x Adhesive Square

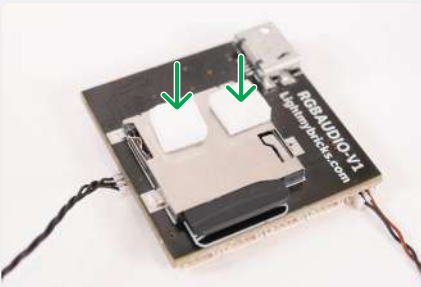





15

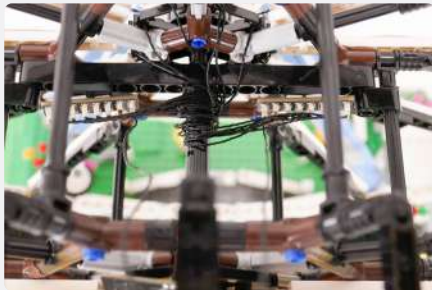



NOTE

Wrap both loose 3-Pin 15cm Connecting Cables from the Expansion Boards around the following beam

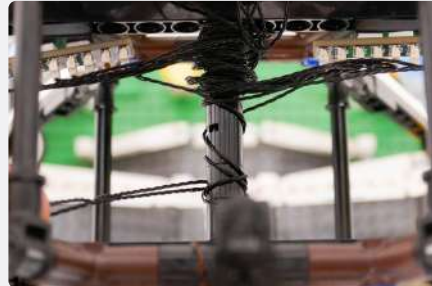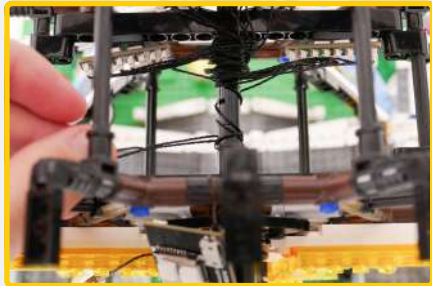



NOTE

Connect both 3-Pin 15cm Connecting Cables to the 'OUT' port of Control Board.

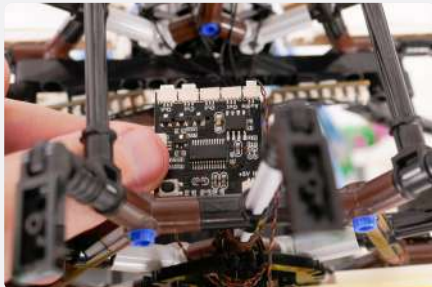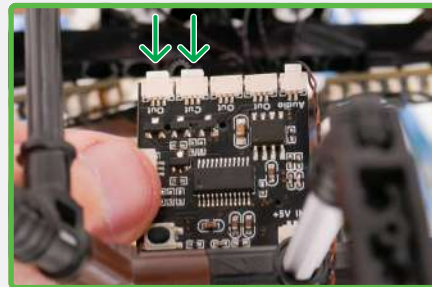


NOTE

Hold all the wrapped cables forward before connecting the Board down on the beam.

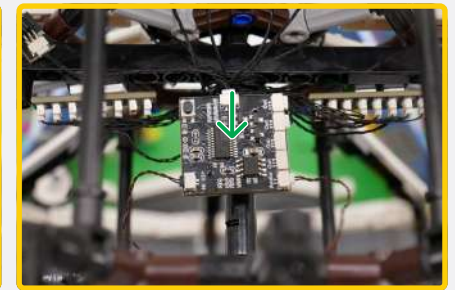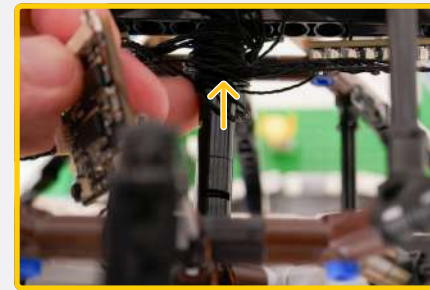


NOTE

Remove the adhesive backing from the IR Receiver.

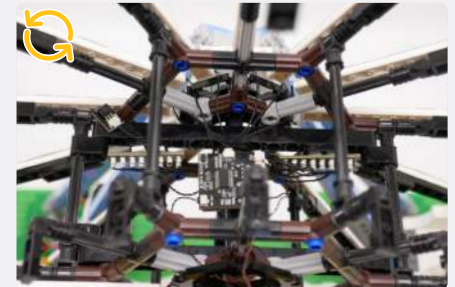

**16**

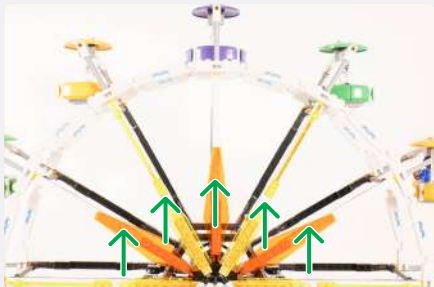





**NOTE**

Rotate the wheel 180 degrees.





**NOTE**




Hold all the wrapped cables forward before connecting the Board down on the beam.

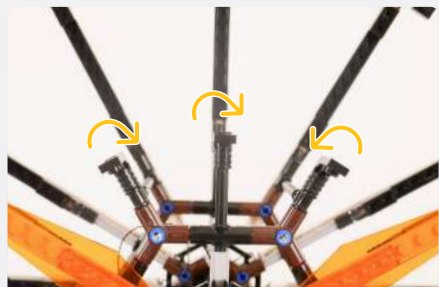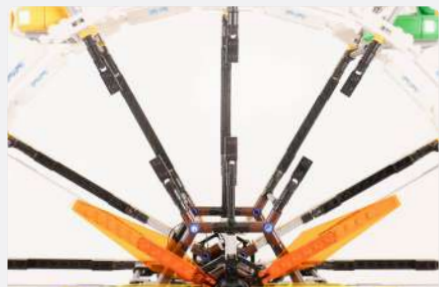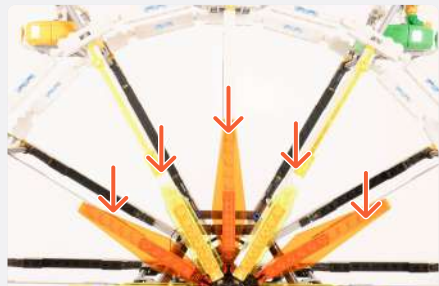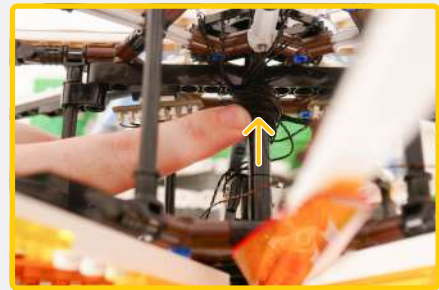



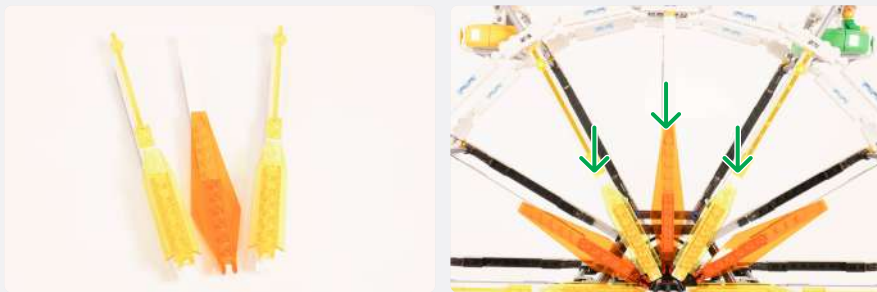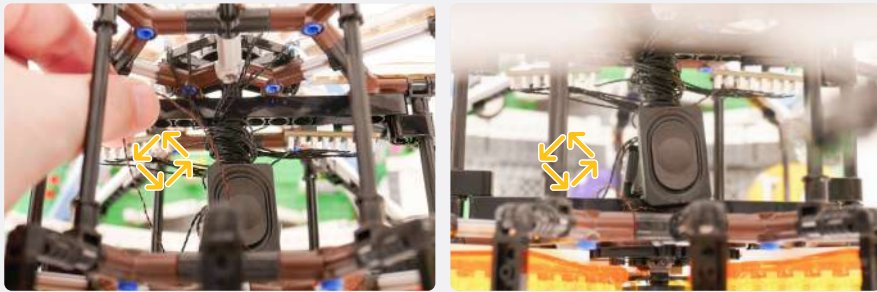


**17**

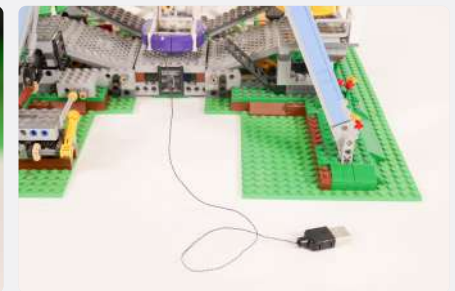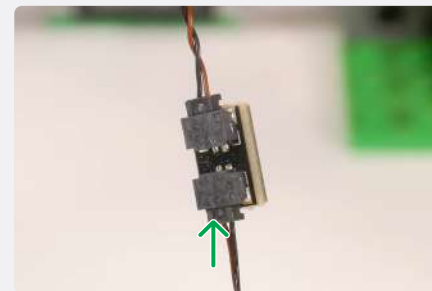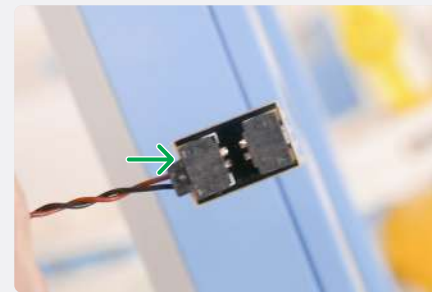


**NOTE**

Connect to a 5V USB Power Bank, 5V USB Wall Adaptor, or USB to AA Battery Pack (sold separately)

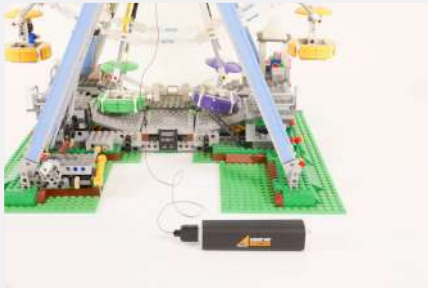
**NOTE**



Press the 'ON' Button to test the lights, if they don't automatically turn on.  
To change the lighting effects, press 'Mode'.



**!** If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section. **i**




**NOTE**

Disconnect the USB Power Cable.

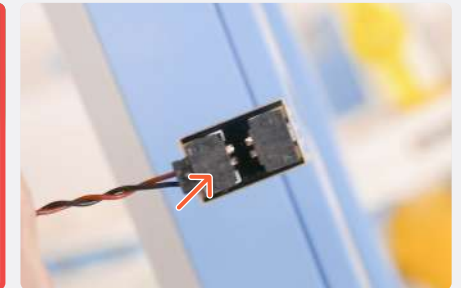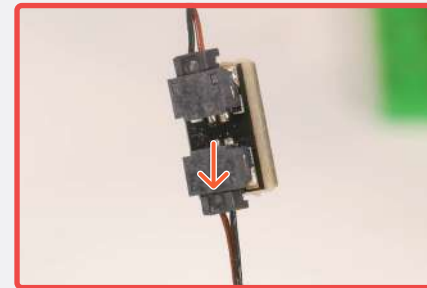








18

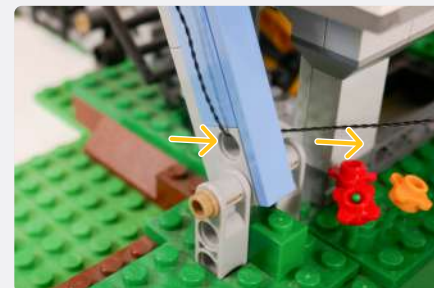
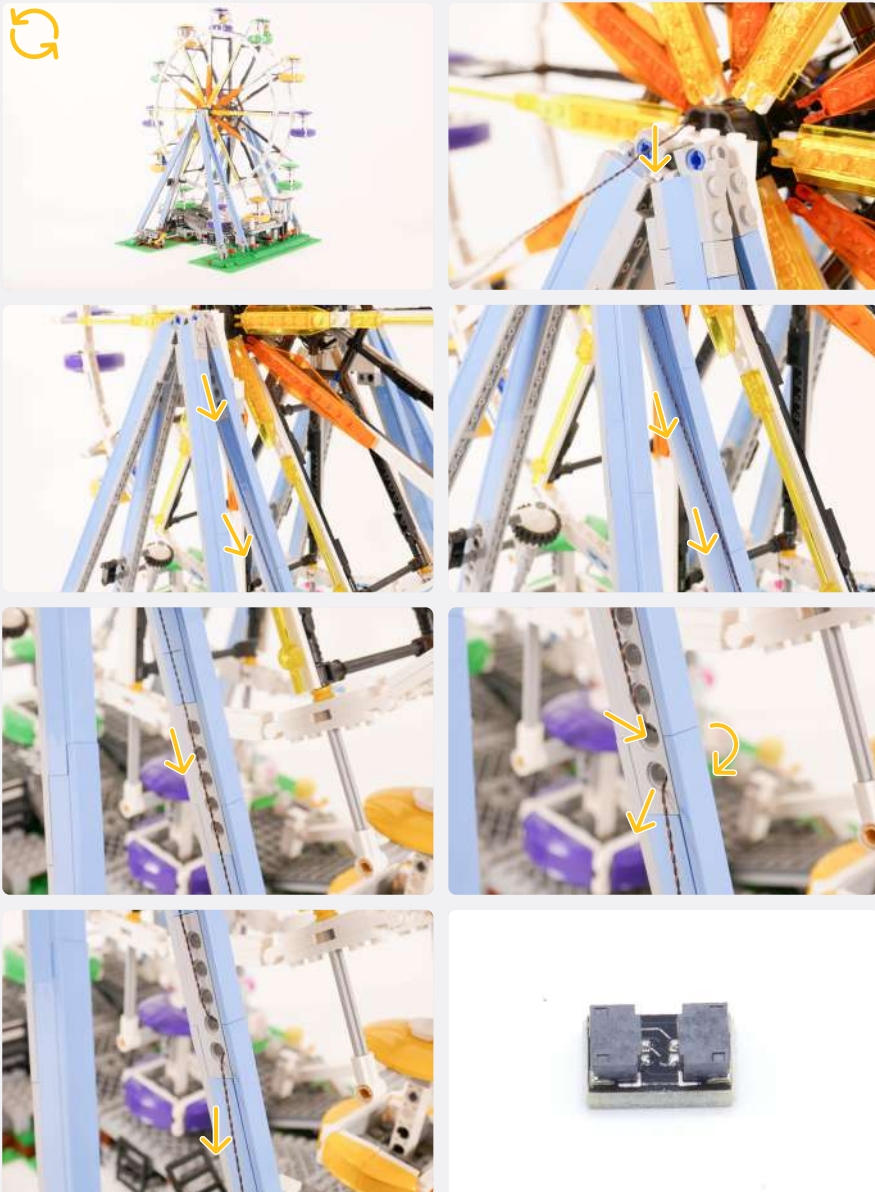


19

8-Port Expansion Board



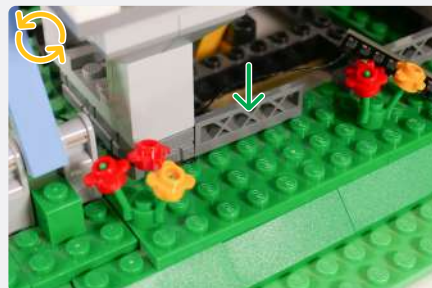
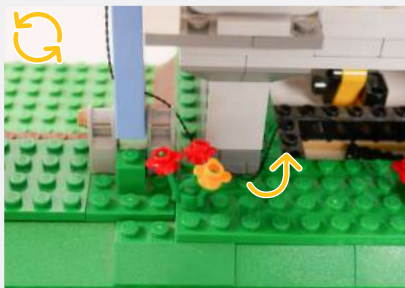
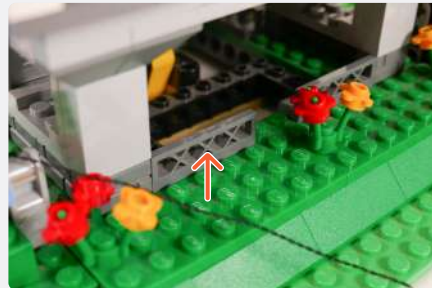
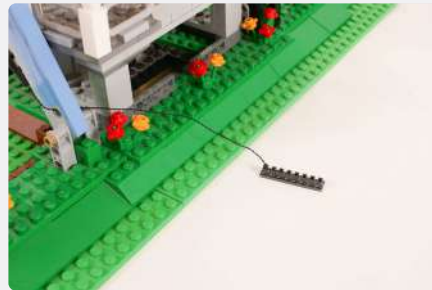
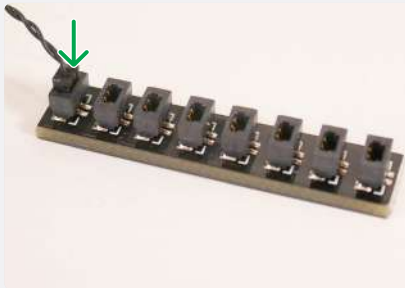


20








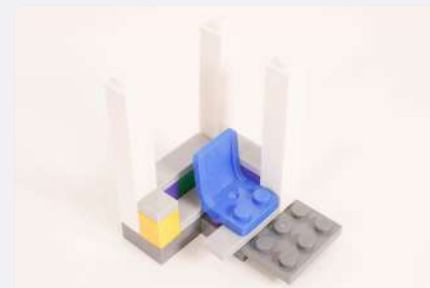
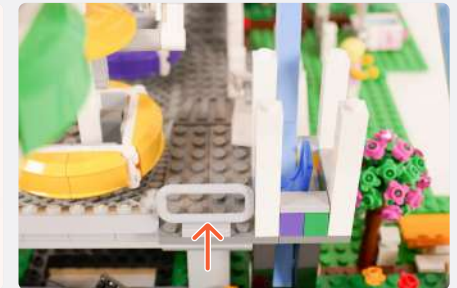














21

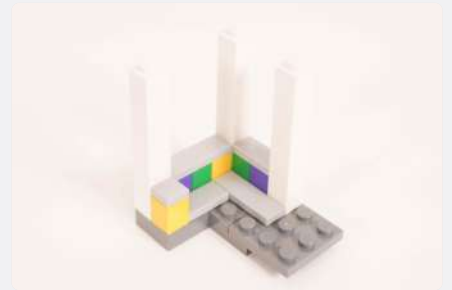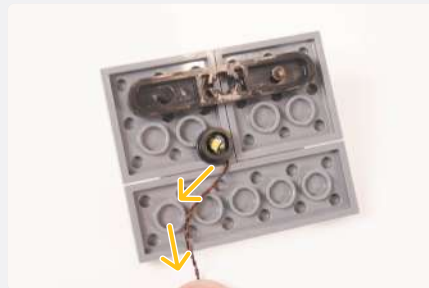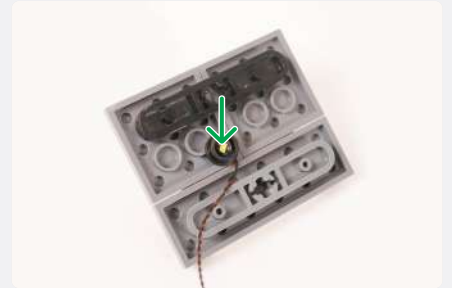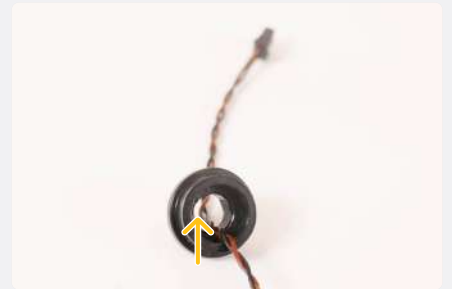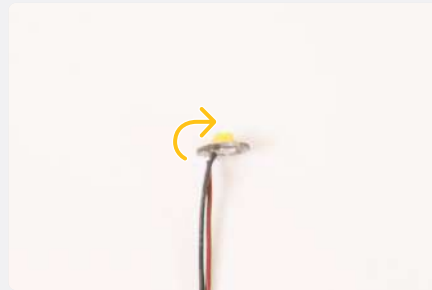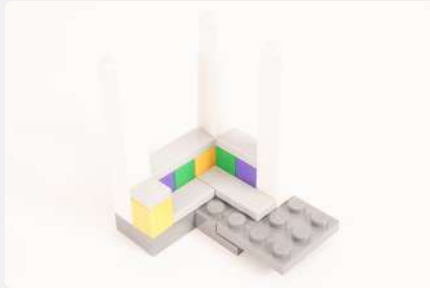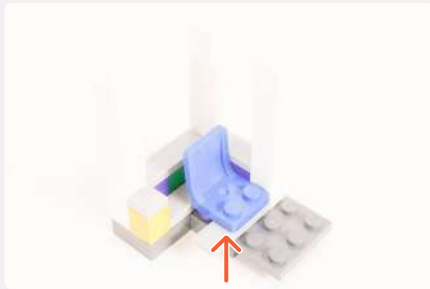

22

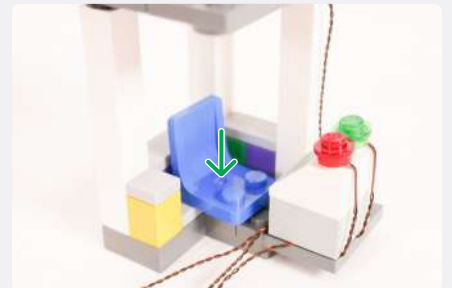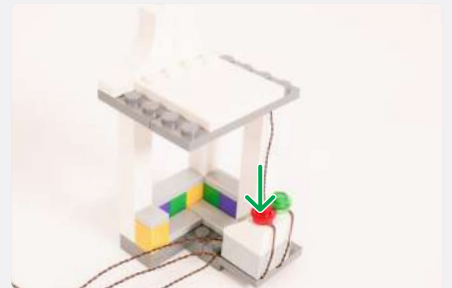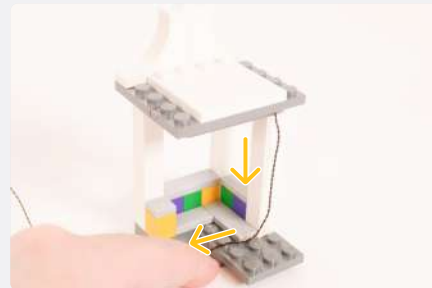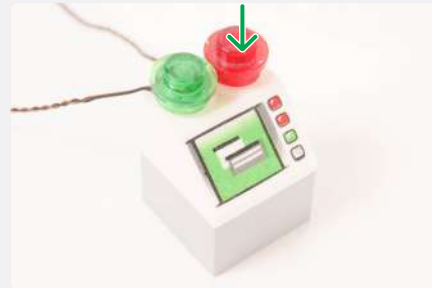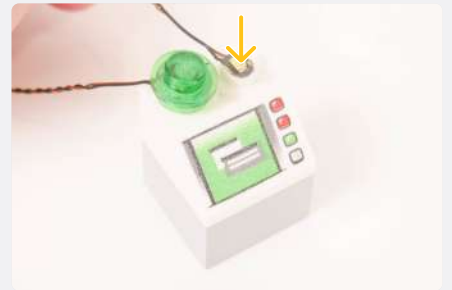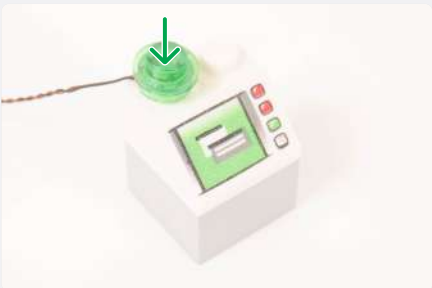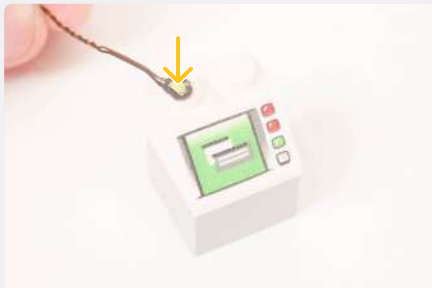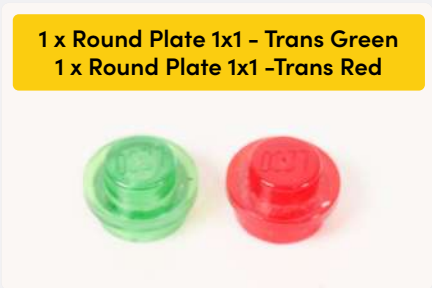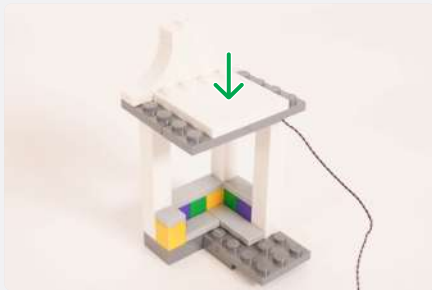


23

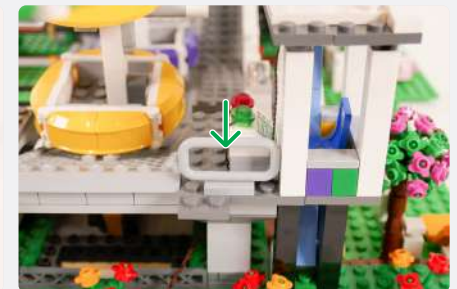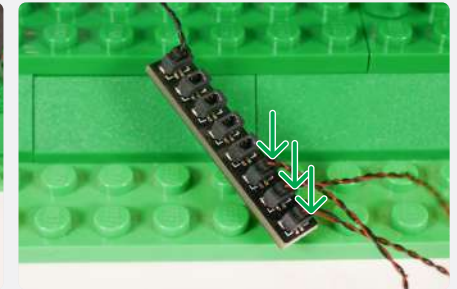
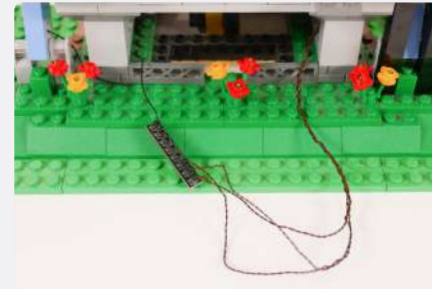
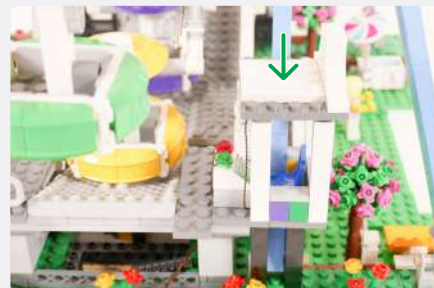
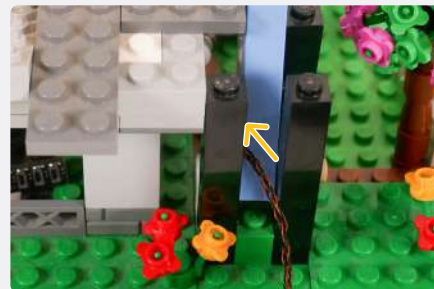
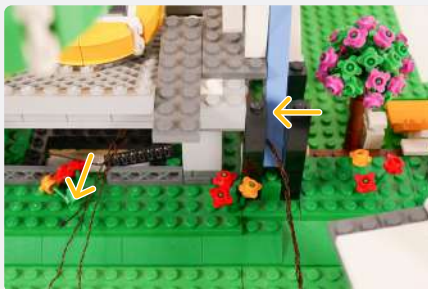
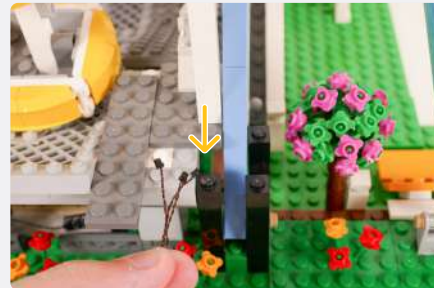
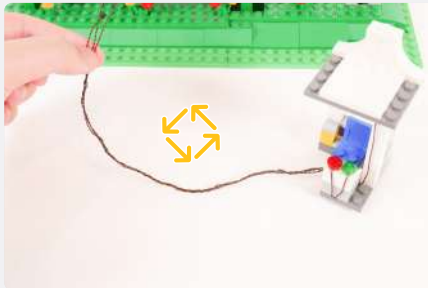
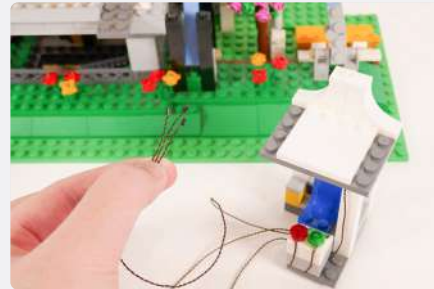
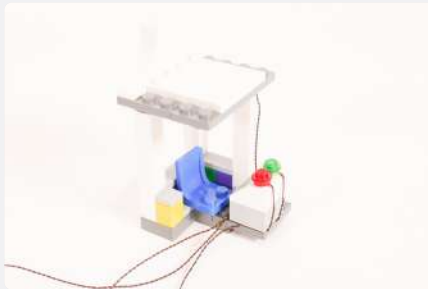




24

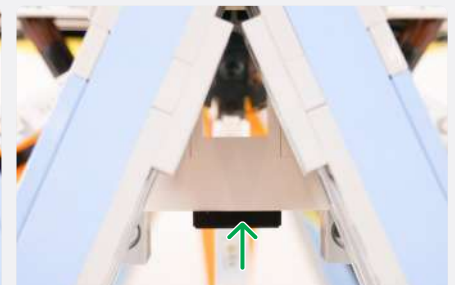

25

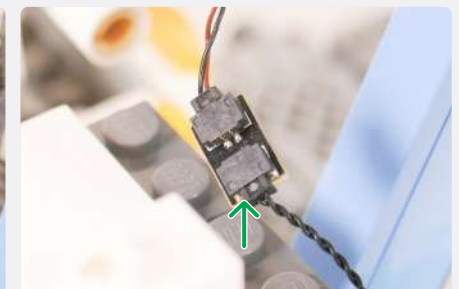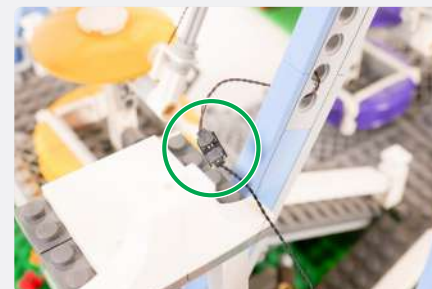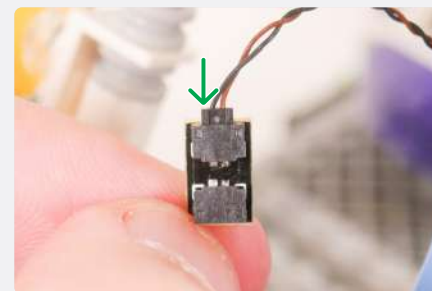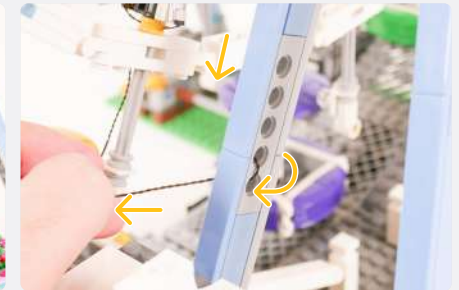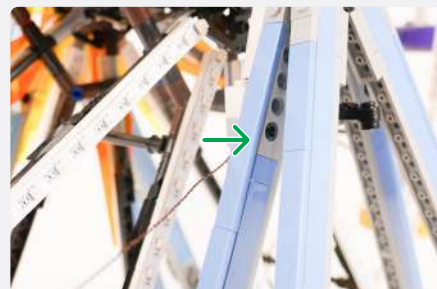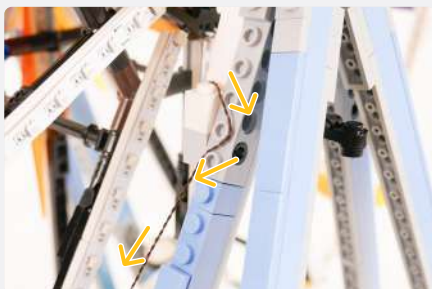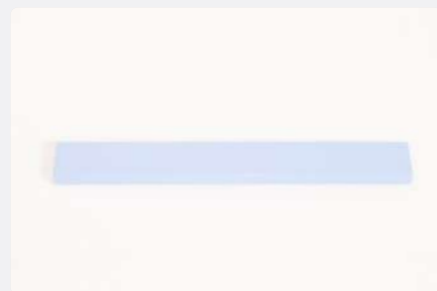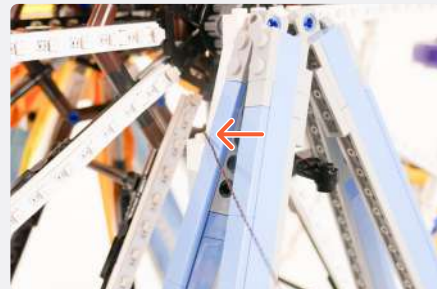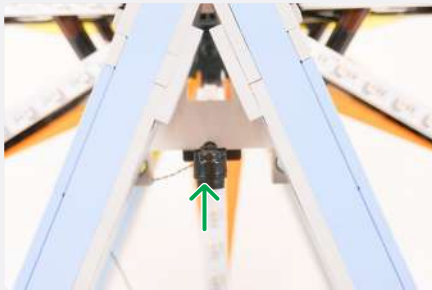






26



**NOTE**

Hold the 2-Port Expansion Board in the following position.

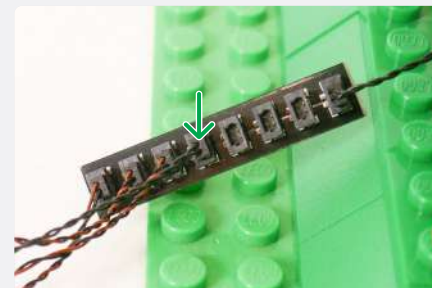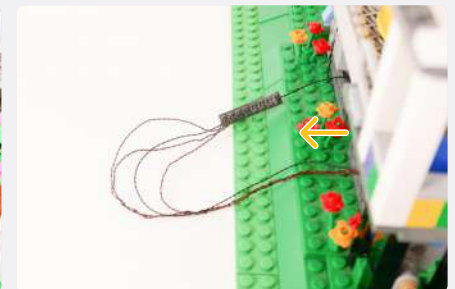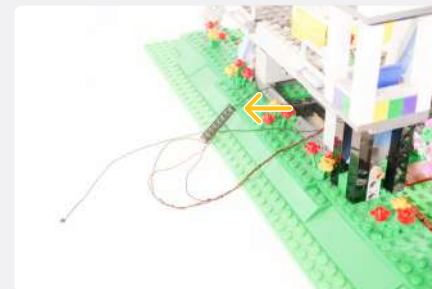

**27**

Warm White 30cm Large Bit Light



Round Plate 1x1 Open Stud - Black



Plate 1x1 Mod Rounded W/ Handle - Black






Tile 1x1 W/ Clip Round Edges - Black





**28**



x2



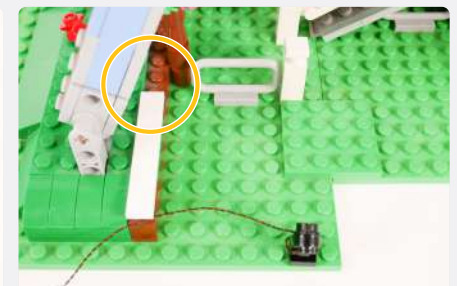
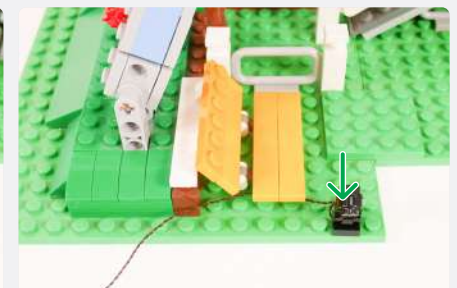
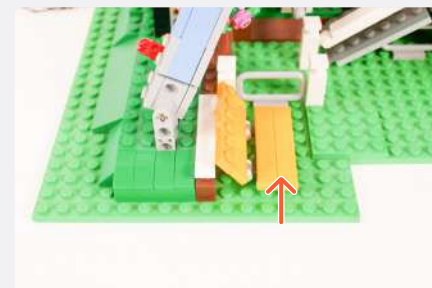




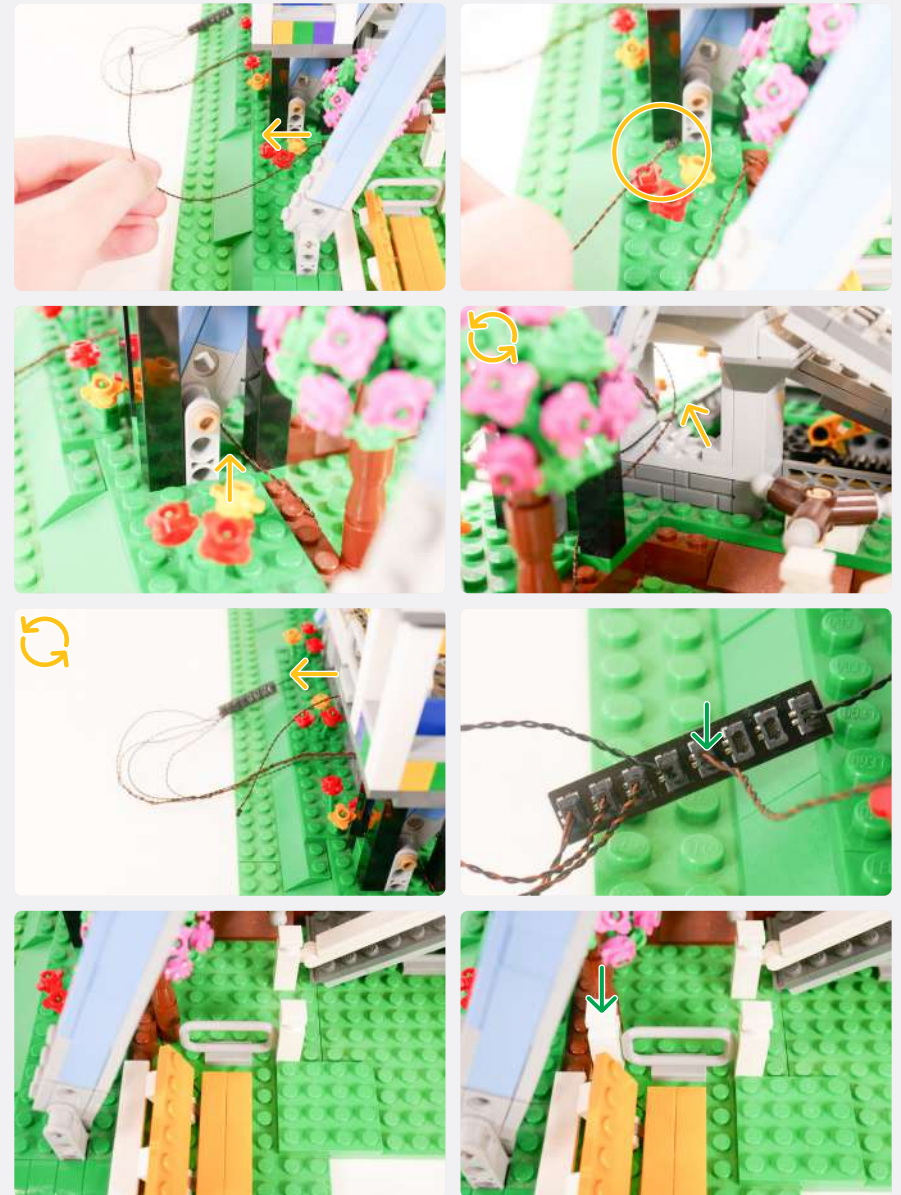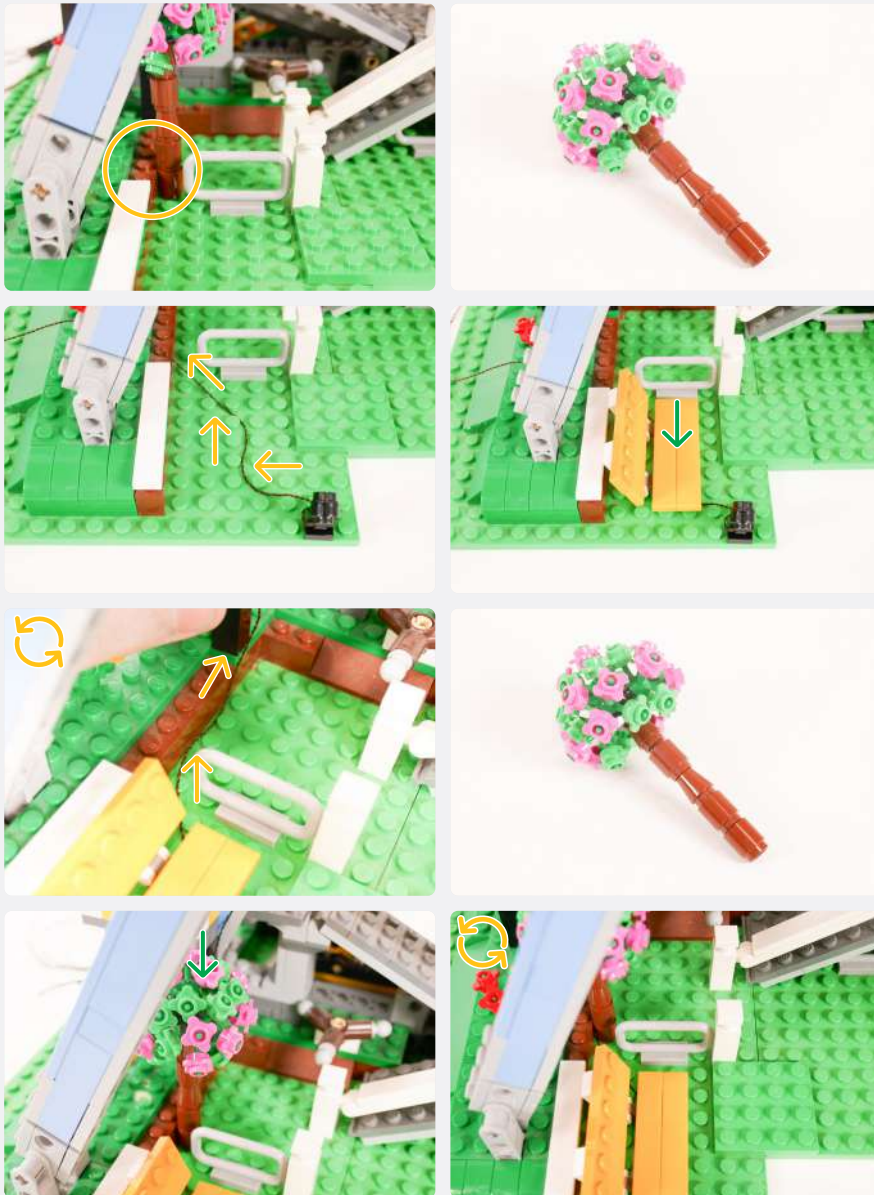



29



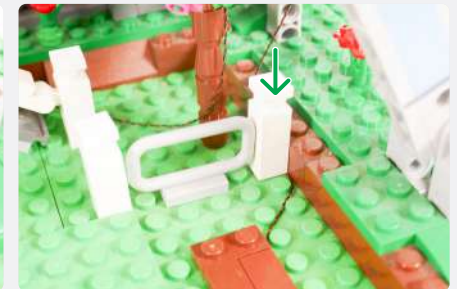
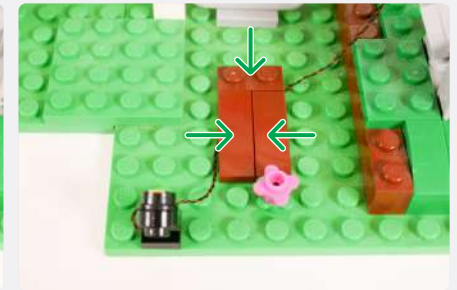
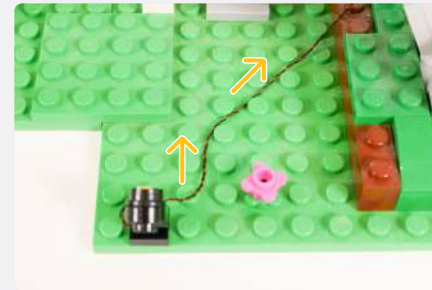
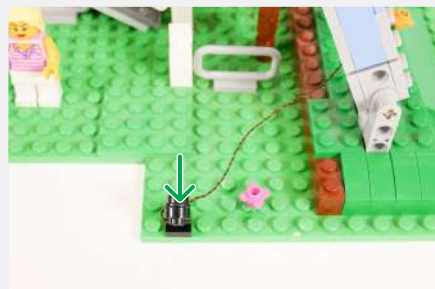
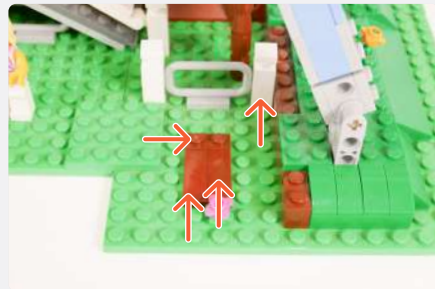


**NOTE**












Reposition the Tree to further secure the cable.



30

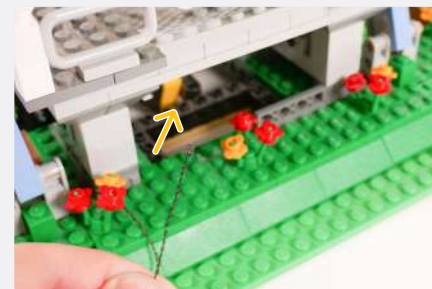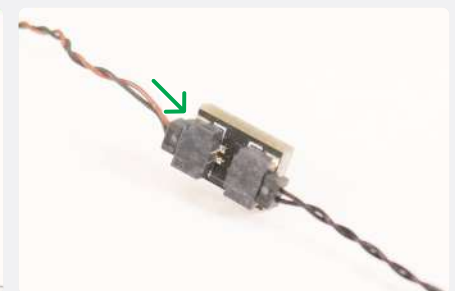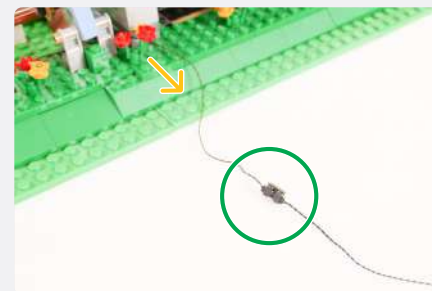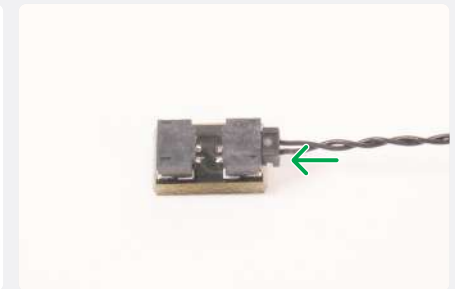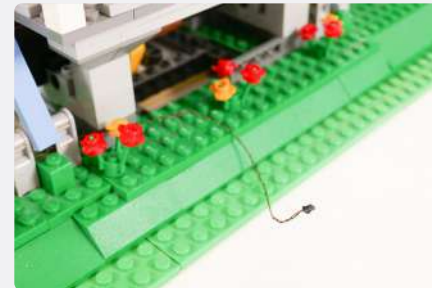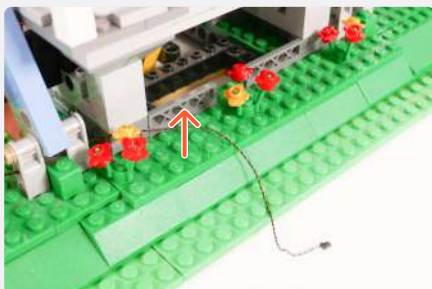
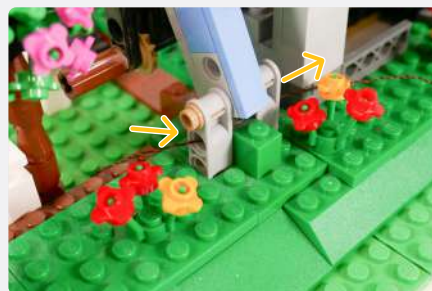




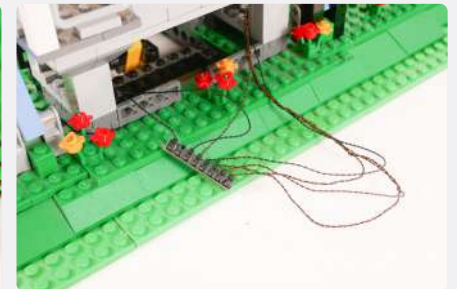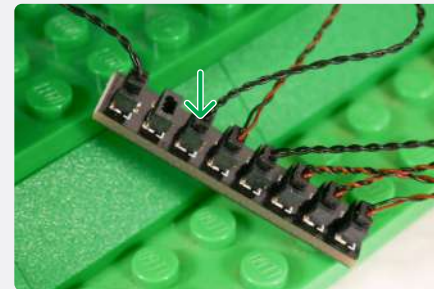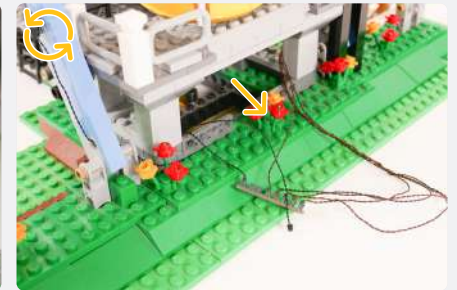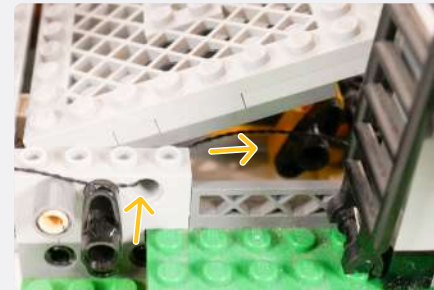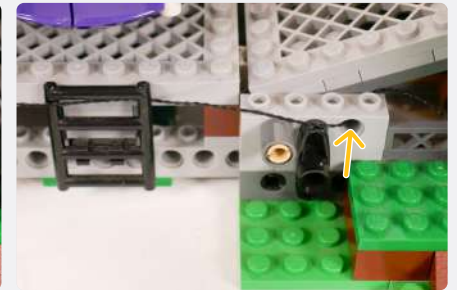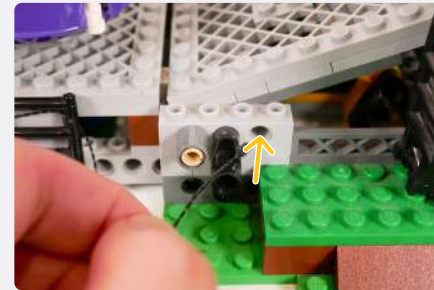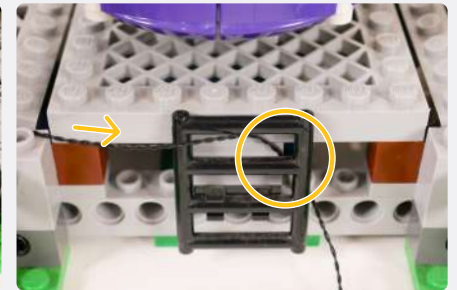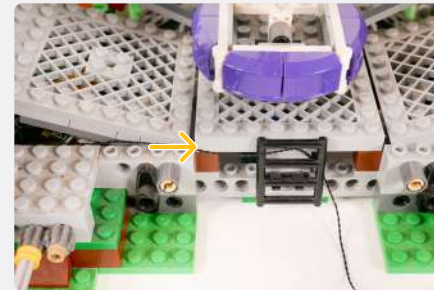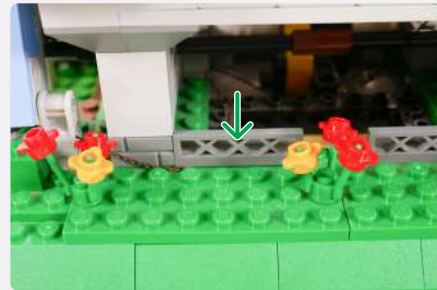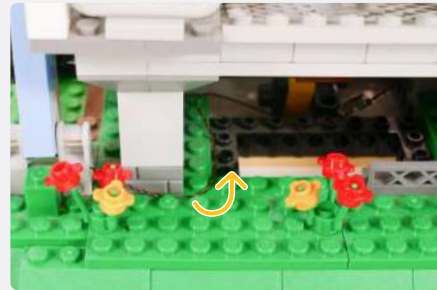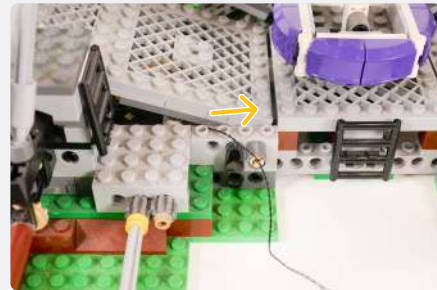




31



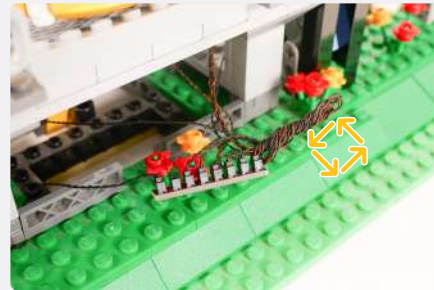
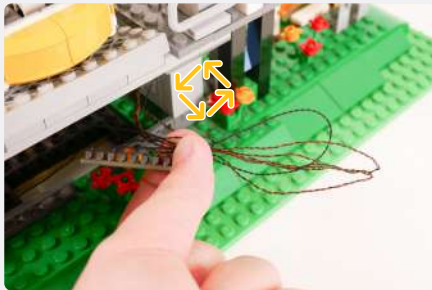


**NOTE**

Connect to a 5V USB Power Bank, 5V USB Wall Adaptor, or USB to AA Battery Pack (sold separately)

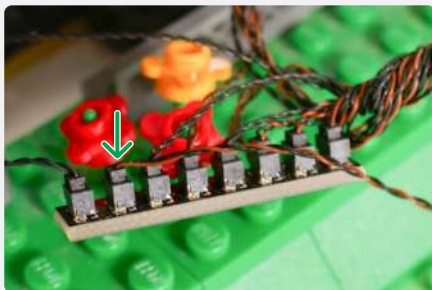


**2x Adhesive Square**

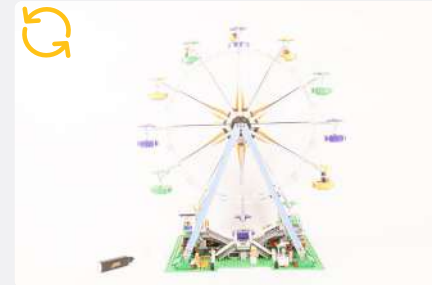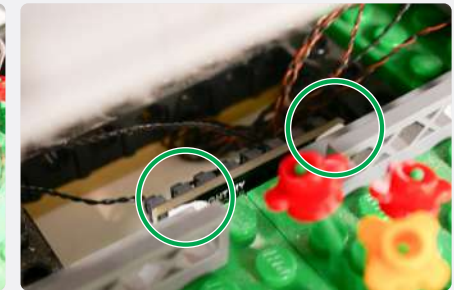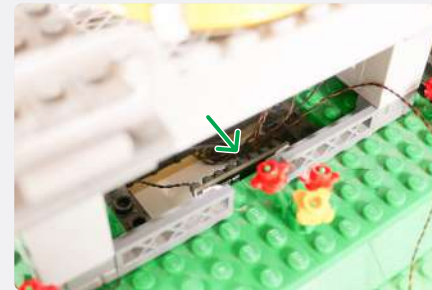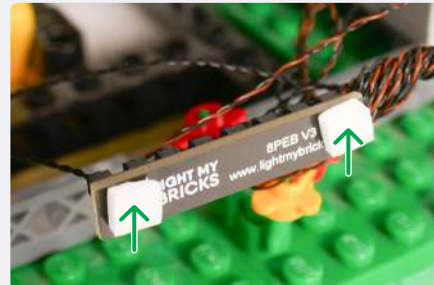

**NOTE**

You should have these parts left over that were removed from the LEGO set

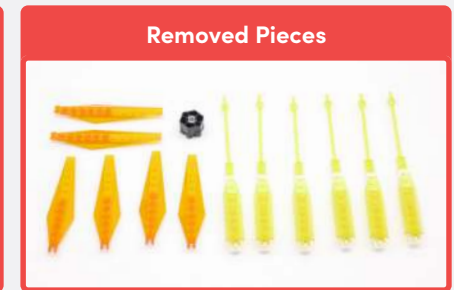

**!** If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section. **i**

## FINAL PRODUCT

This finally completes installation of the Light My Bricks

LEGO® Ferris Wheel 10247 Light Kit.





## TROUBLESHOOTING

Light My Bricks lighting kits contain individual components that are very small and can be easily damaged if not handled correctly.

To prevent unnecessary damage to components, we highly recommend that the User Guide section, **“Important things to note”** is read carefully. Follow the handling procedures in the User Guide to help prevent faults and damages to your Light My Bricks components.

If you are experiencing issues with your Light My Bricks set, watch our troubleshooting video [here](#) or read on for a list of common causes to help you troubleshoot.



## Troubleshooting

**Firstly, ensure that the batteries have power using a battery charge gauge.**


**If the batteries have no power, replace the batteries.**

**If the batteries still have power, check to see if the batteries have been inserted correctly into the battery pack.**

### Check for AA batteries using the AA battery pack

Inside the battery pack are symbols indicating which direction the AA battery should be inserted. The flat side of the battery should be paired with the spring side of the battery pack.

If the batteries have been installed correctly and your kit still isn't operating correctly, the next step is to check the wiring.

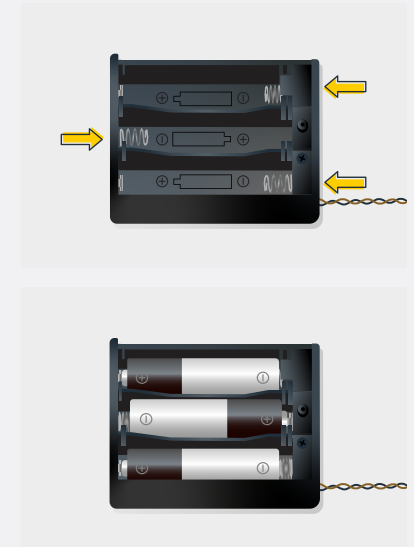

# Troubleshooting

## Check Your Wires



In order for Light My Bricks components to fit in between and underneath LEGO® bricks, the components need to be very small. Due to this nature, Light My Bricks components can be easily damaged when not handled correctly.

Be careful when removing unpacked components out of the packaging and ensure not to forcibly pull at the wires as this can damage the soldering that attach the wires to the LEDs.

If the wiring is detached from the LED itself, the light will not operate.

When connecting lights to your LEGO® set, check that there are no pinched wires underneath or in between bricks and plates.

When the wires are pinched and the exposed wires are touching each other, this can cause a crosswire and the lights to not function correctly.

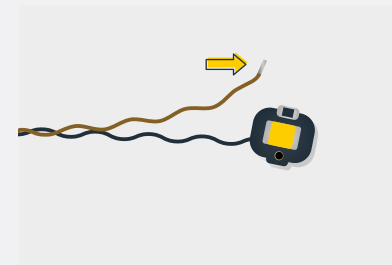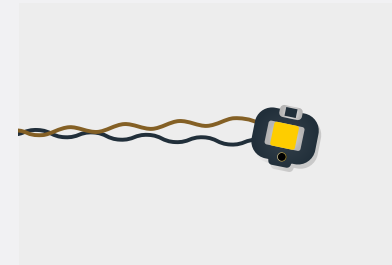


## Troubleshooting

### Check Your Expansion Board Ports / Strip Light Ports / Effects Board Ports

It is important to note that connectors can only be inserted to the expansion board, strip light, or effects board ports in one direction.

Forcibly inserting connectors in the incorrect direction will result in damaging the pins inside each of the ports on your component board.



Not only will a light connected to the damaged port not work, but if the pins inside the port are bent to a point they are touching each other, this can result in all other lights in the system to stop working. This is a short circuit.

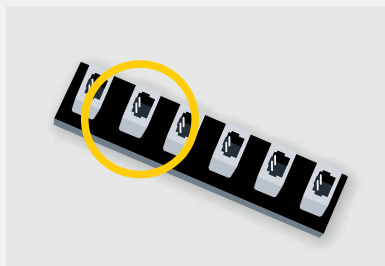

A short circuit can also result in overheating of the board, cable or batteries. If you suspect a short circuit, **DISCONNECT POWER IMMEDIATELY**. Batteries can fail, catch fire, or even explode if left connected to a short circuit for too long.

If you suspect you have a faulty component due to a bent pin, try the following steps:

If you look carefully inside each of the ports, each port contains 2 small pins that should be straight. You will be able to identify a faulty port if it has any bent pins.

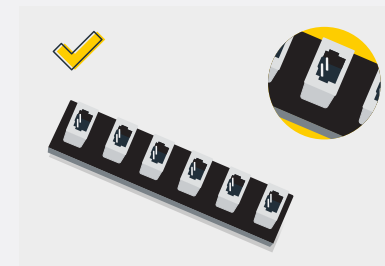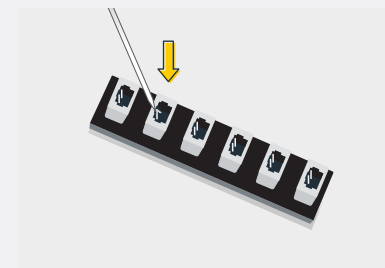





## CONTACT US

If you have an enquiry regarding the online shop, our products or a general enquiry please refer to our Frequently Asked Questions webpage here.

Alternatively, you can contact our Customer Services team by visiting our online support portal here.

[support.lightmybricks.com](https://support.lightmybricks.com)

We thank you for purchasing this product and hope you enjoy!



[lightmybricks.com](https://lightmybricks.com)