



**LIGHT^{MY}
BRICKS**



LEGO[®] EIFFEL TOWER #10307

LIGHT KIT

INSTALLATION GUIDE

Part 2 of 2

Contents

Instructions: Part 2	4
Final Product	69
Troubleshooting	70
Contact	74



INSTRUCTIONS: Part 2

To ensure a smooth installation of your light kit, please read and follow each step carefully. If you run into any issues, please refer to the online troubleshooting guide.


NOTE

This is Part 2 of the Eiffel Tower Light Kit Instructions. If you have not completed Part 1 first, click the box.

Click me!


Part 1

[Links to instructions portal page](#)

1


NOTE

Ensure the 2nd level of the Eiffel Tower lines up with the first. The correct side has the flat plates and studs in the following locations.

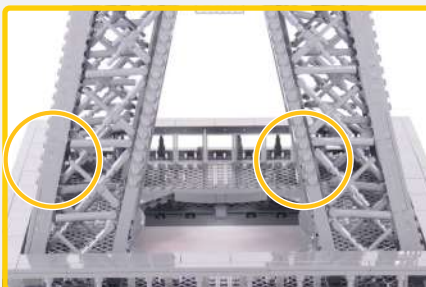




RGB IR Control Board




15cm Connecting Cable


NOTE



Connect the 15cm Connecting Cable into the "+5V" port on the RGB IR Control Board.

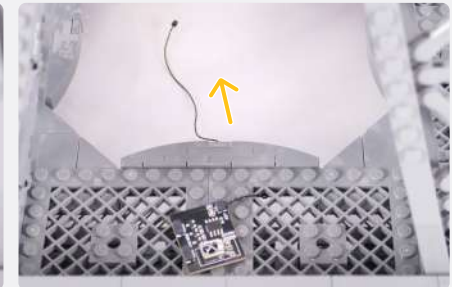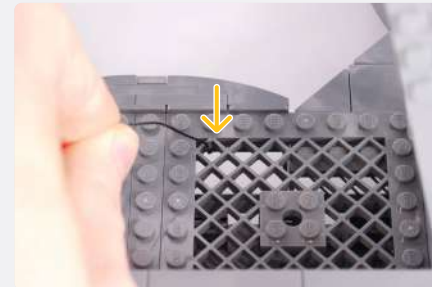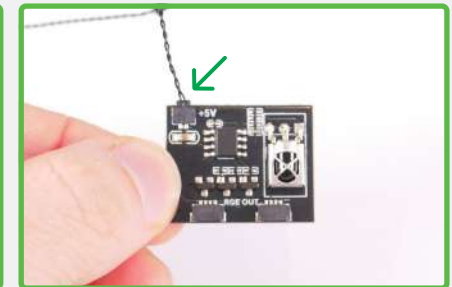


6-Port Expansion Board

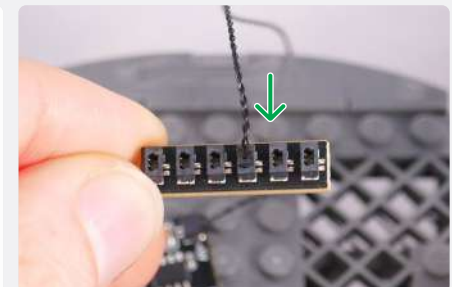





2

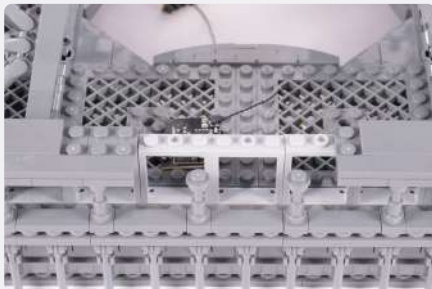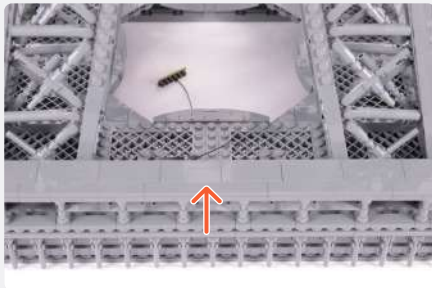

RGB 30cm Connecting Cable

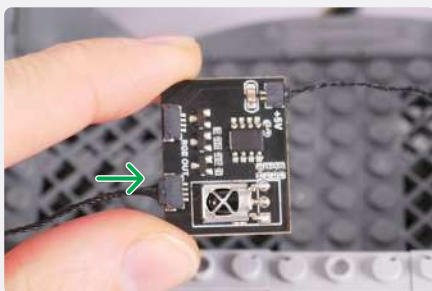








2x Adhesive Square

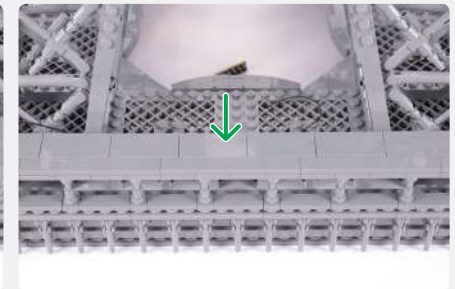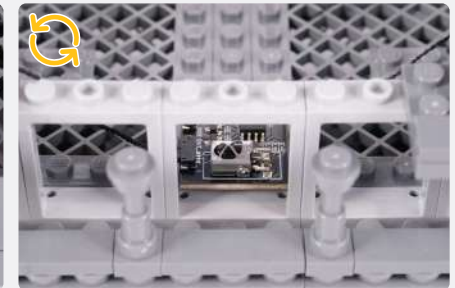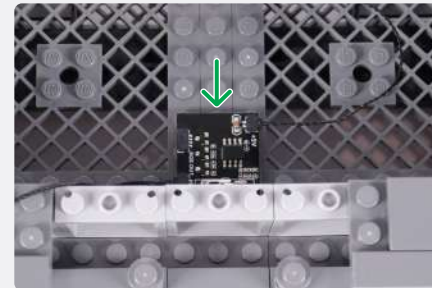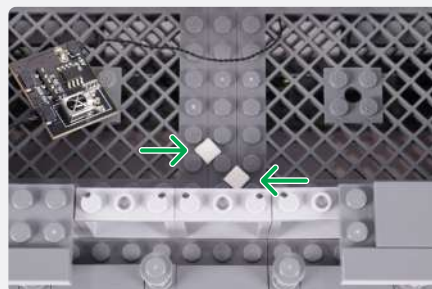

3



50cm Connecting Cable

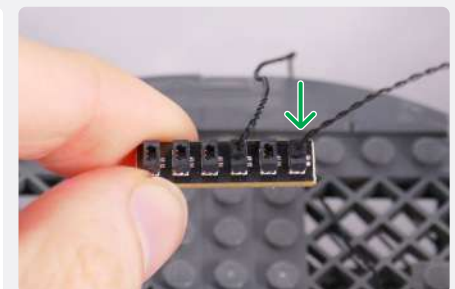

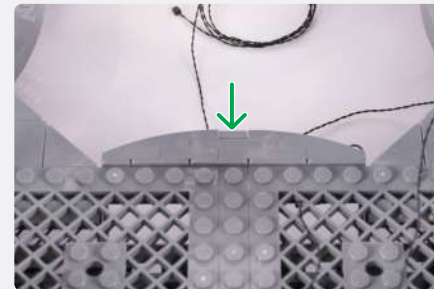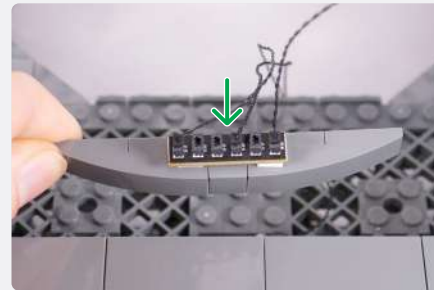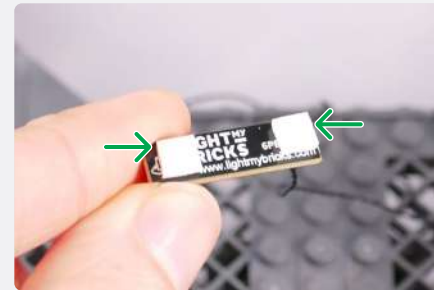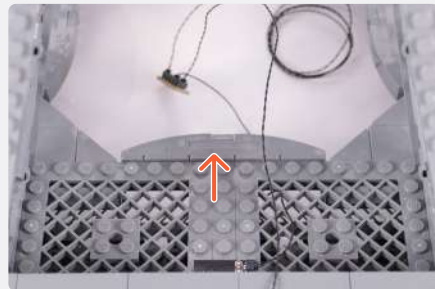
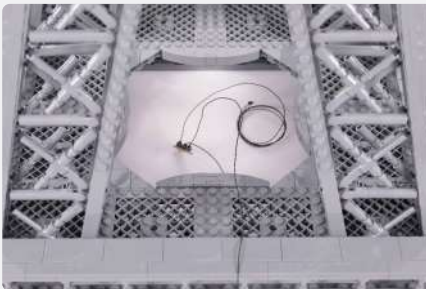
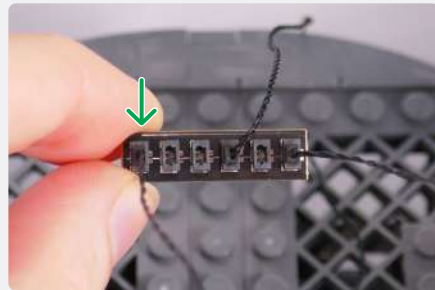


NOTE

Twist the 15cm Connecting Cable and fold it under the 6-Port Expansion Board.





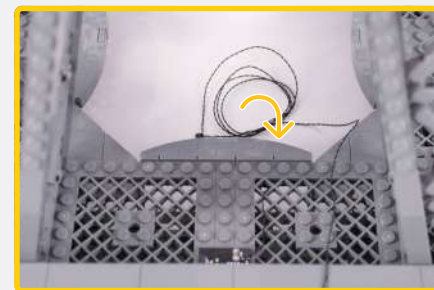
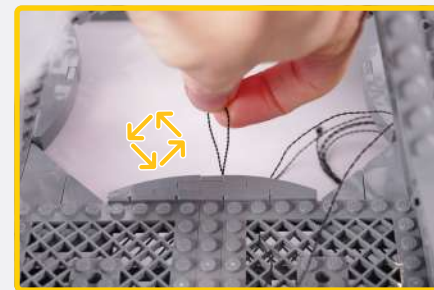


4

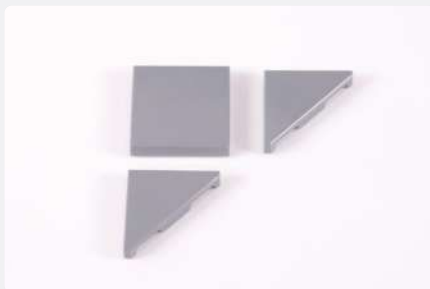
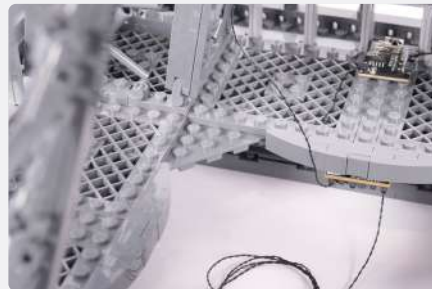
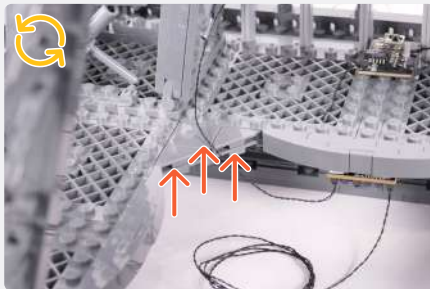



NOTE

For Steps 4-5, use one 50cm Connecting Cable while leaving one 50cm Connecting Cable for a later step.

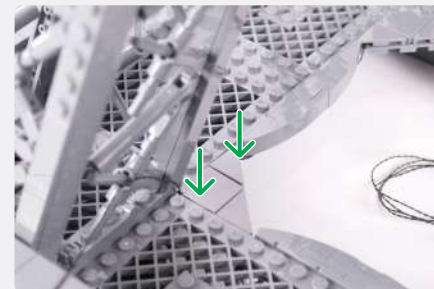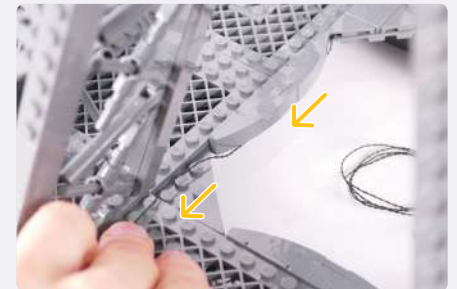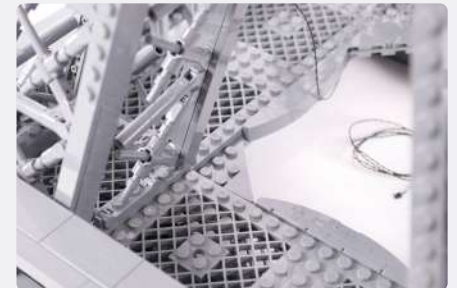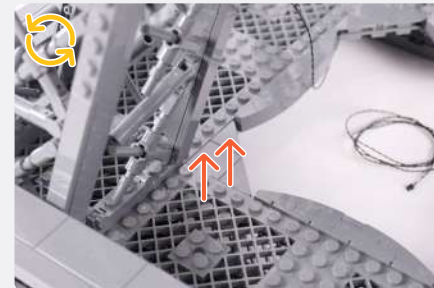
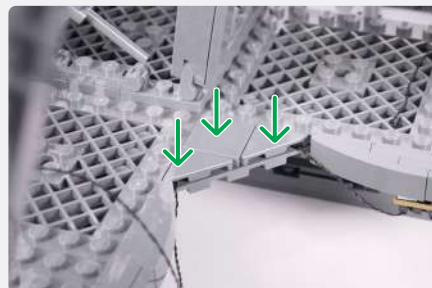
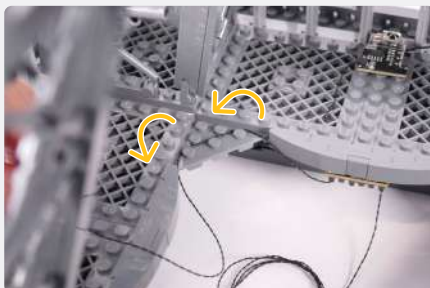



5

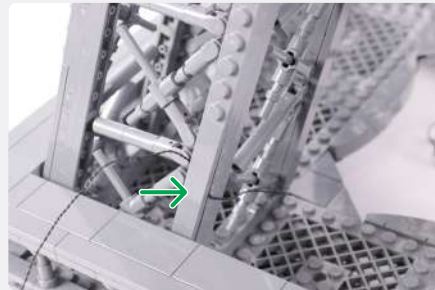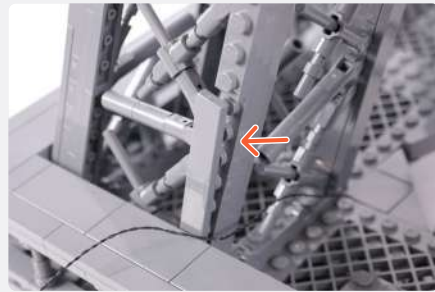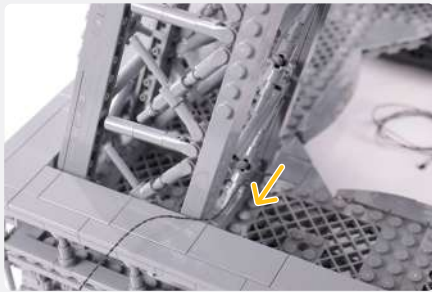

 **NOTE**

Bend the loose end of the Connecting Cable to look like pictured, to more easily wrap it around the beams.

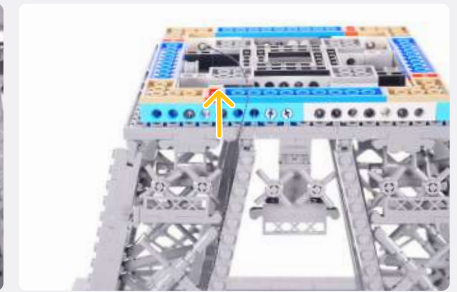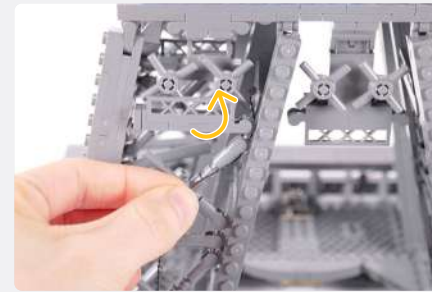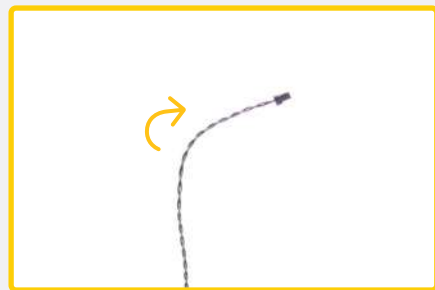

 **NOTE**








Leave the 50cm Connecting Cable loose for a later step.



6









NOTE



Take the loose RGB Connecting Cable and thread it up the left column.

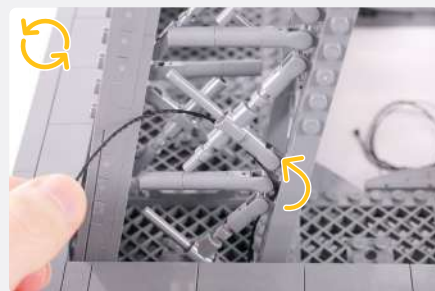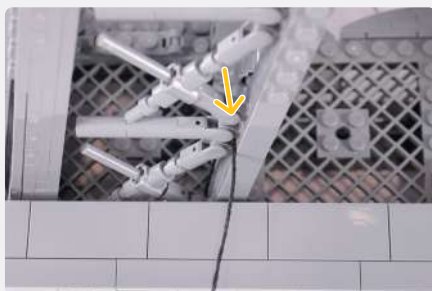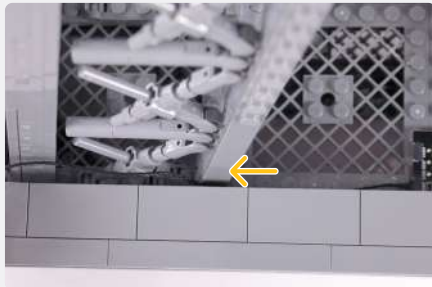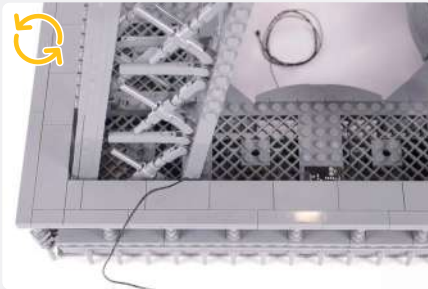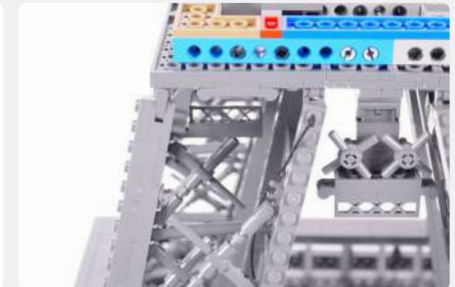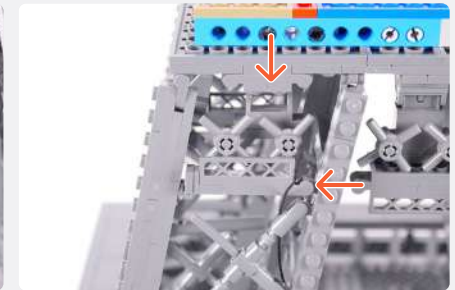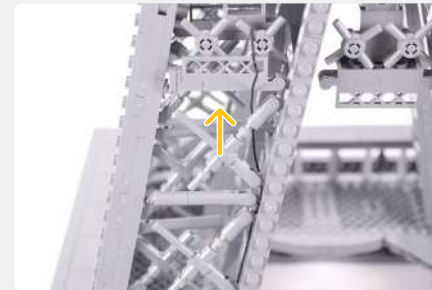
7

Tile 1x6 - Black

Brick 1x2 - Black

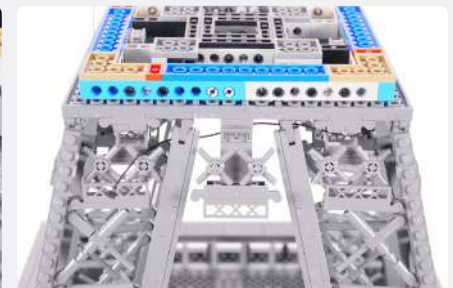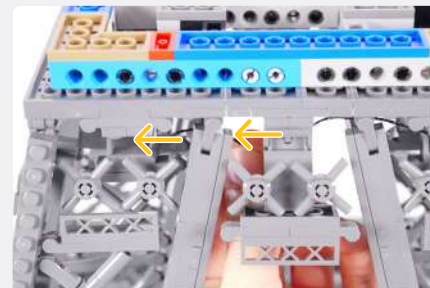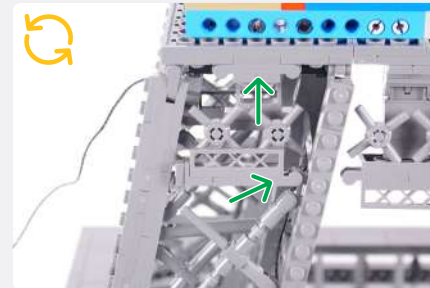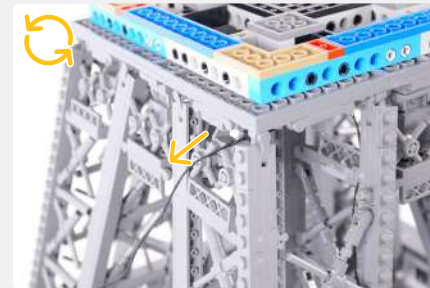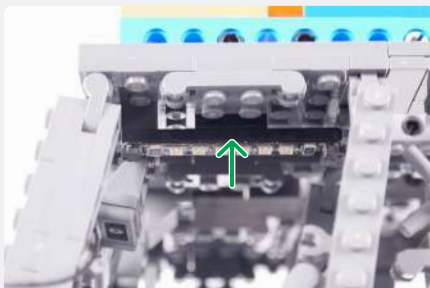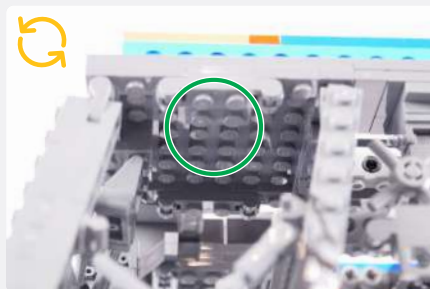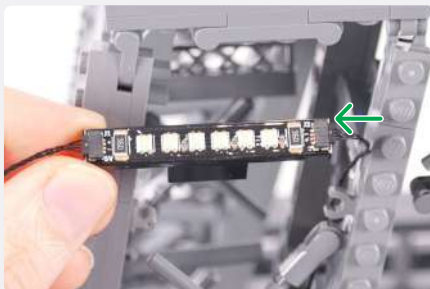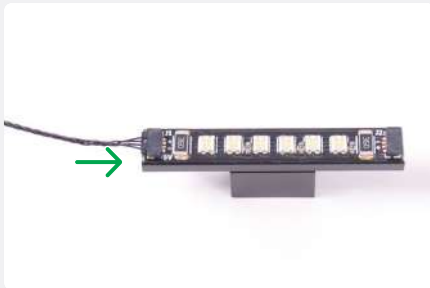RGB Strip Light 2.0

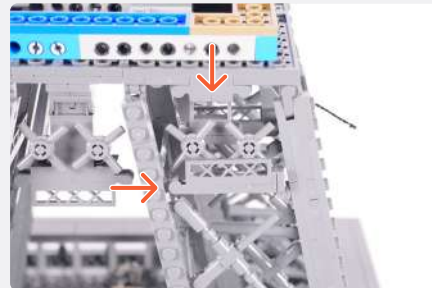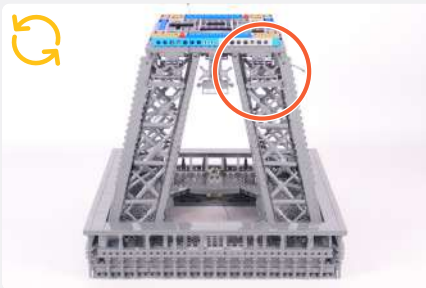

10

Tile 1x6 - Black




Brick 1x2 - Black






RGB Strip Light 2.0







RGB 15cm Connecting Cable

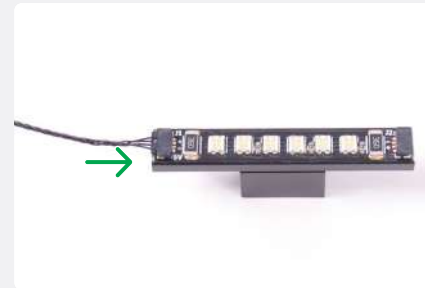


11

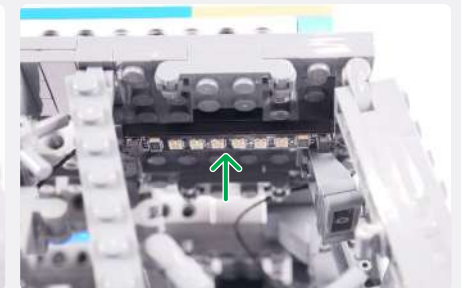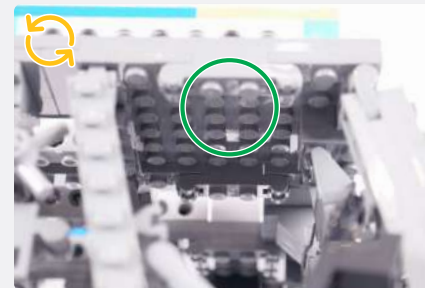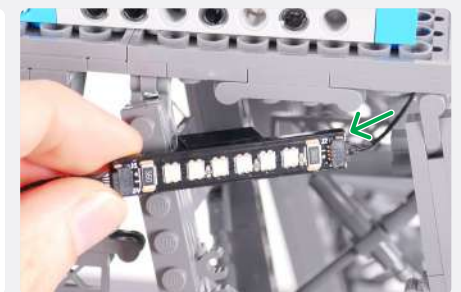

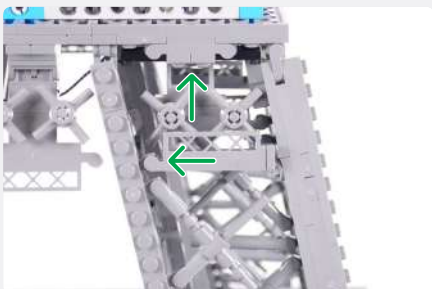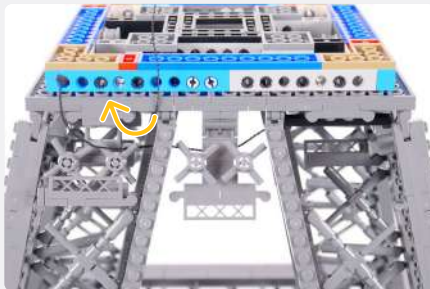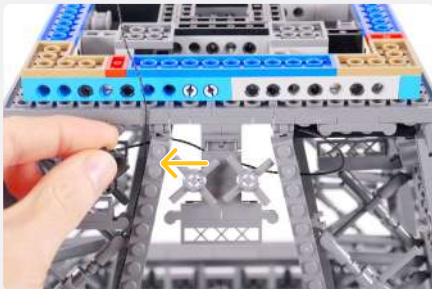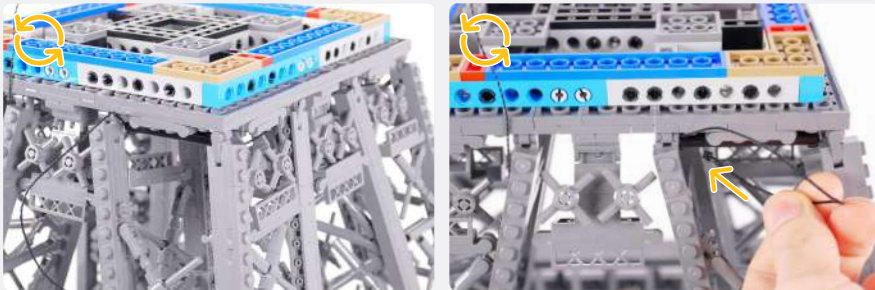


12

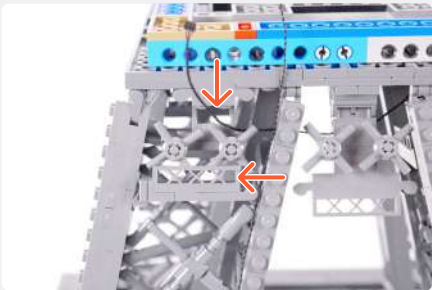

Tile 1x6 - Black




Brick 1x2 - Black

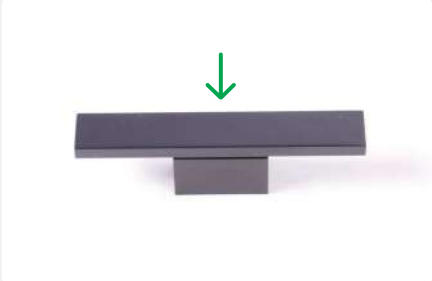









RGB Strip Light 2.0





RGB 15cm Connecting Cable

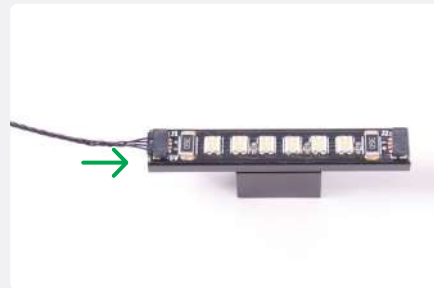

13

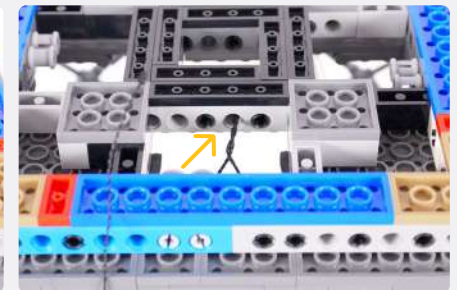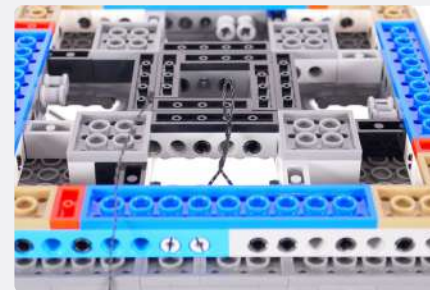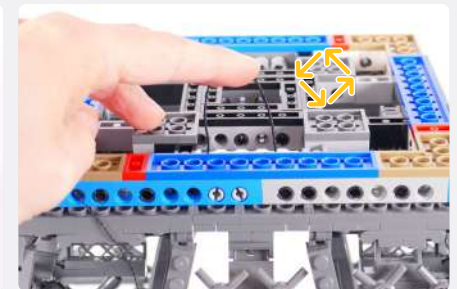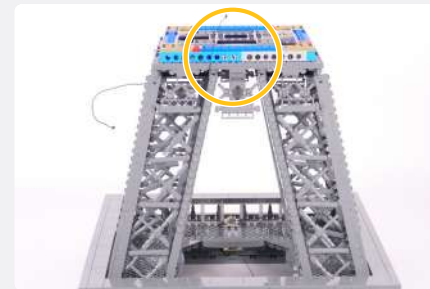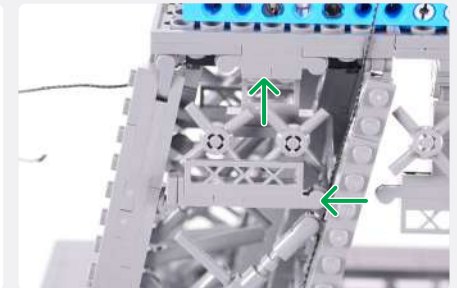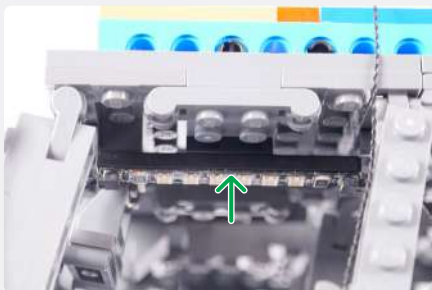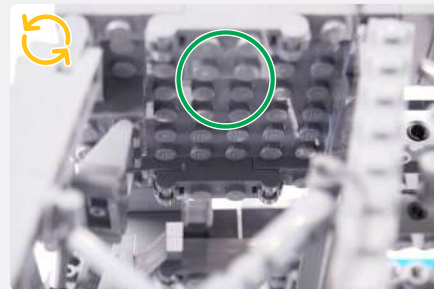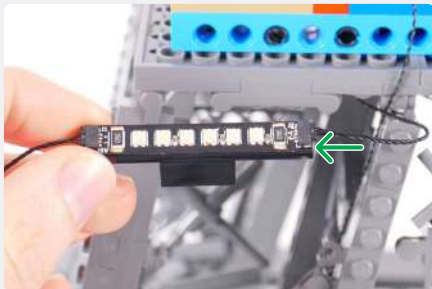

14

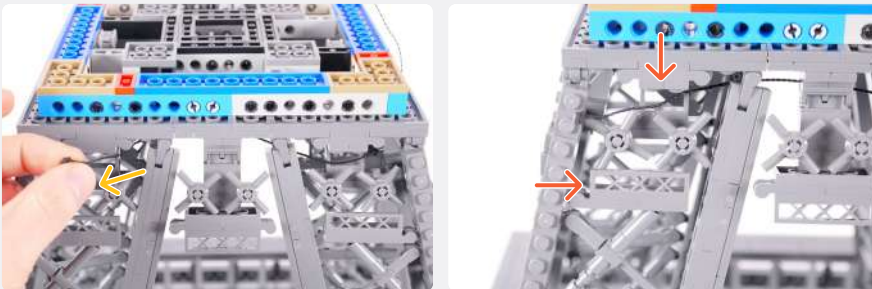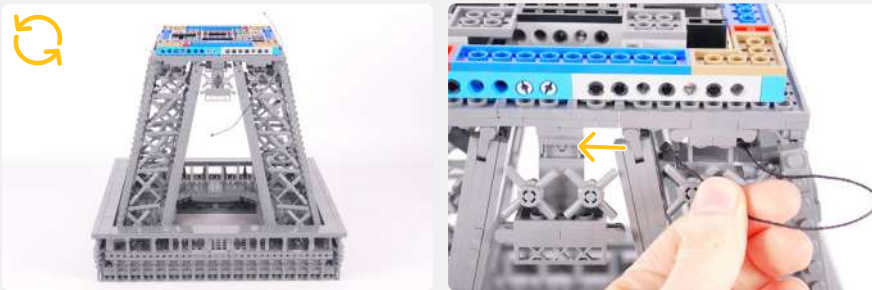


Tile 1x6 - Black


Brick 1x2 - Black




15

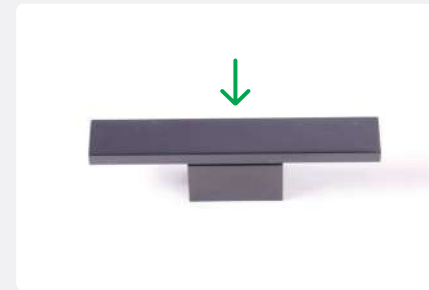


RGB Strip Light 2.0

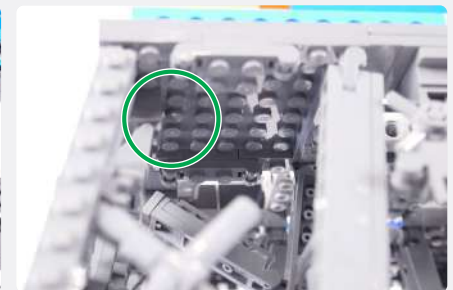

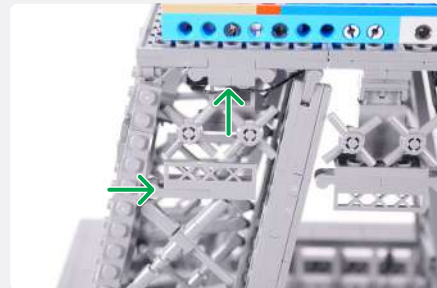



IR Switch Board



USB Power Cable


NOTE



Connect the USB Power Cable into the "+5V" port of the IR Switch Board.

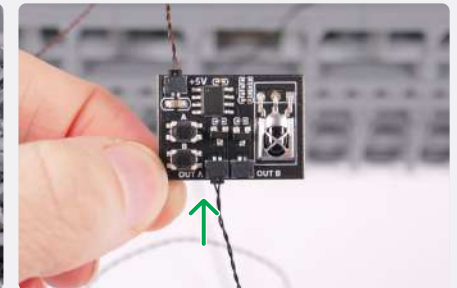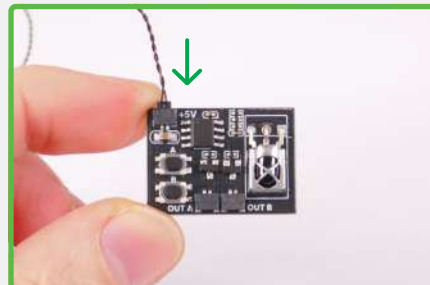
NOTE

Connect to a 5V USB Wall Adaptor (sold separately). A power bank or battery pack is not recommended to power this set.


NOTE

Press the R, G, and B buttons on the Remote, aimed at the RGB IR board, to change the Strip Lights to Red, Green, and Blue to test if they are working.

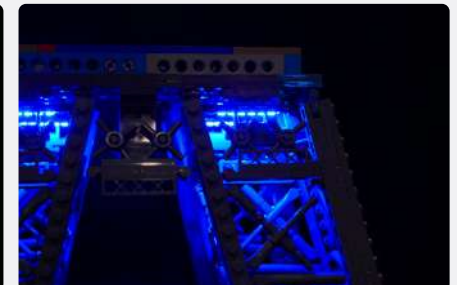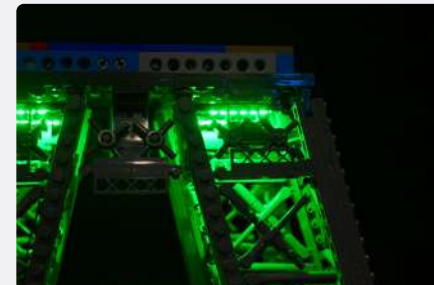


! If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section. i

17










NOTE



Disconnect the USB and IR Switch Board from the light kit and leave the 50cm Connecting Cable in its original position.

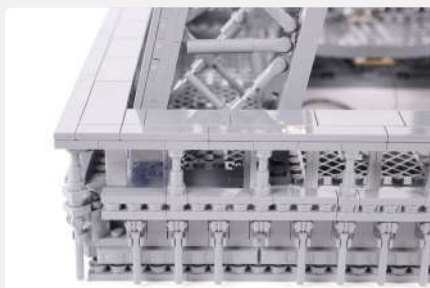

Light String 15 LED 3Pin - Warm White







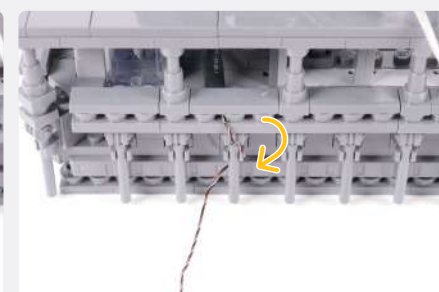
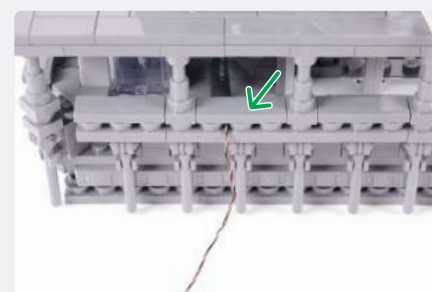
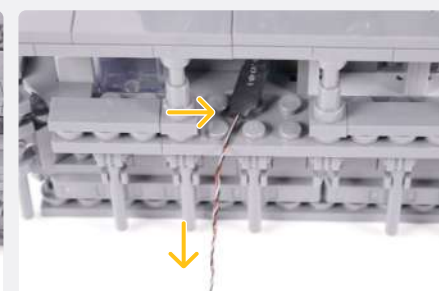
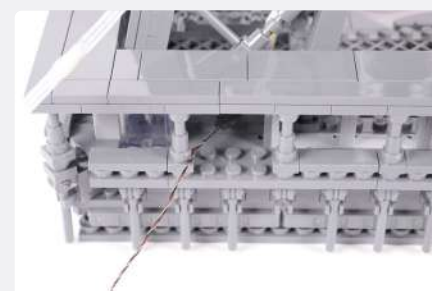
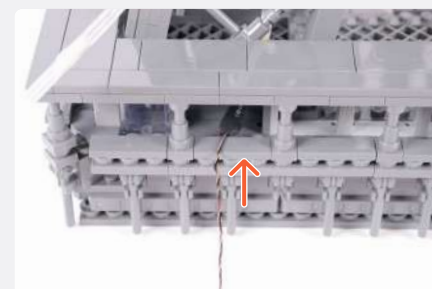
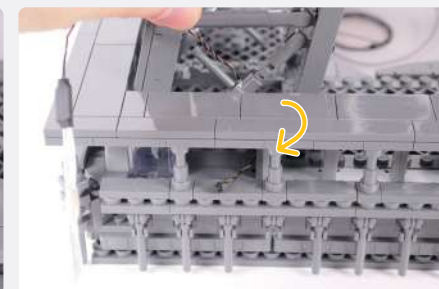
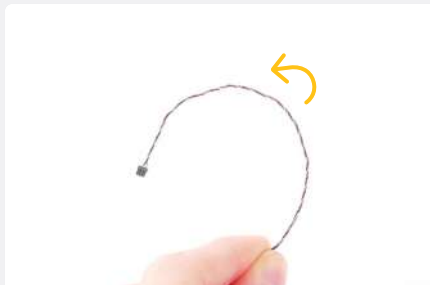


18

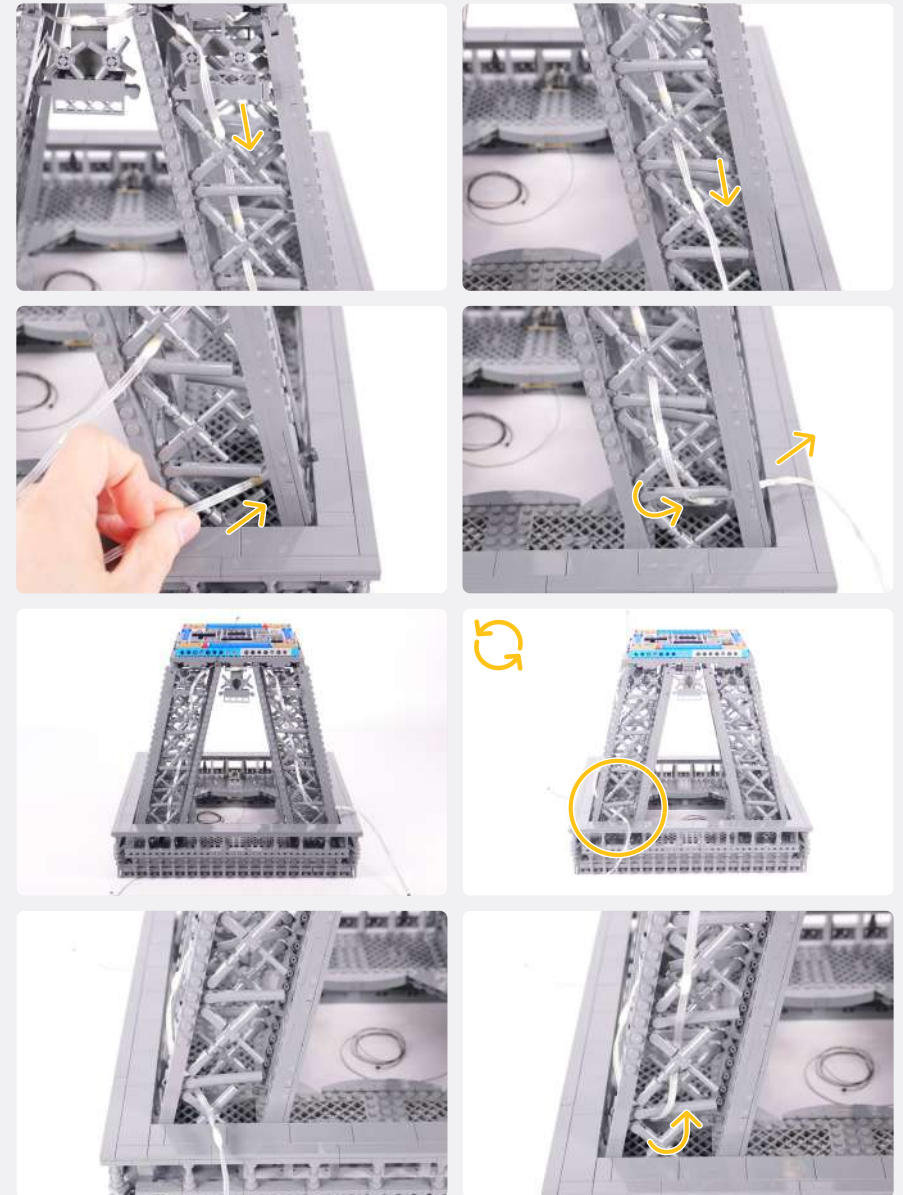
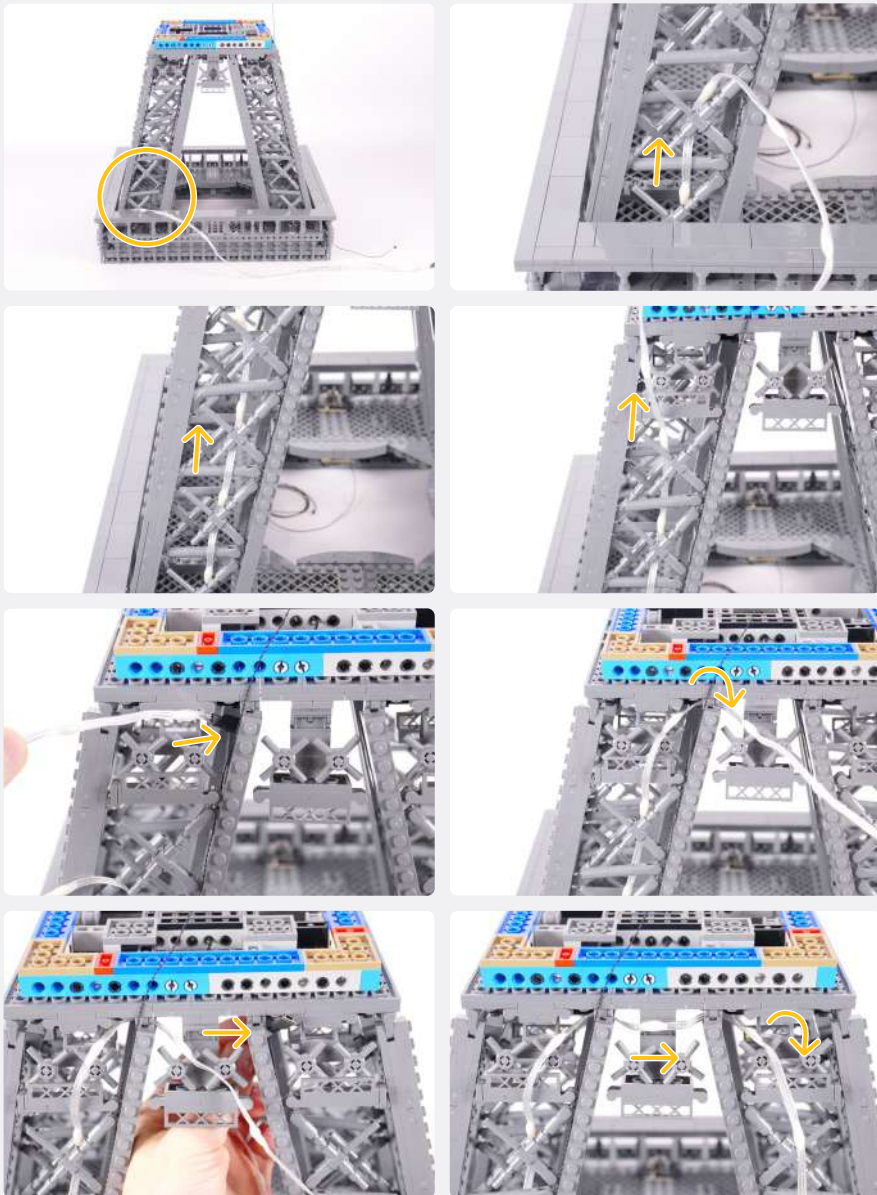


19











Light String 15 LED 3Pin - Warm White

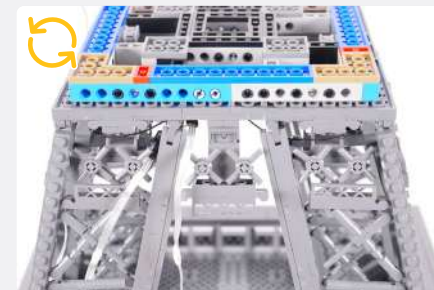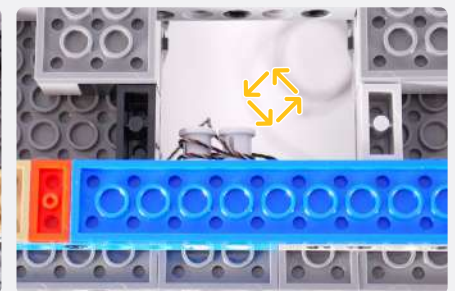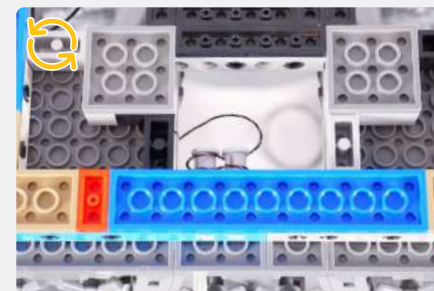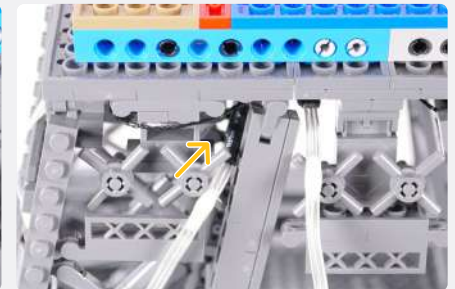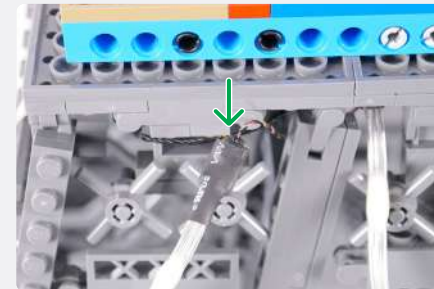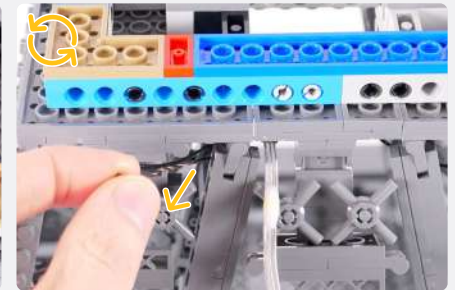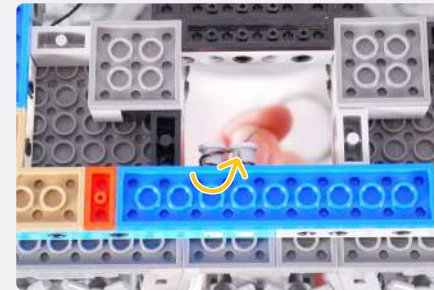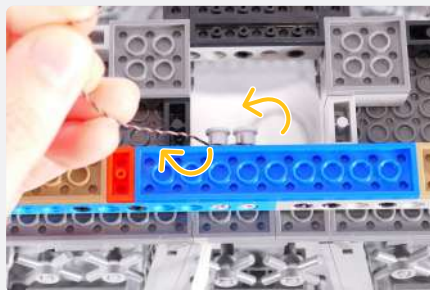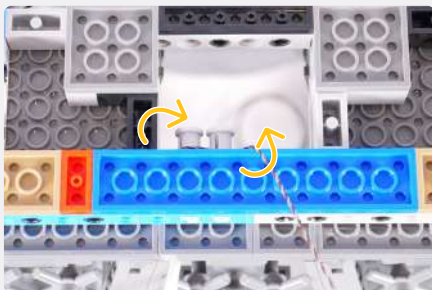
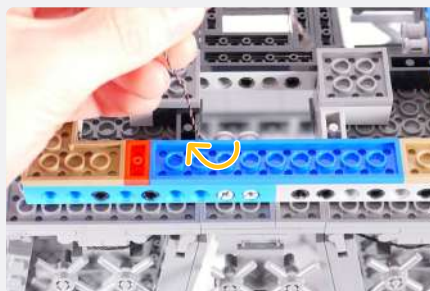
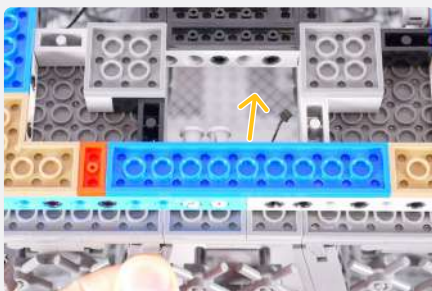
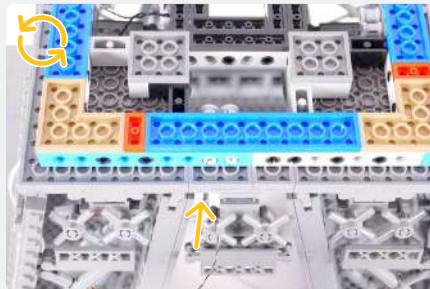
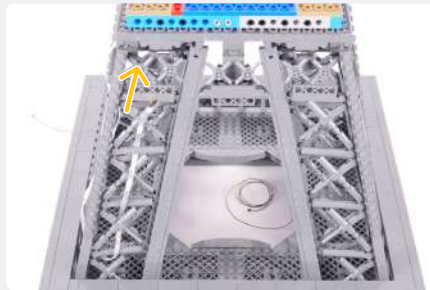


20

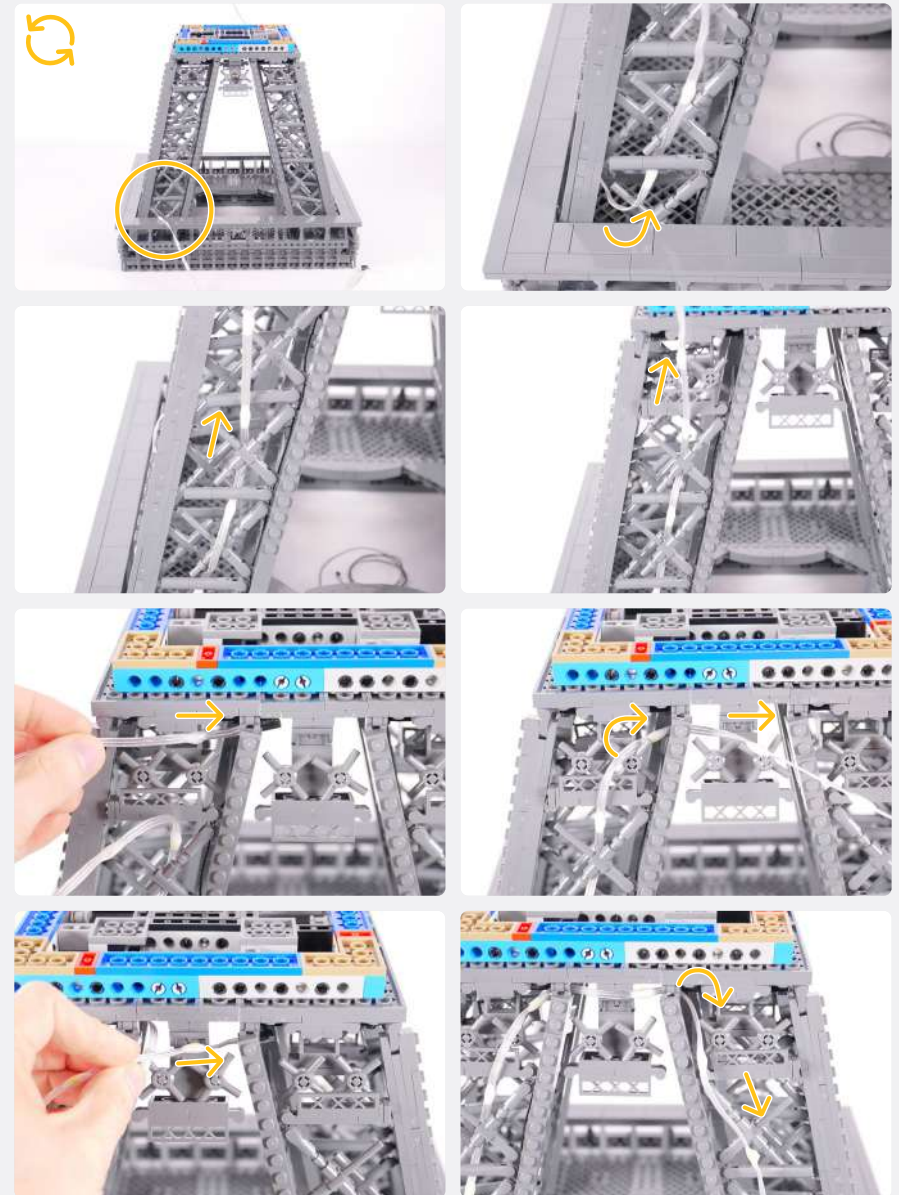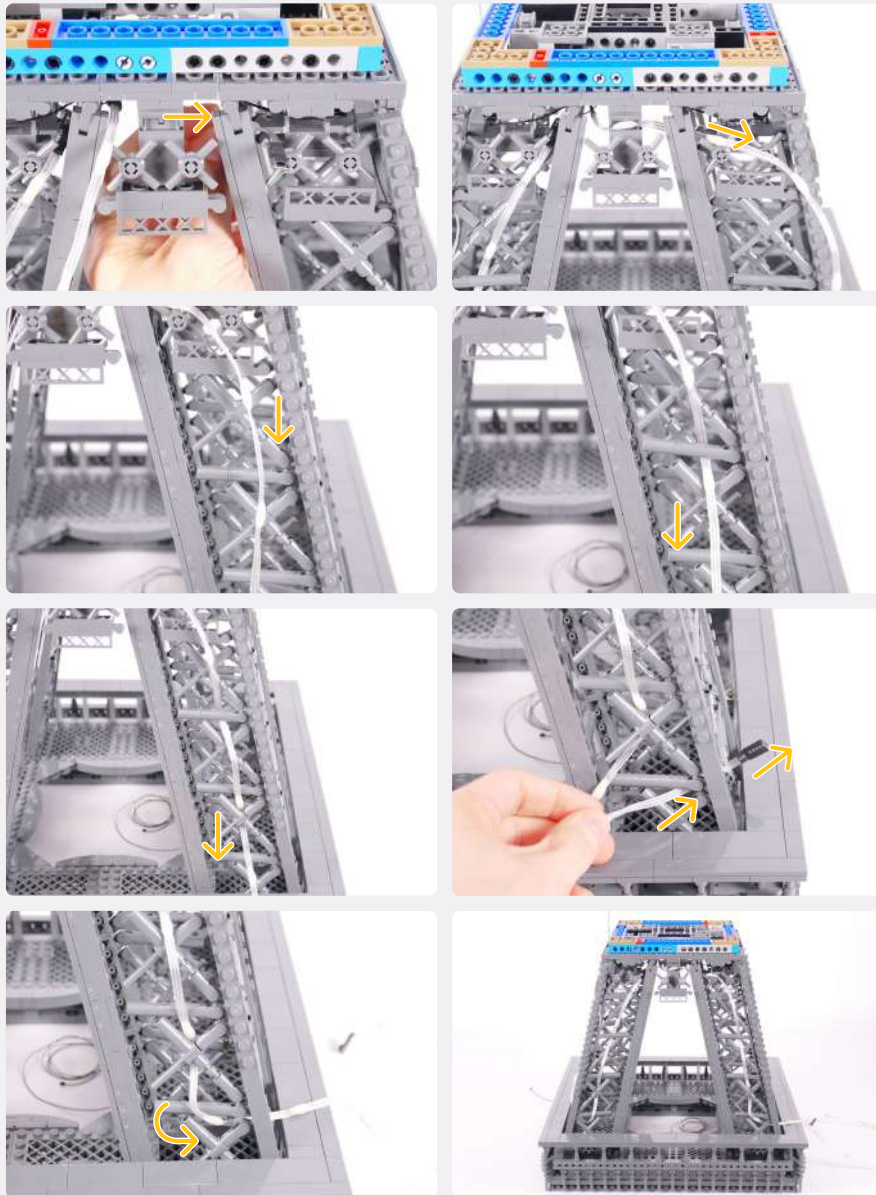

21

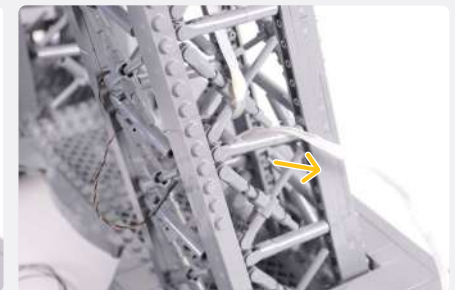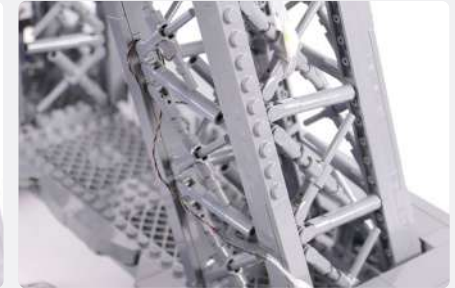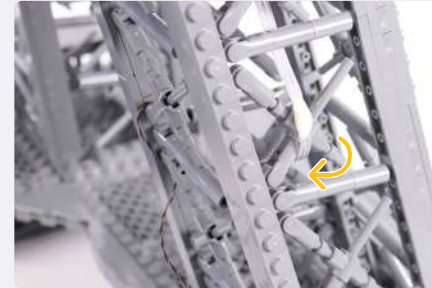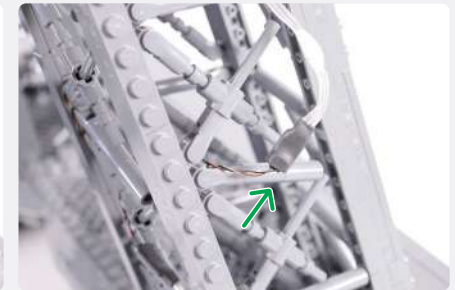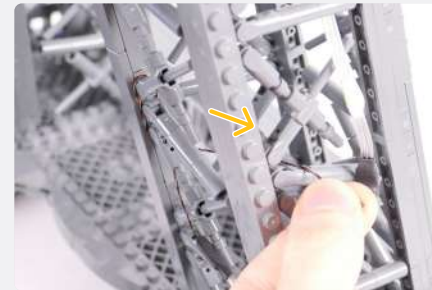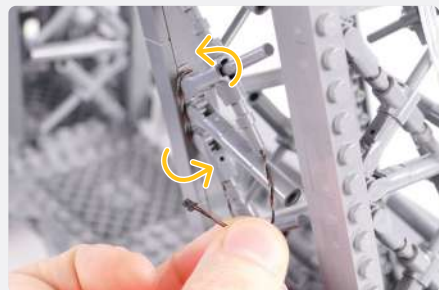
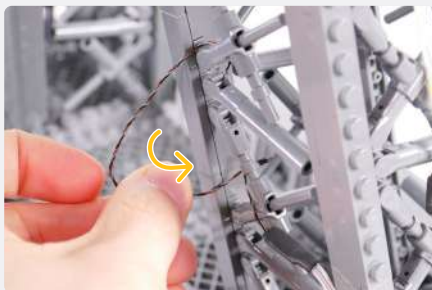
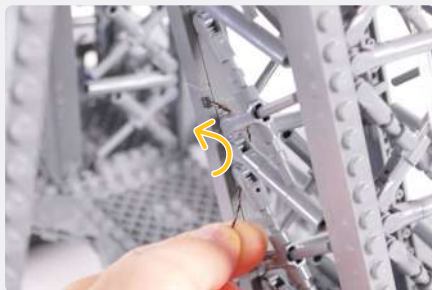
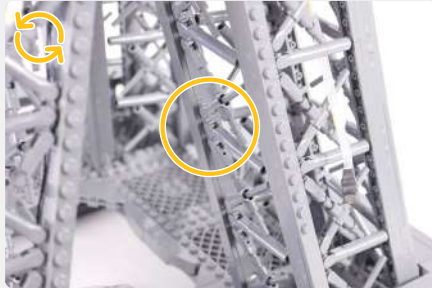
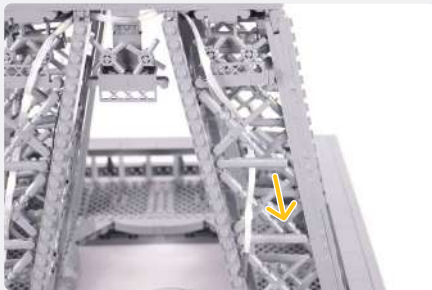


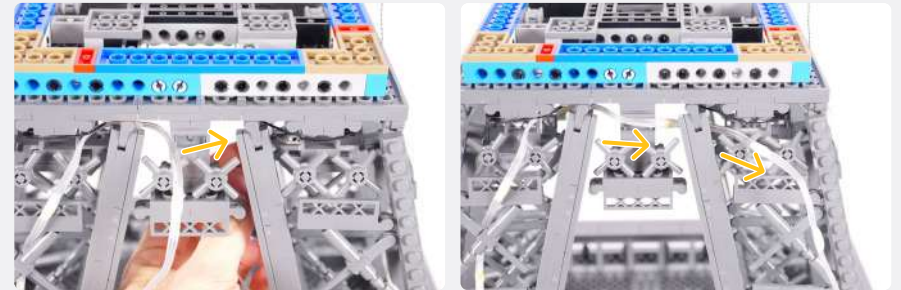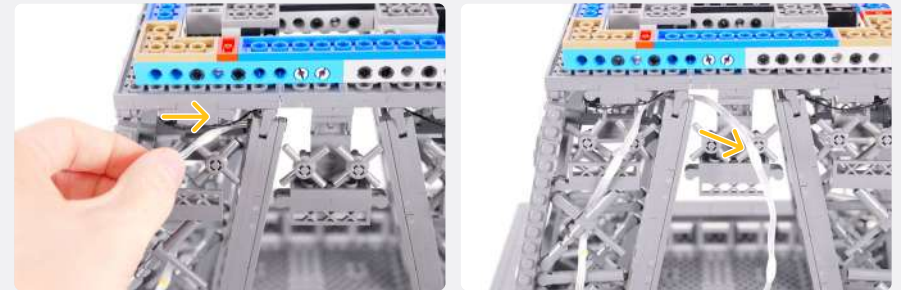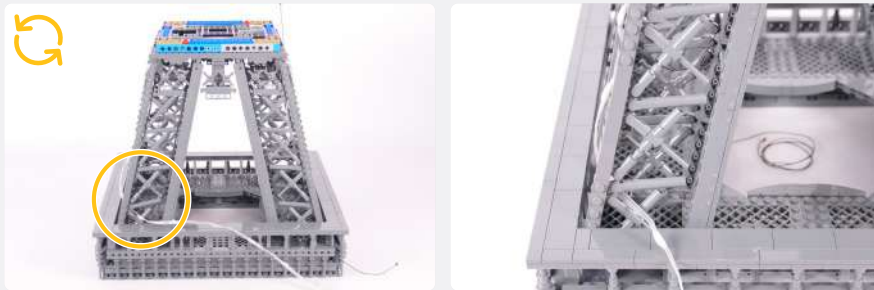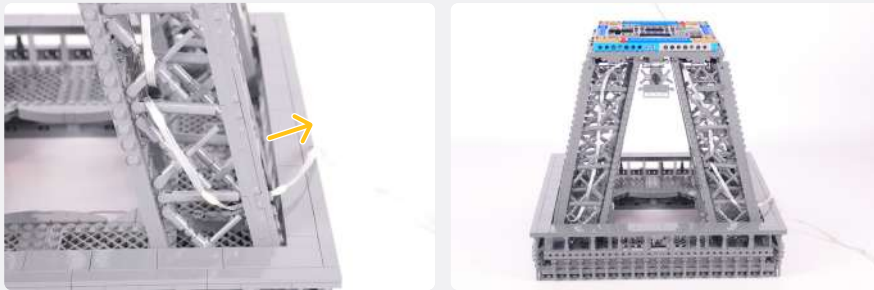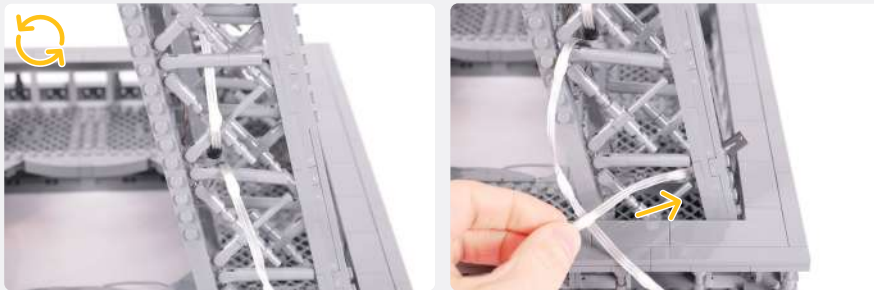


22

NOTE

Leave the end of the String Light loose to connect to the bottom section later.


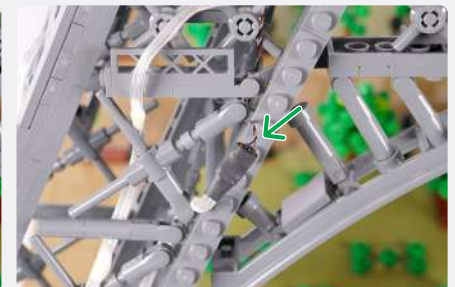
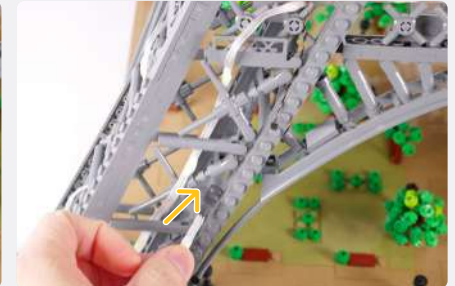
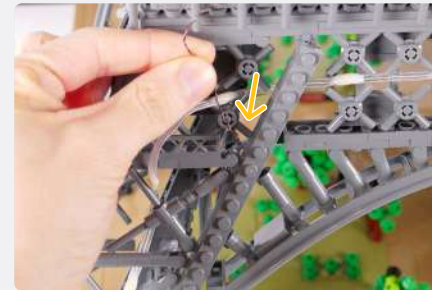
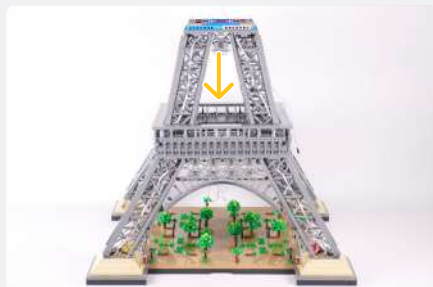
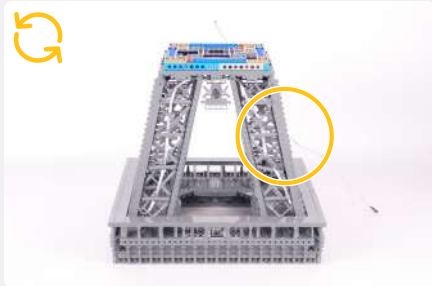


23

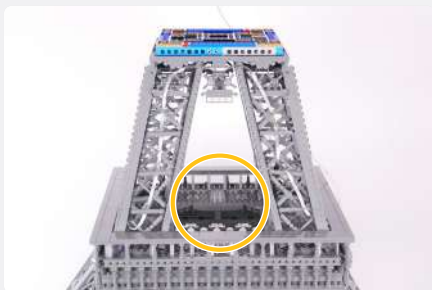

NOTE

Take the 15cm Connecting Cable from the bottom level in Part 1, and connect it to the 6-Port Expansion Board.

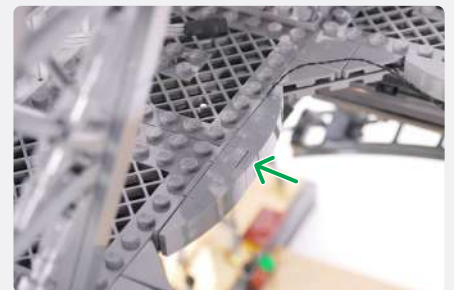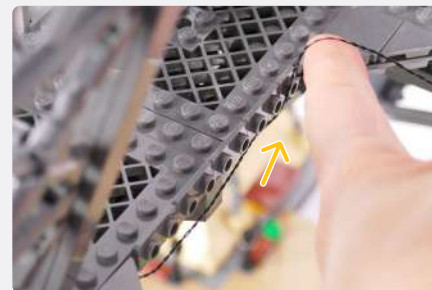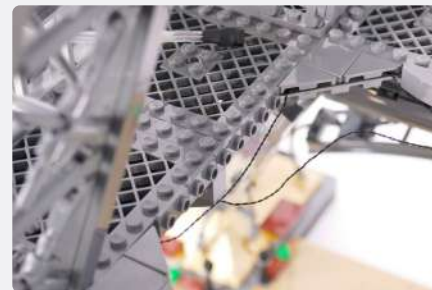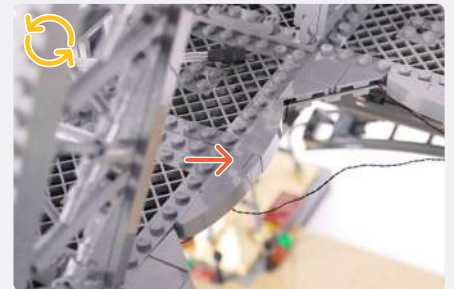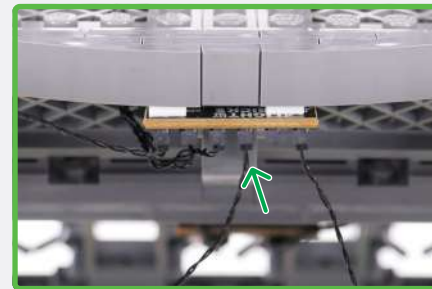
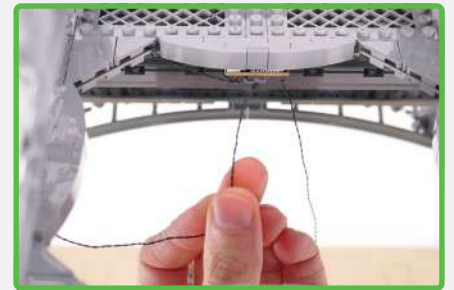


25






NOTE

Take the 50cm Connecting Cable that is loose from Step 3.

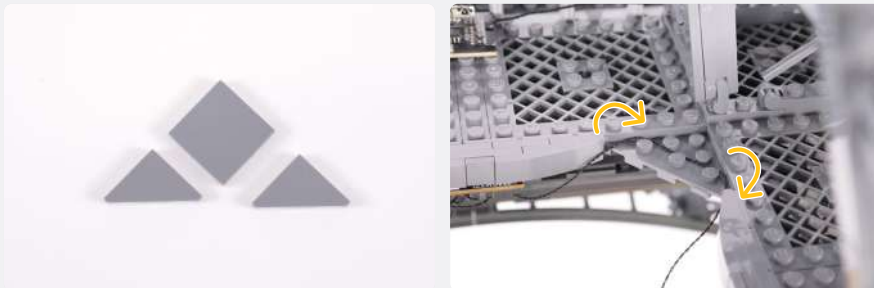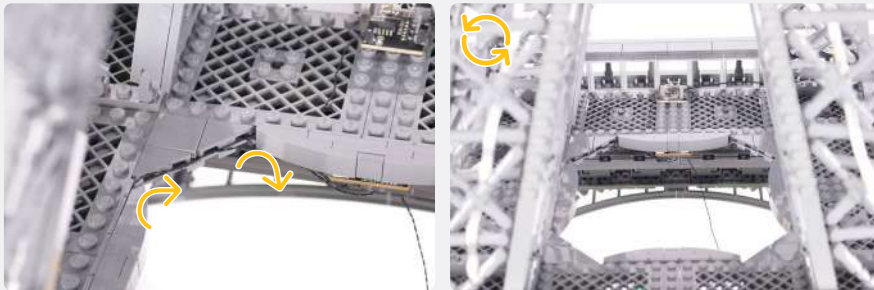


26

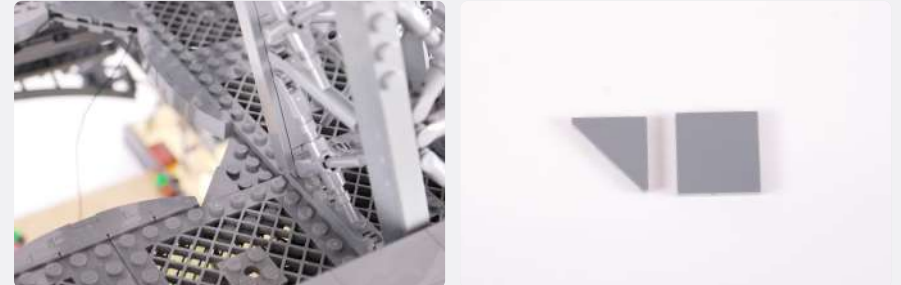

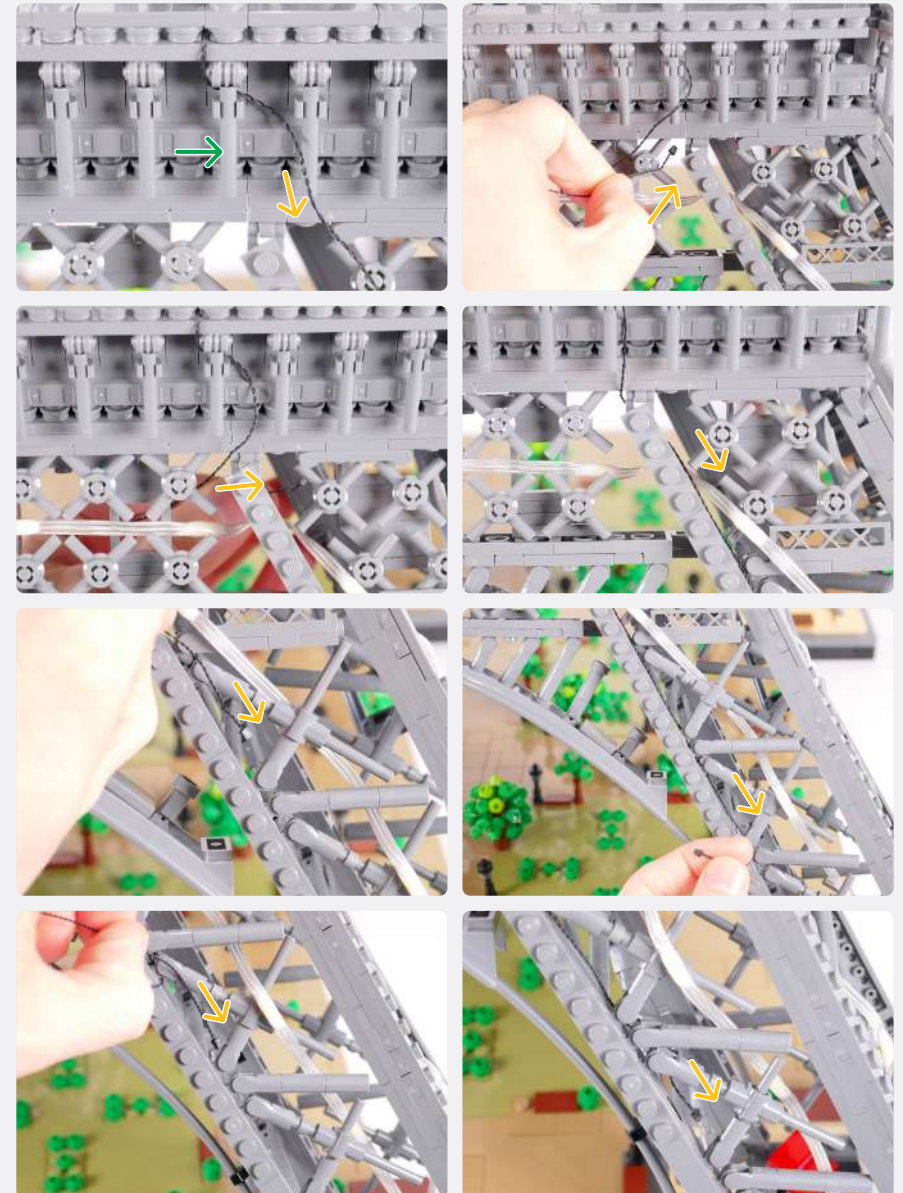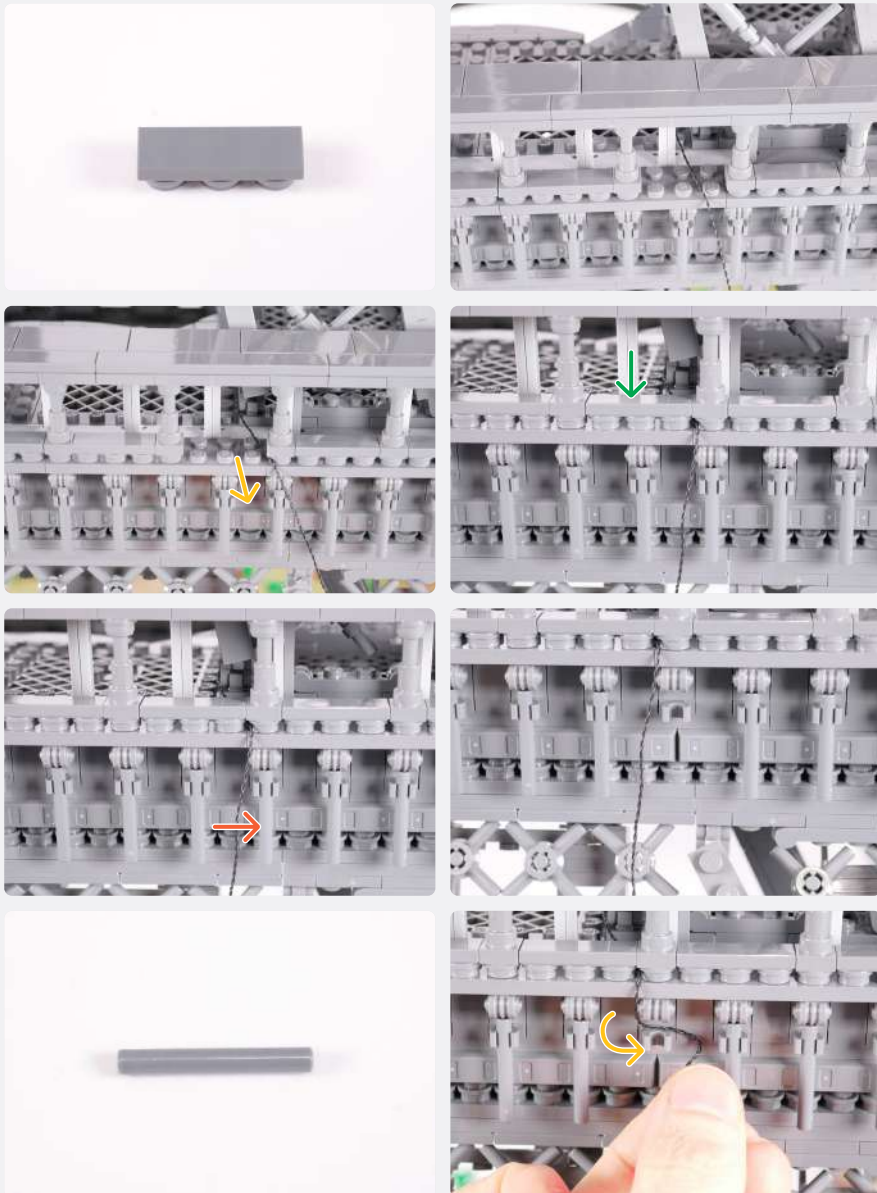

27





2-Port Expansion Board

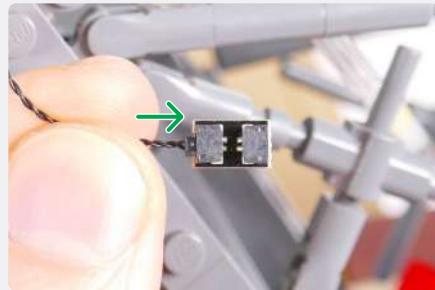

15cm Connecting Cable



Adhesive Square

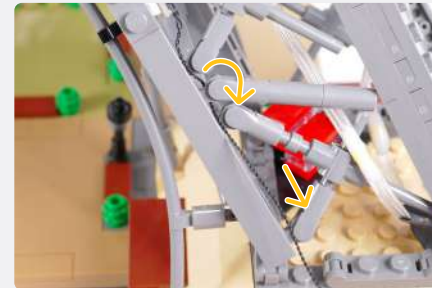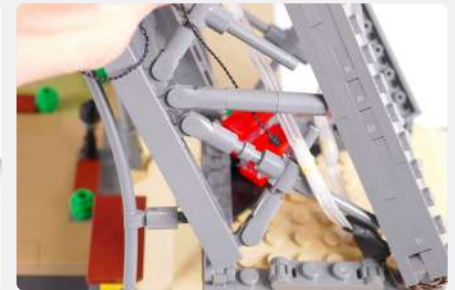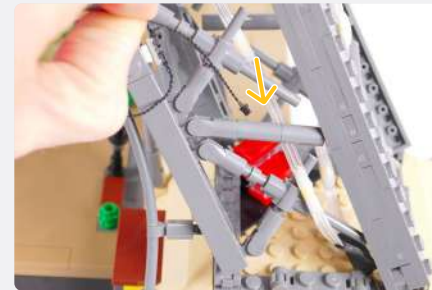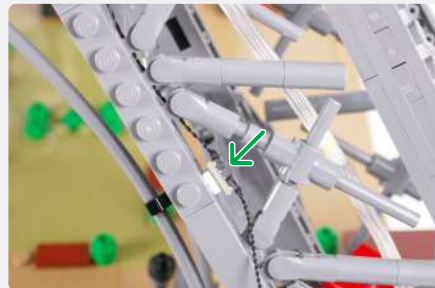


28




NOTE

Take the USB Power Cable plus IR Switch Board from Step 16.

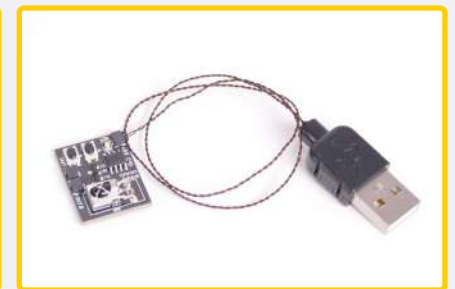


NOTE

Connect the loose 15cm Connecting Cable into the "OUT A" Port of the IR Control Board.

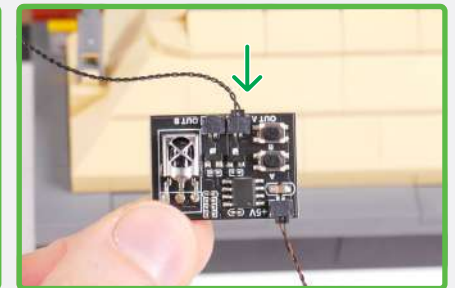

NOTE

Leave the IR Switch Board plus USB Power Cable sitting in this area until later on.

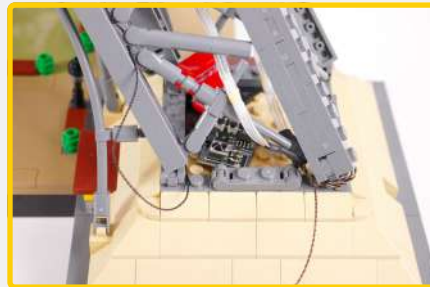


NOTE

To test and use the light kit, it is recommended to use an LMB Power Adapter to plug in the two USB Power Cables coming from the set.




NOTE

To extend the USB Power Cables, plug them into two USB Extension Cables and then to the Power Adapter.

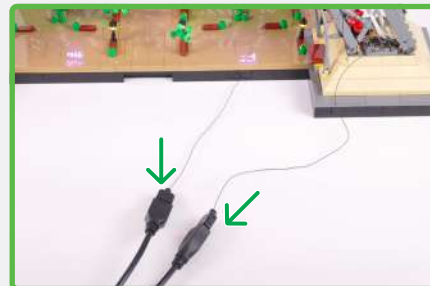

NOTE



Connect to a 5V USB Wall Adaptor (sold separately). A power bank or battery pack is not recommended to power this set.

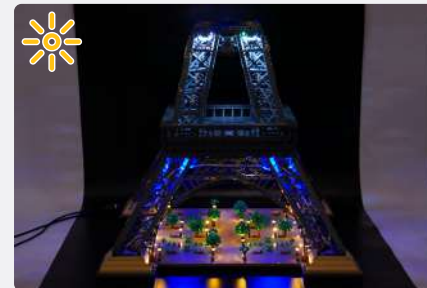







! If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section. **i**




29

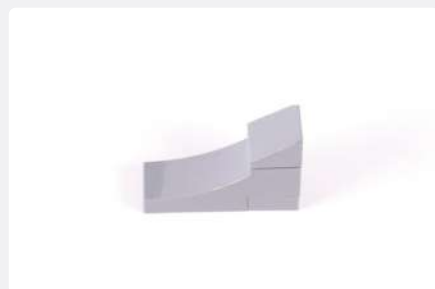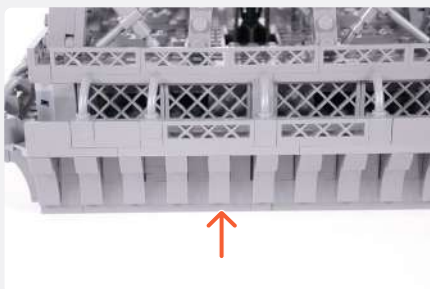


30




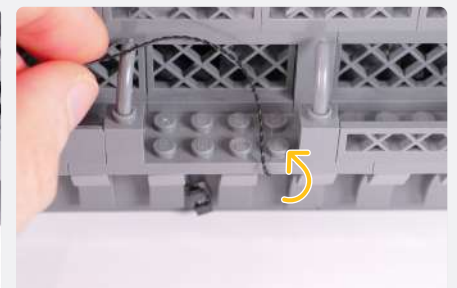
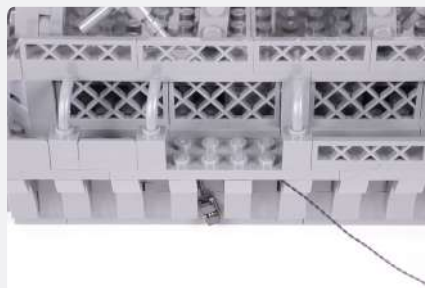
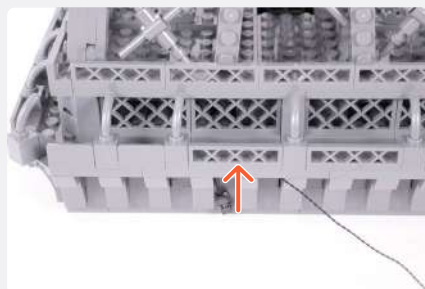
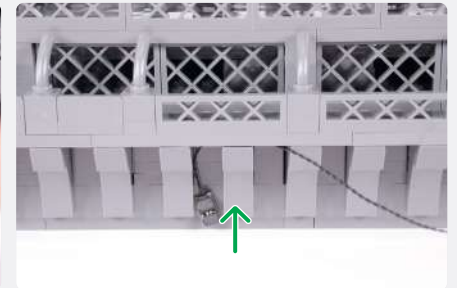
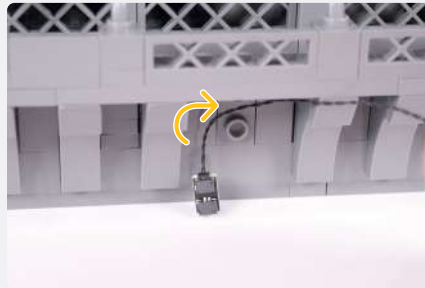
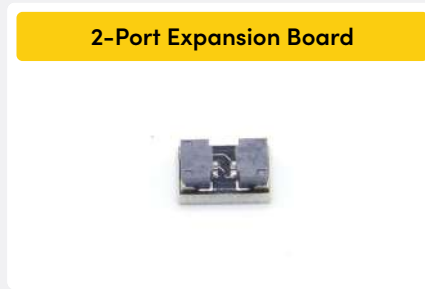


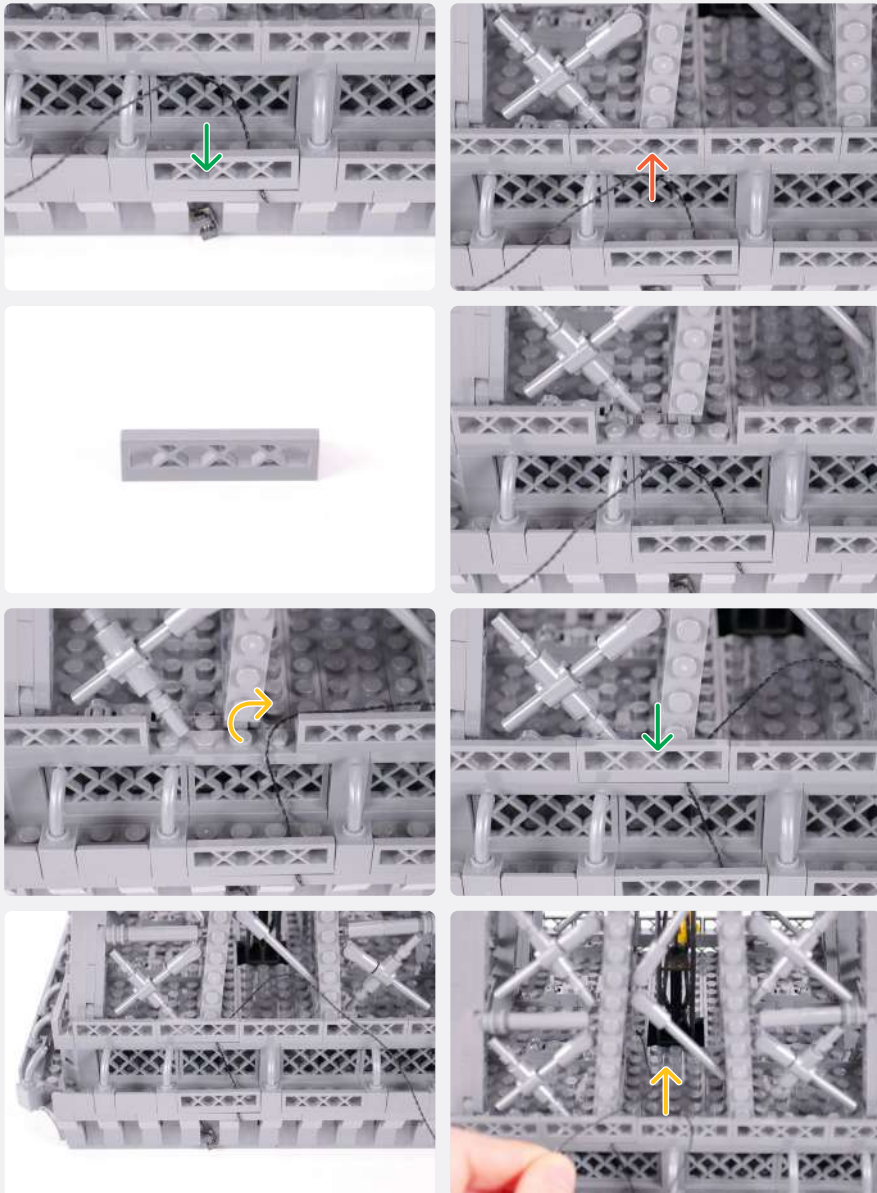

31

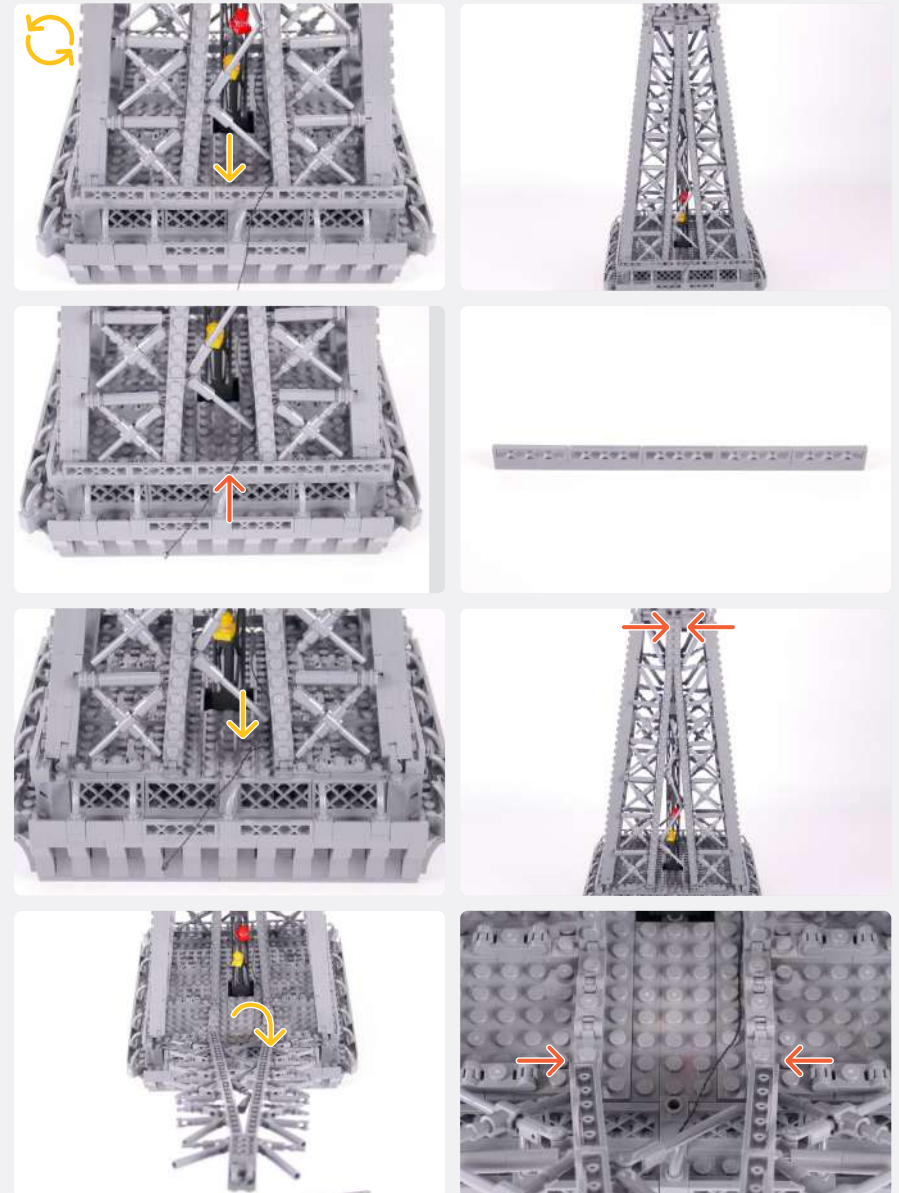

32

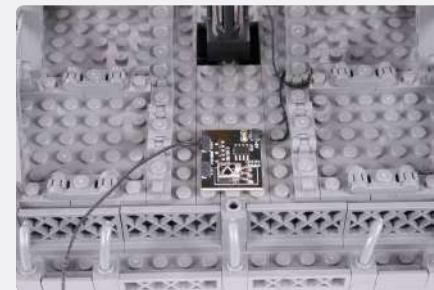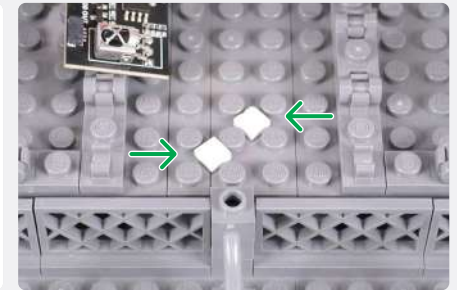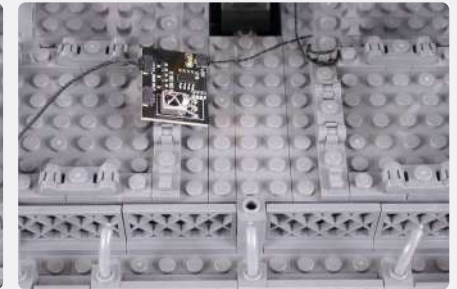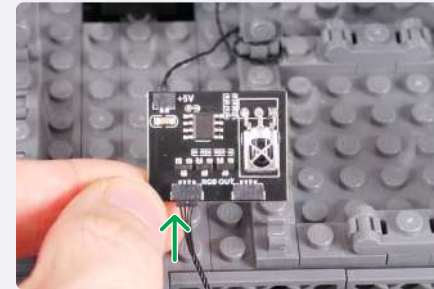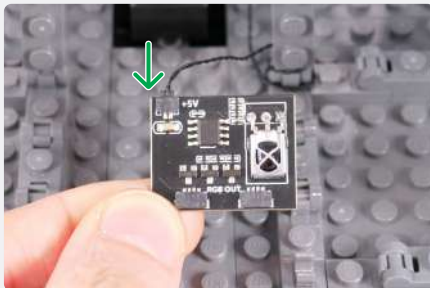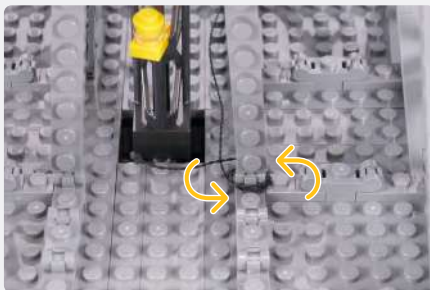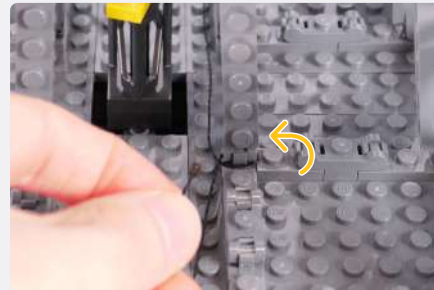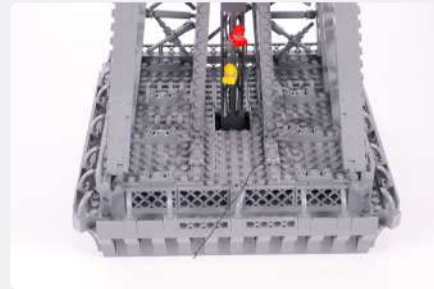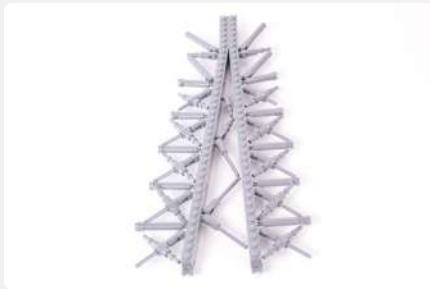

33

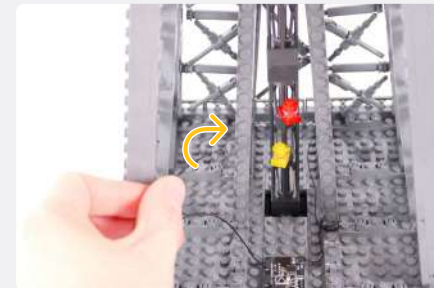





Plate 1x6 - Black







RGB Strip Light 2.0




RGB 15cm Connecting Cable

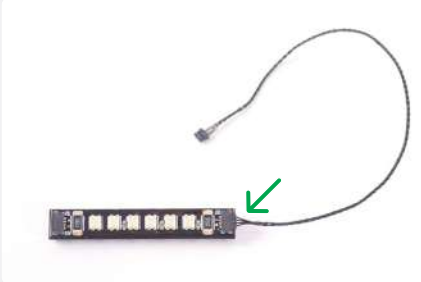

34

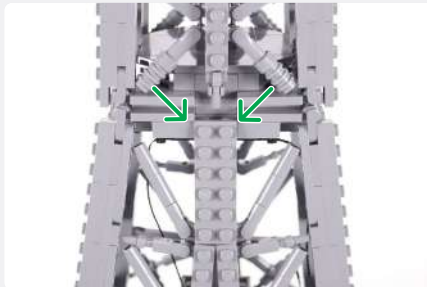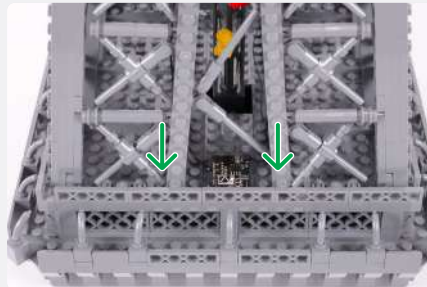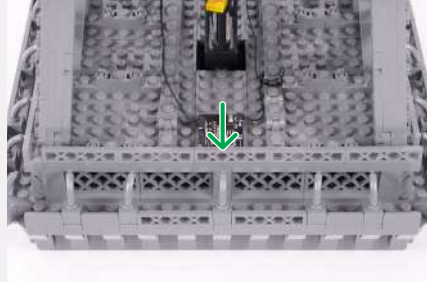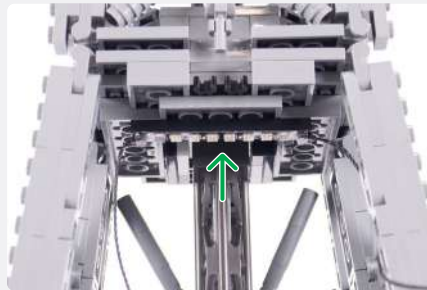

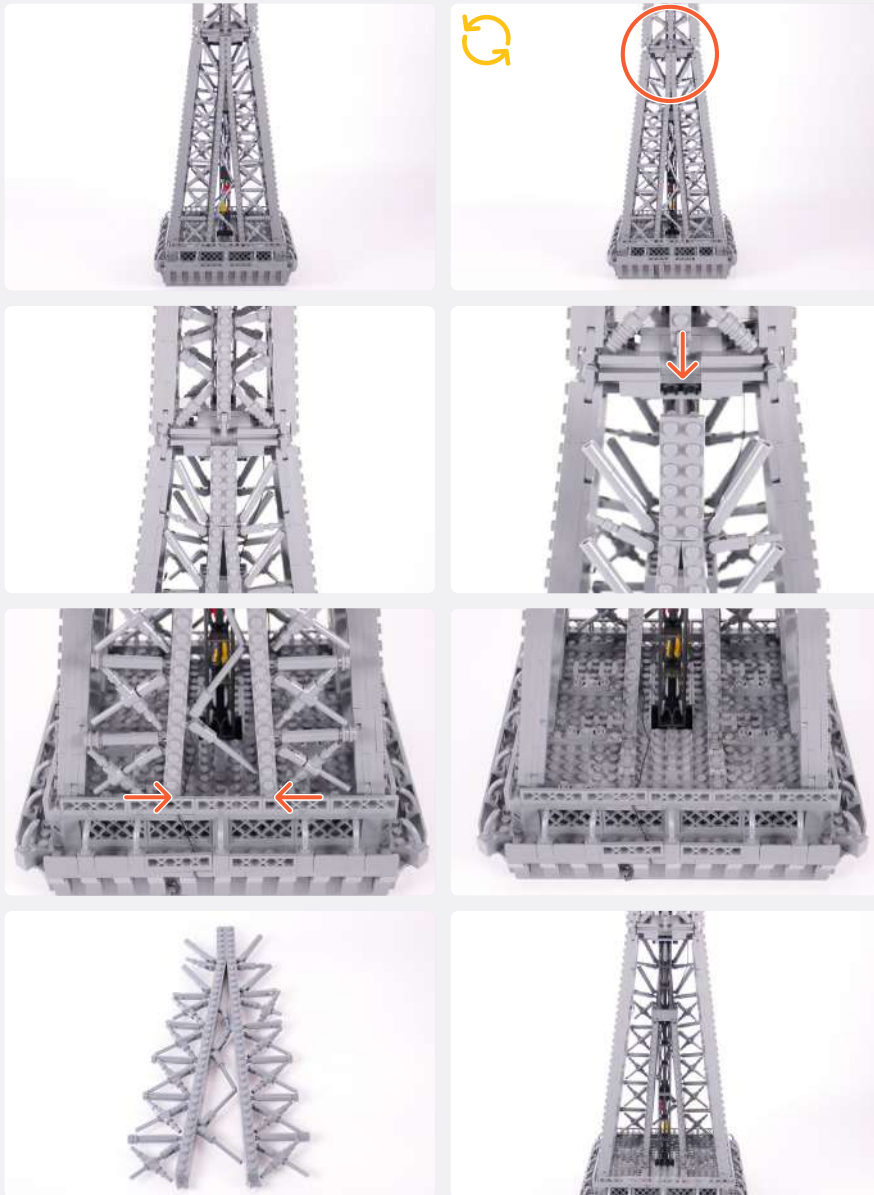

35





Plate 1x6 - Black





RGB Strip Light 2.0





RGB 30cm Connecting Cable

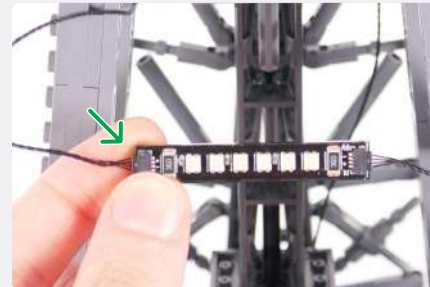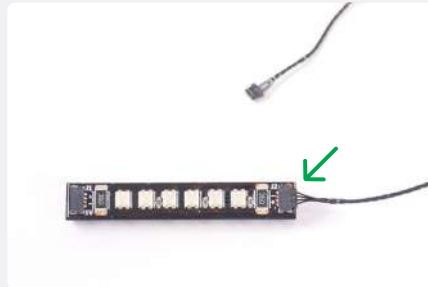

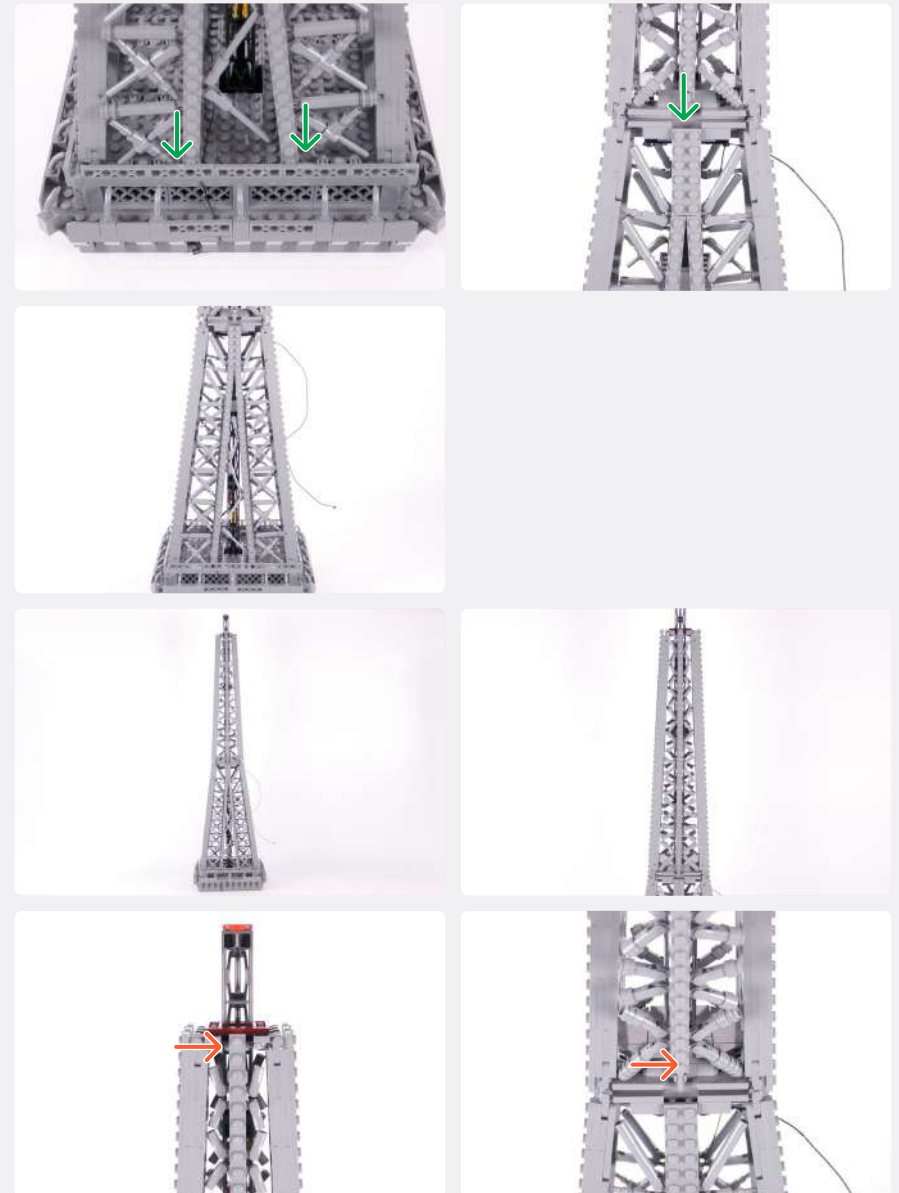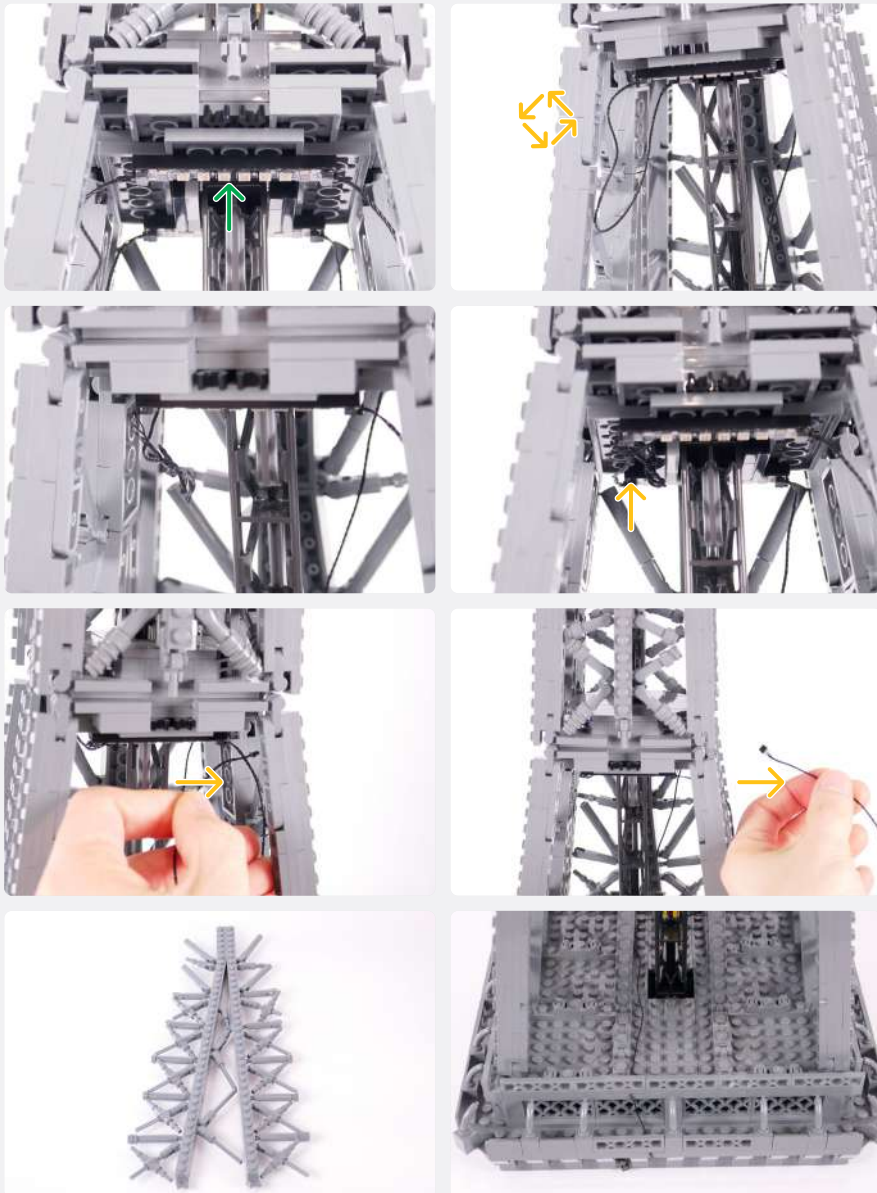


36

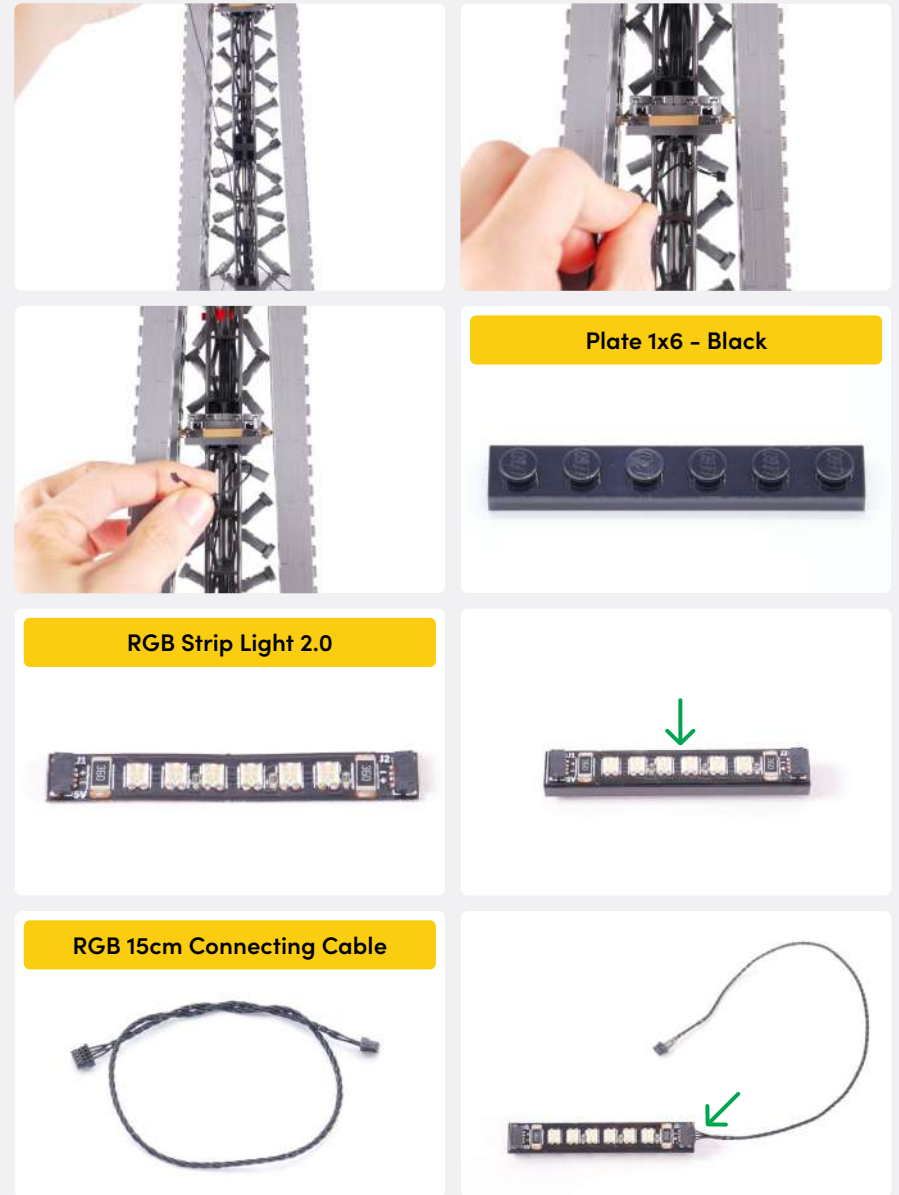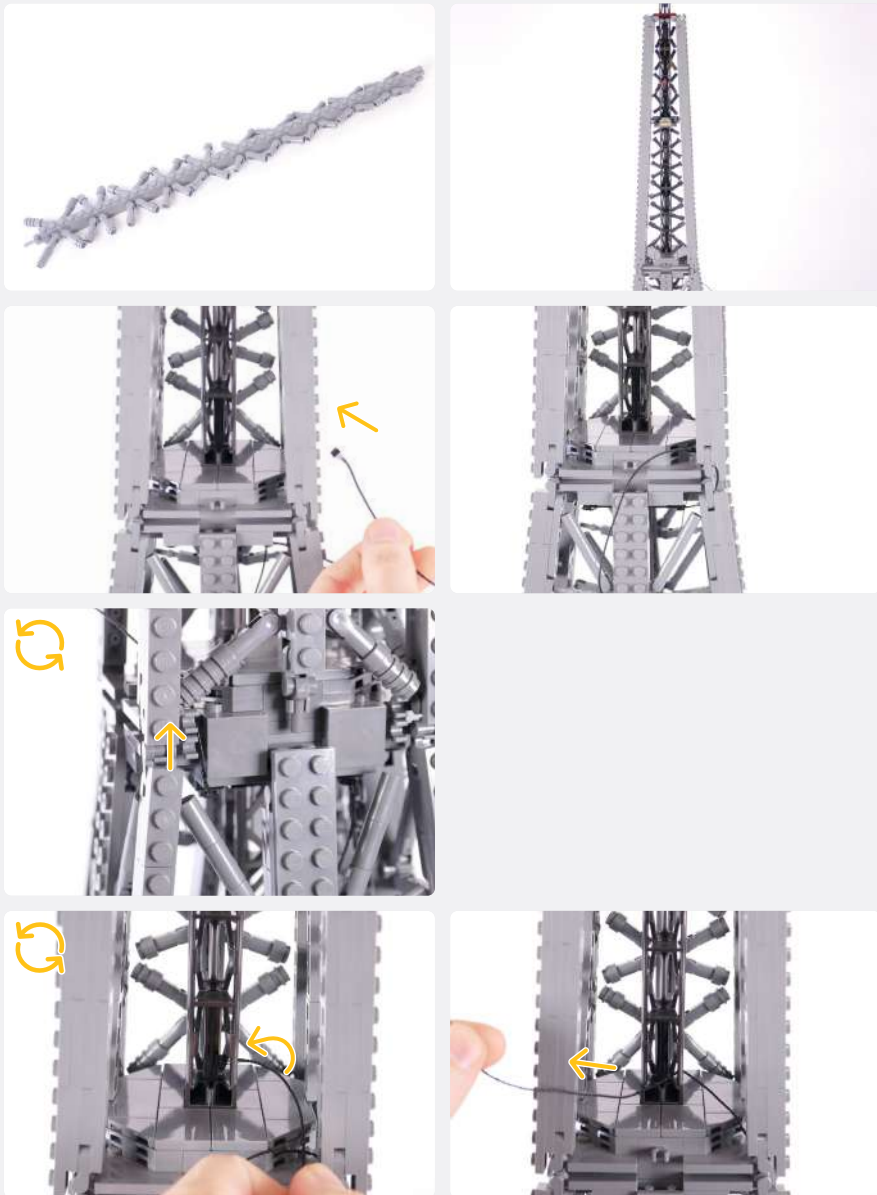


37






38

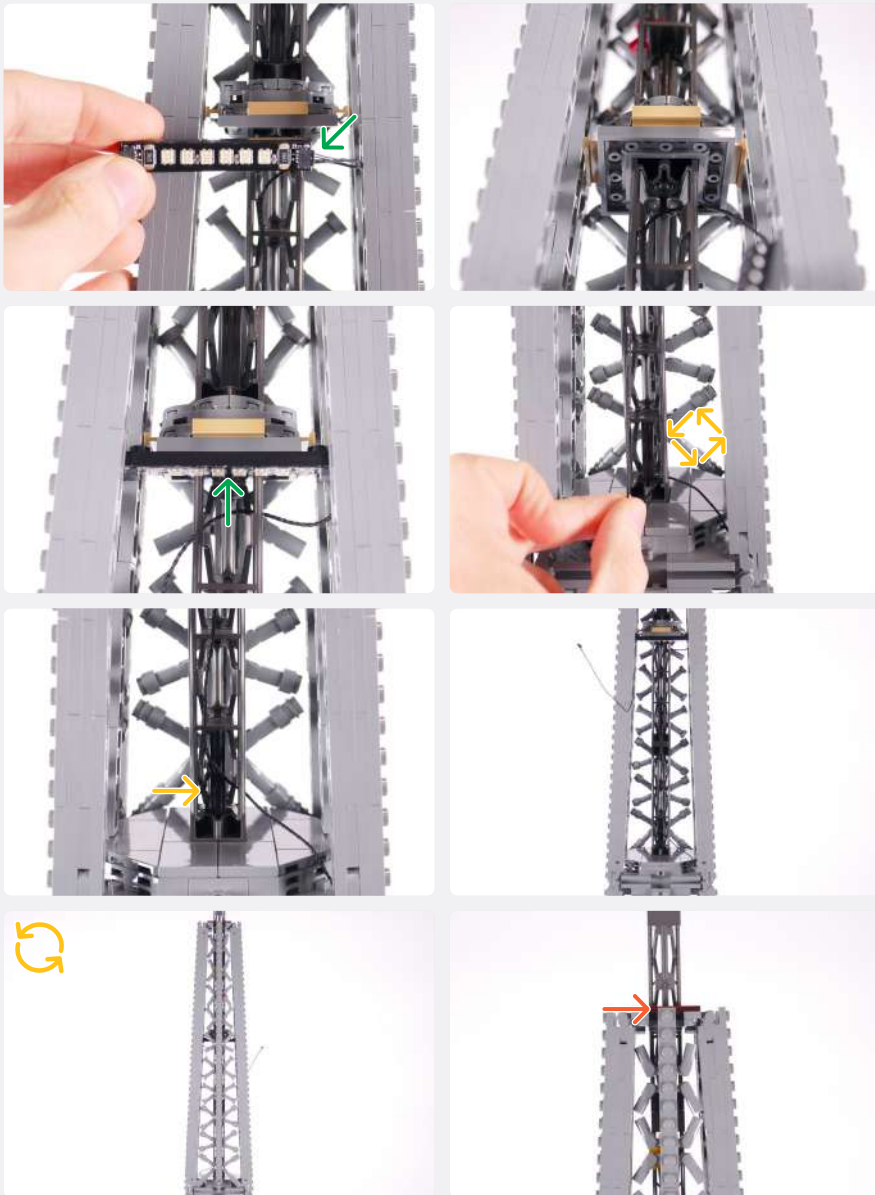


39

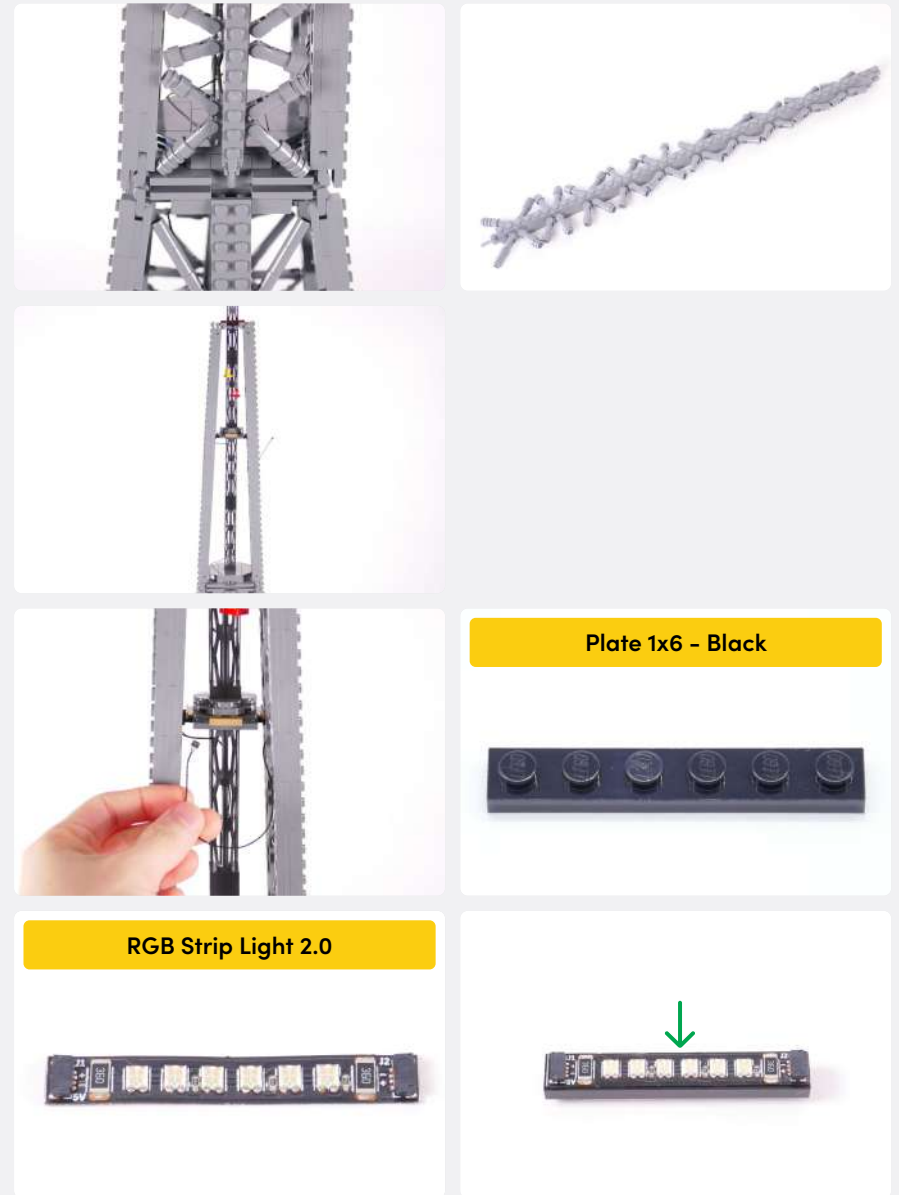

RGB 15cm Connecting Cable

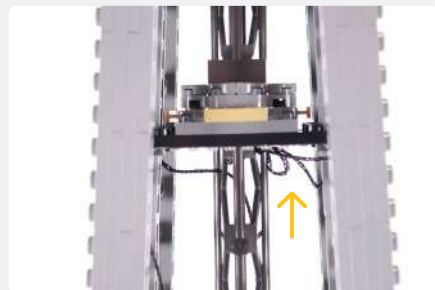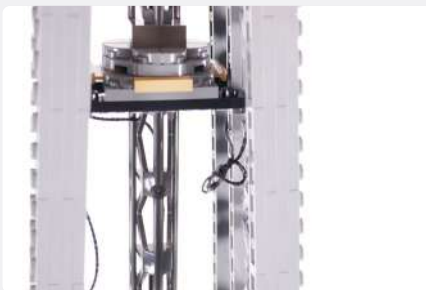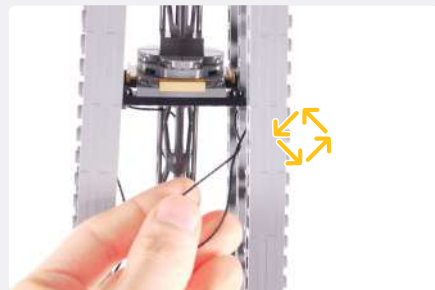
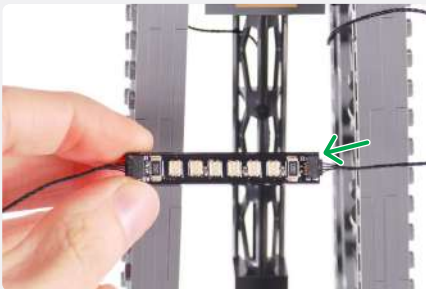
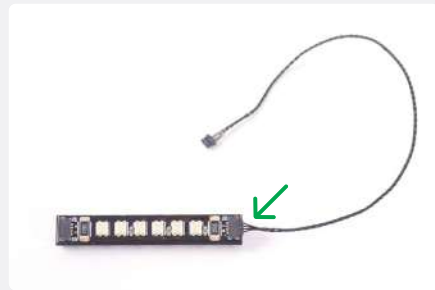


40

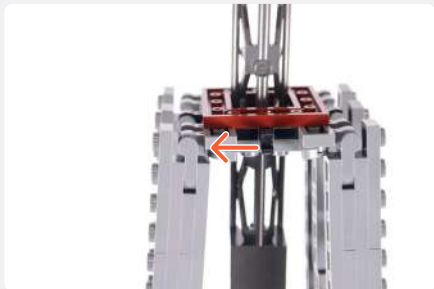


Plate, Round 1x1 with Open Stud - Black



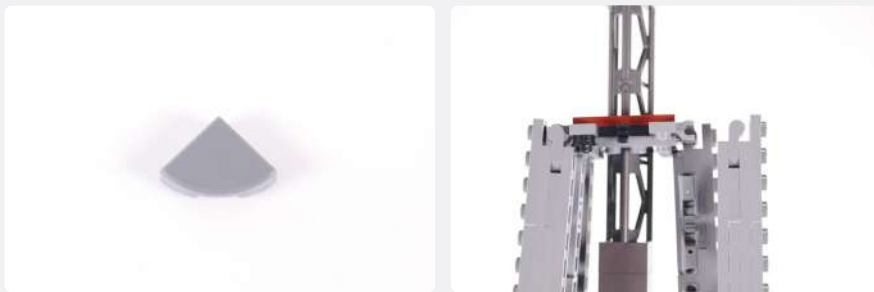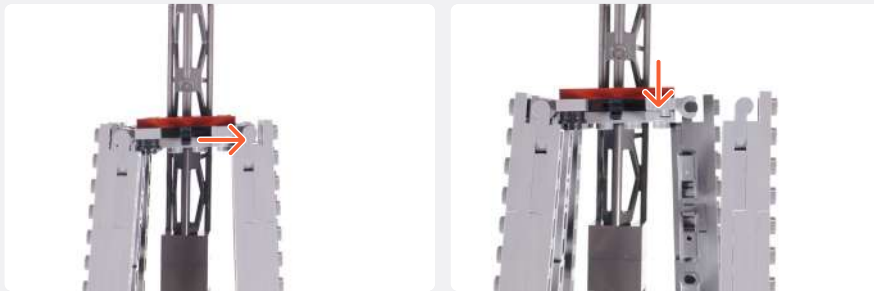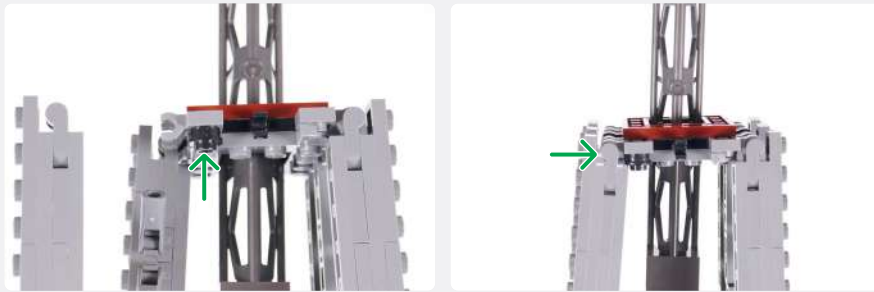

Plate, Round 1x1 with Open Stud
- Black

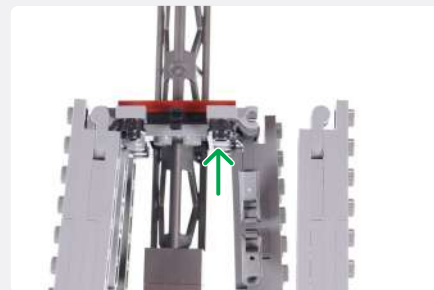


41



Plate, Round 1x1 with Open Stud
- Black




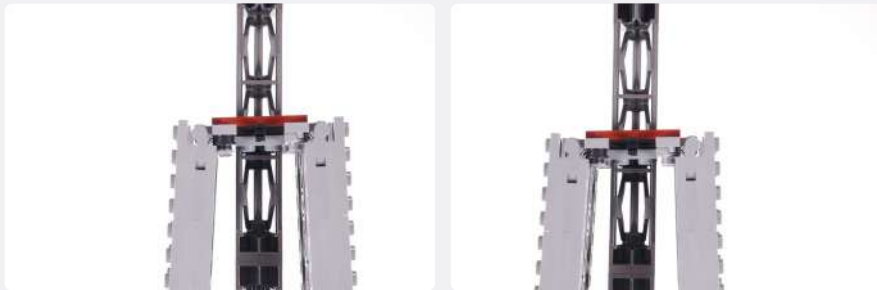


Plate, Round 1x1 with Open Stud - Black



42

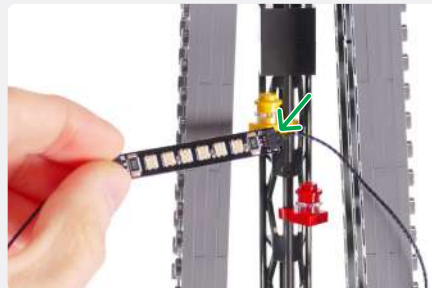




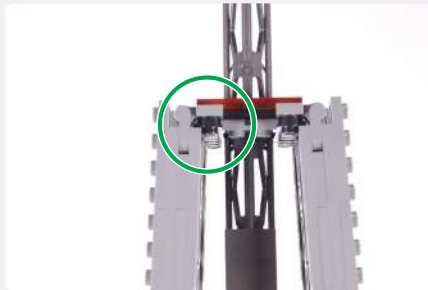




NOTE

Ensure the Strip Light is stuck in the position shown, with the ends lining up with the edge of the Round Plate.





43

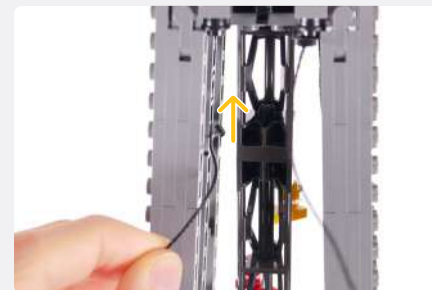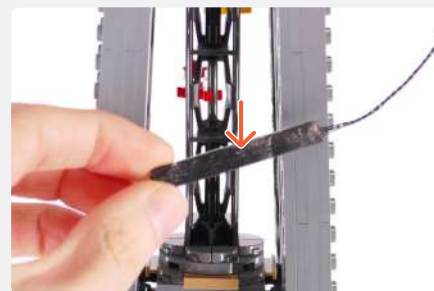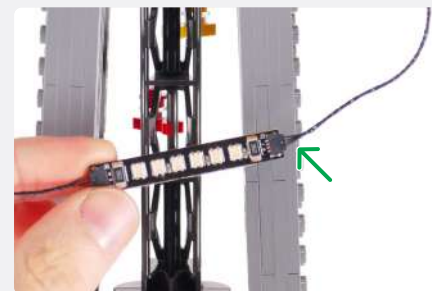
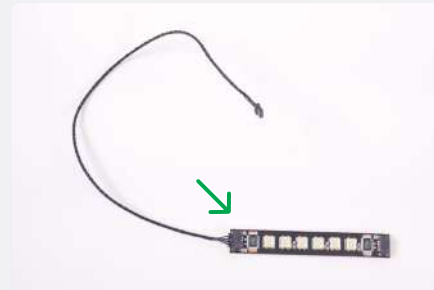


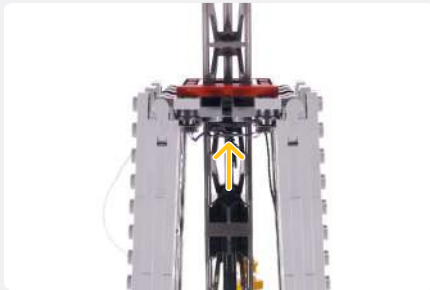
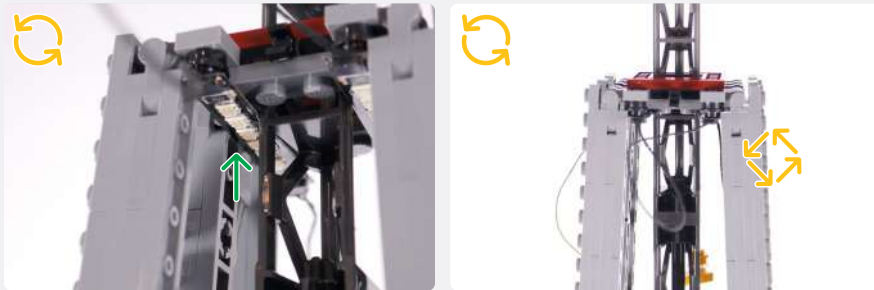


44

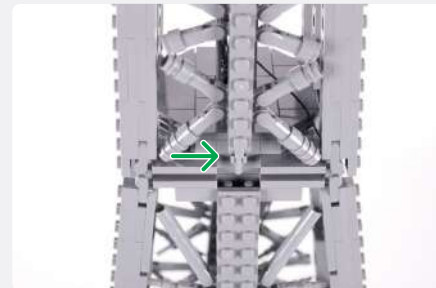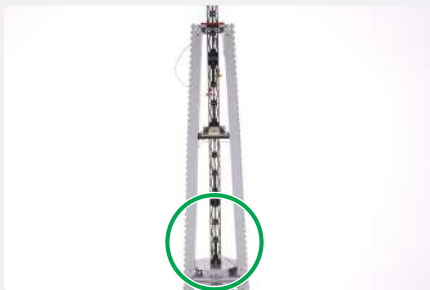


45

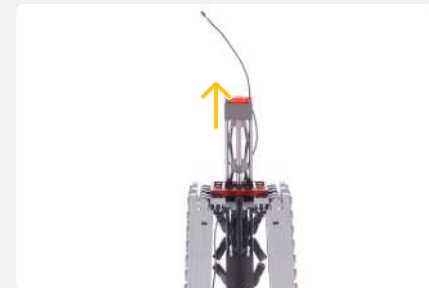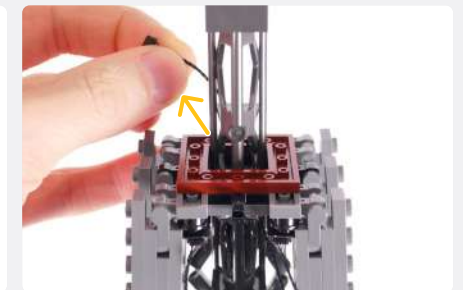


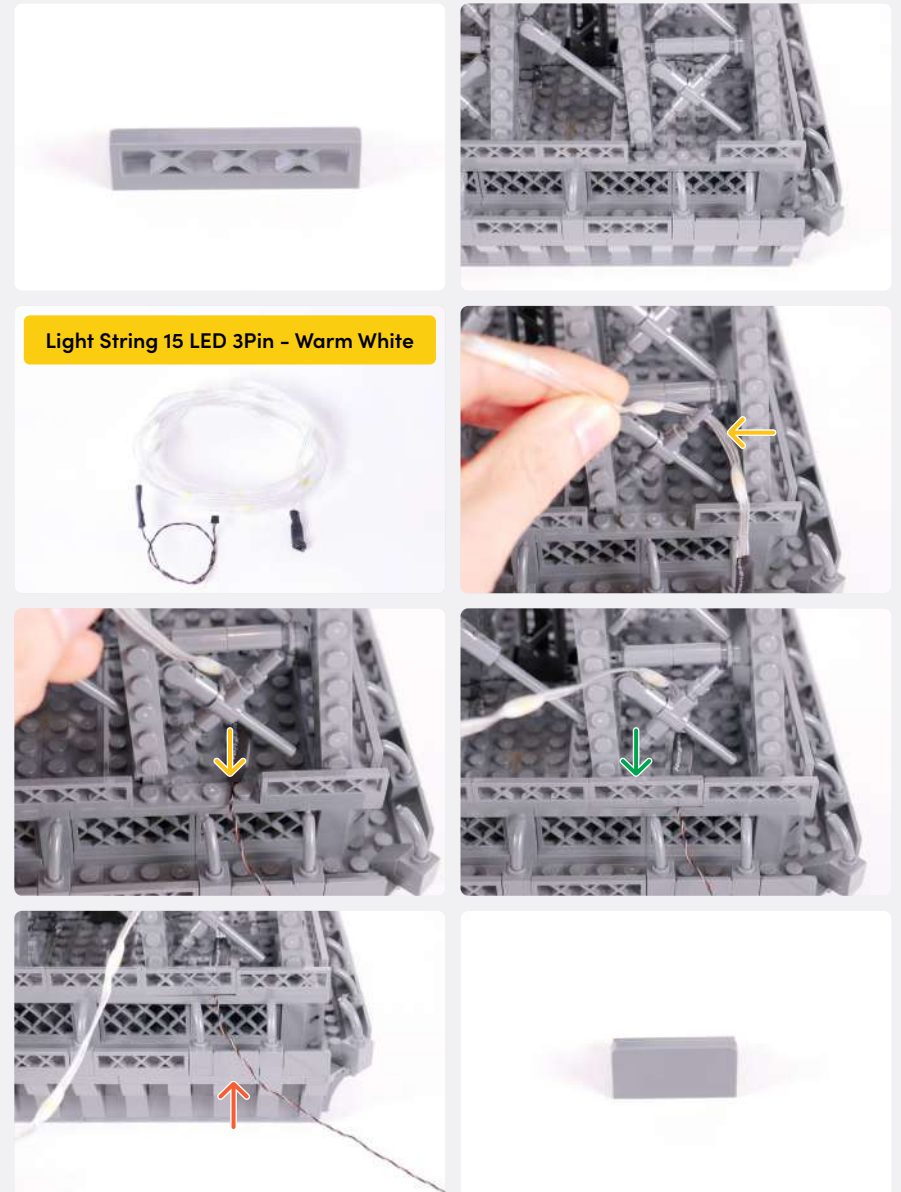
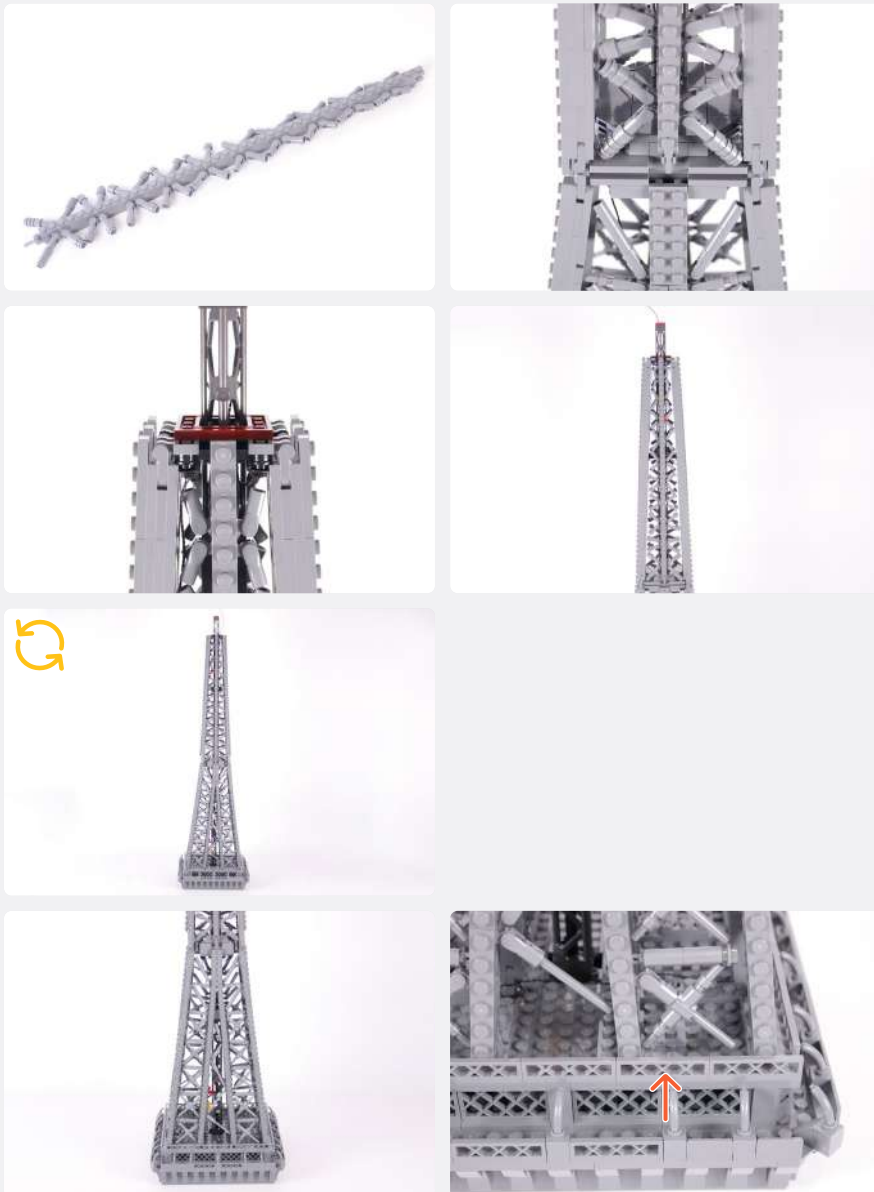


46







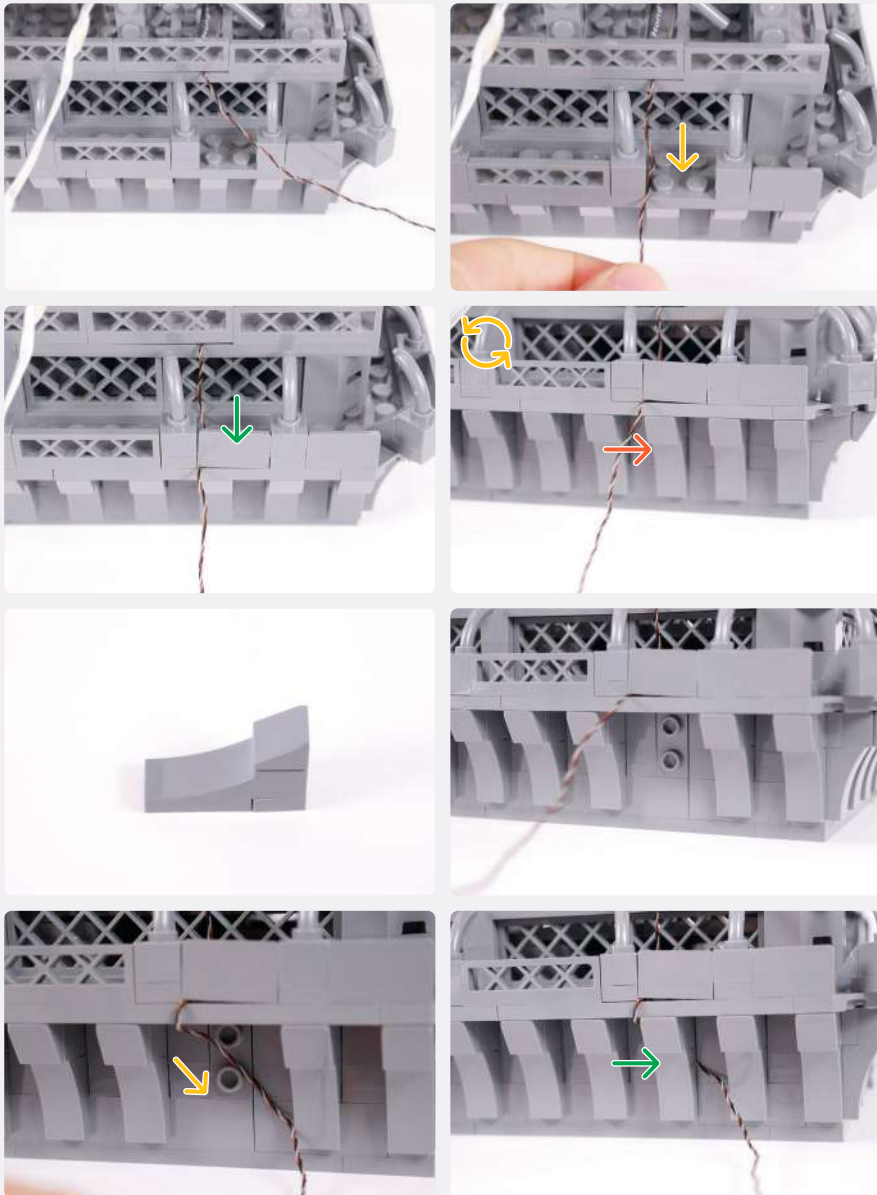


47

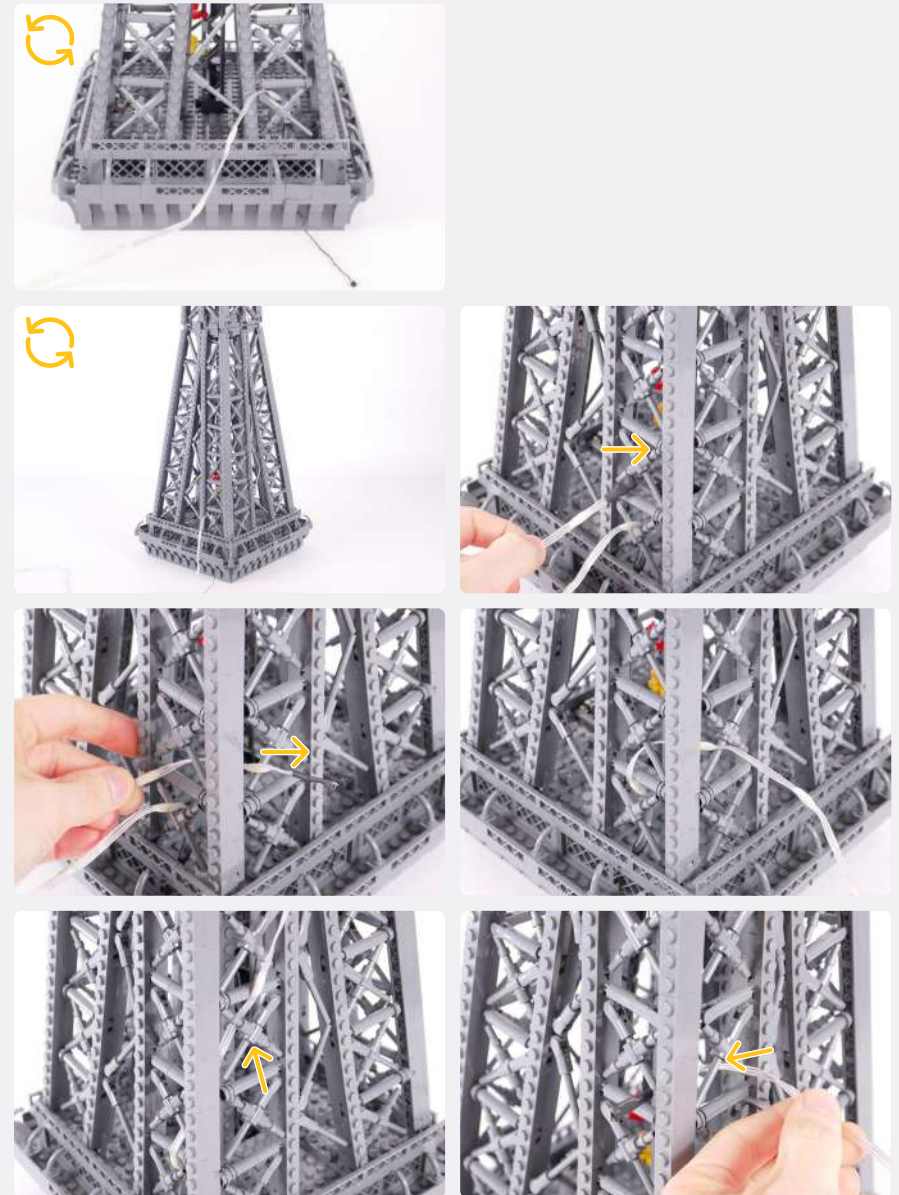


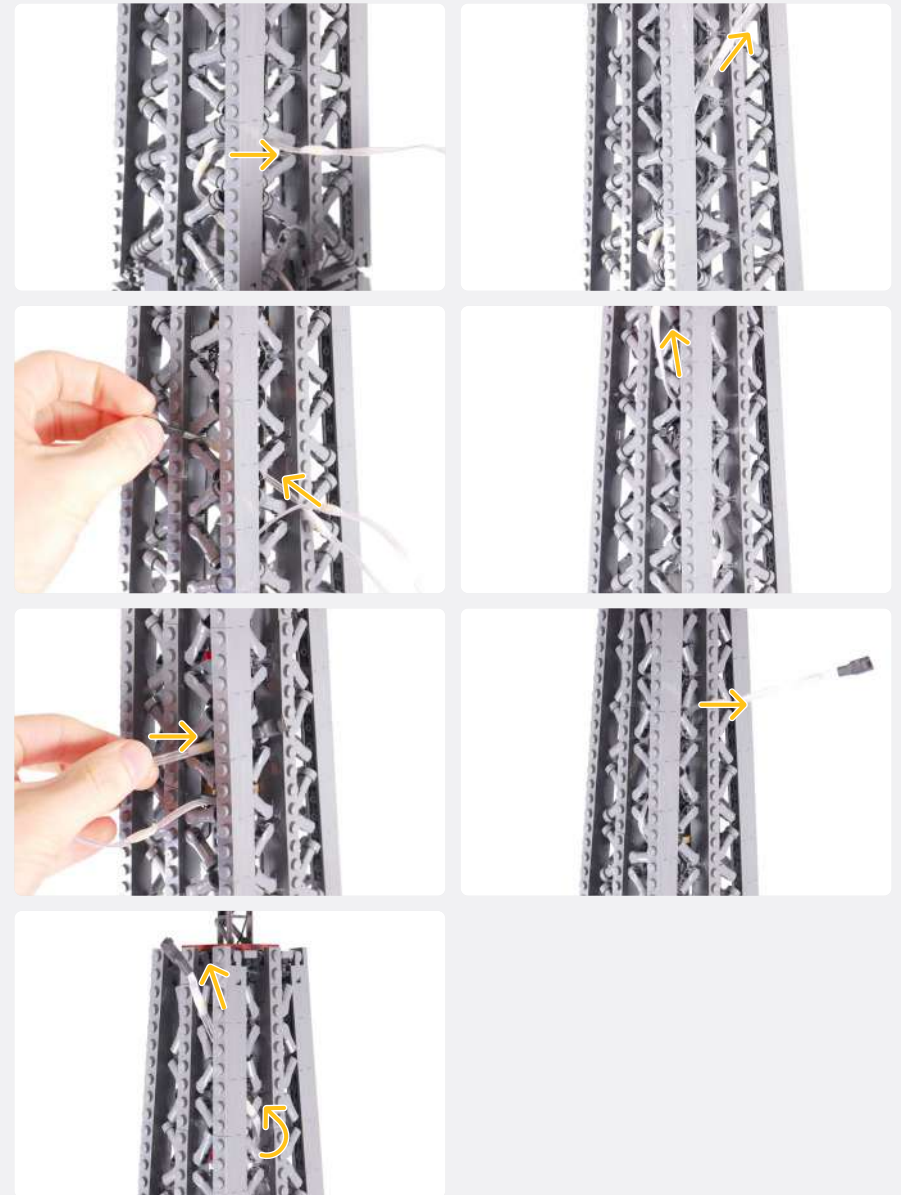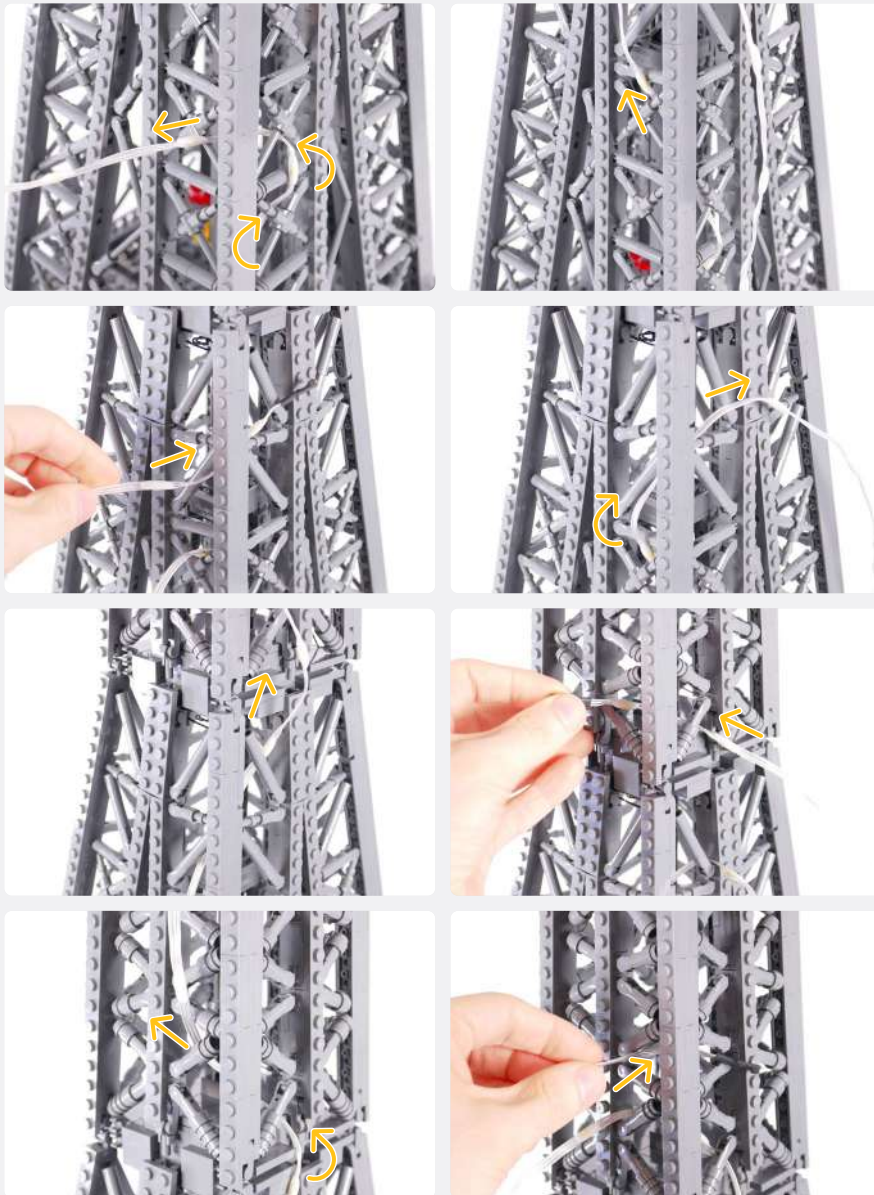


48

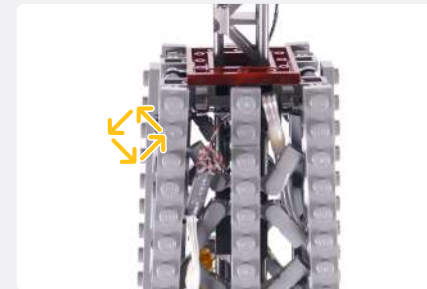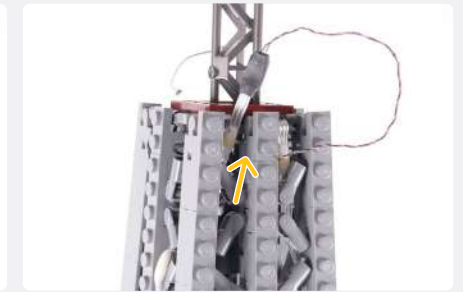
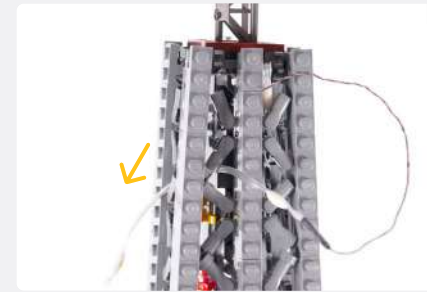
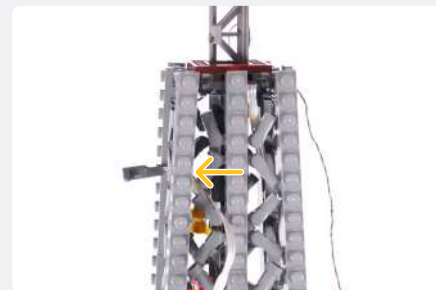
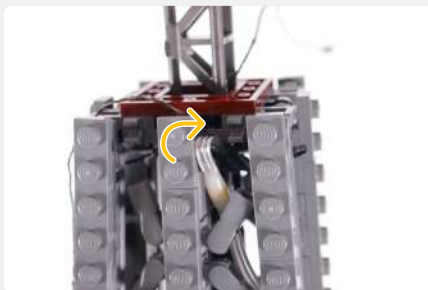
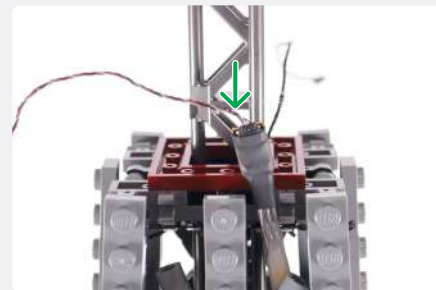
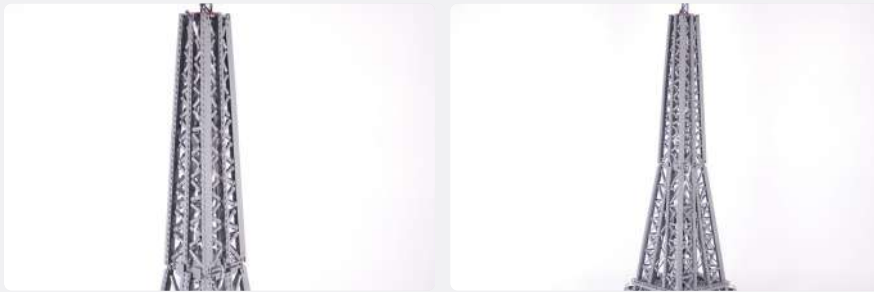


49

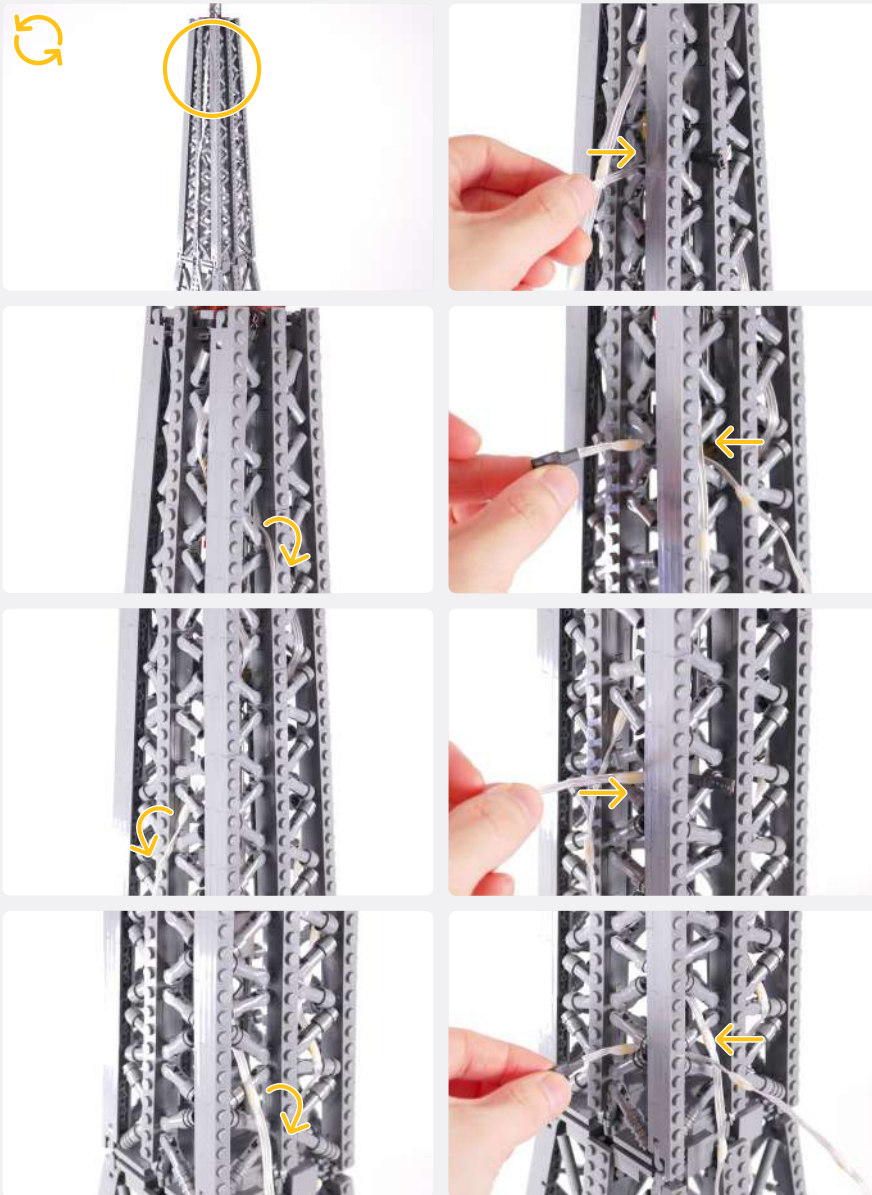

50


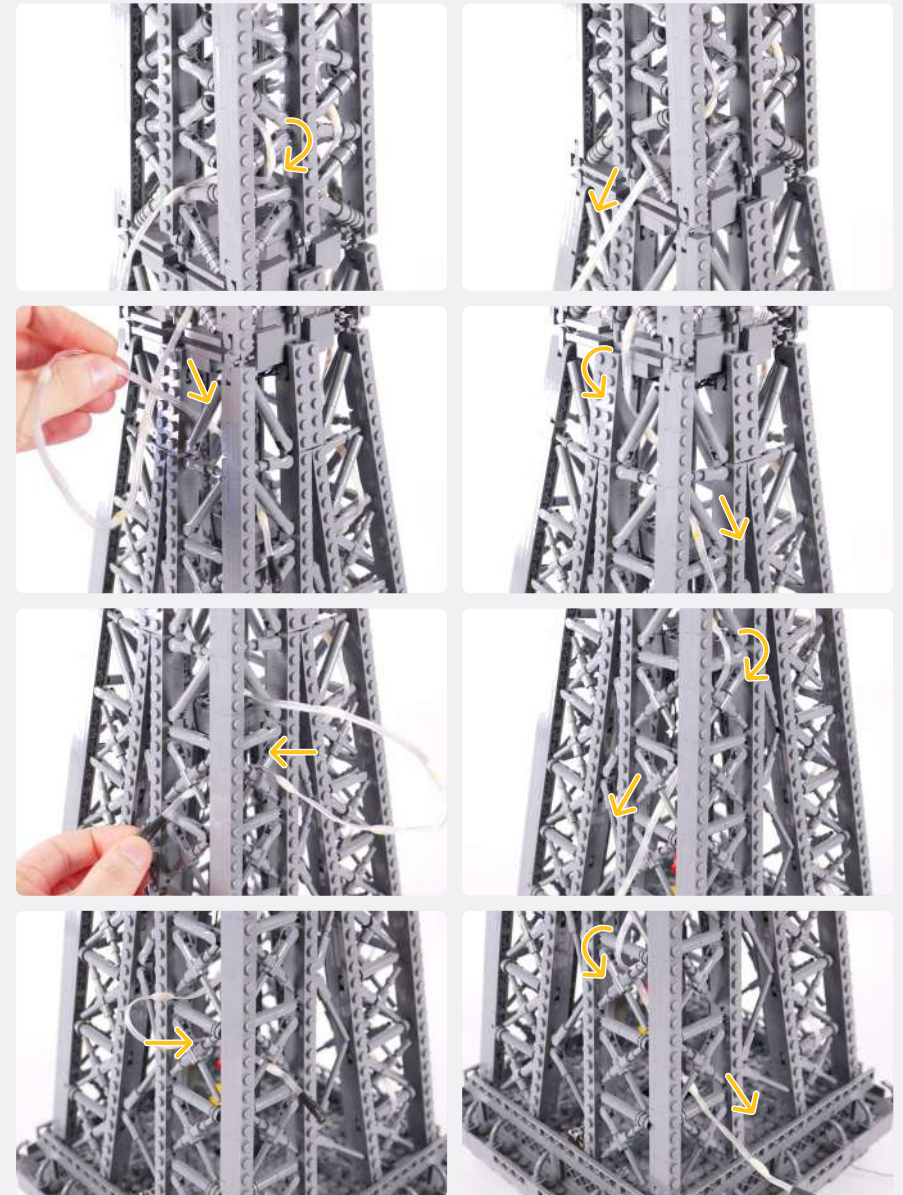


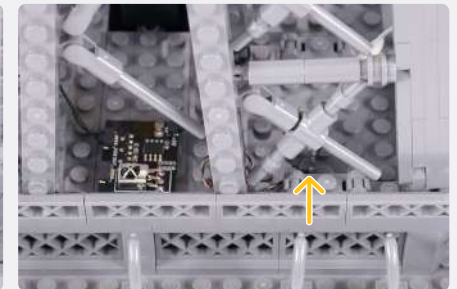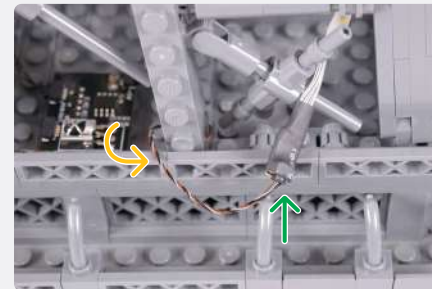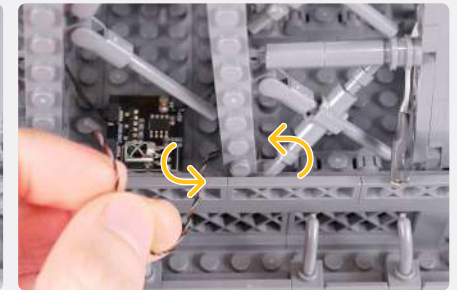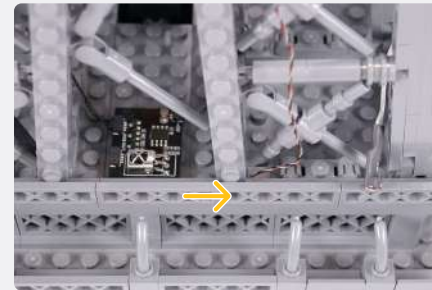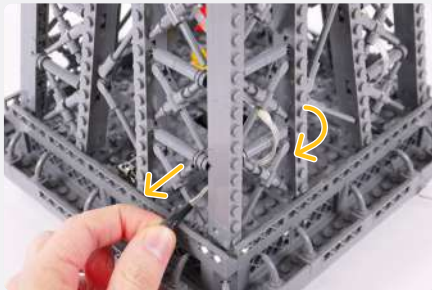



51














Light String 15 LED 3Pin - Warm White


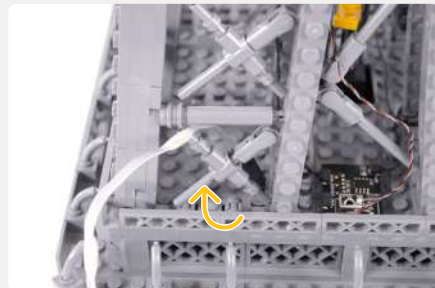
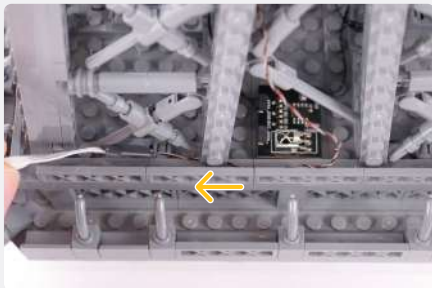


52




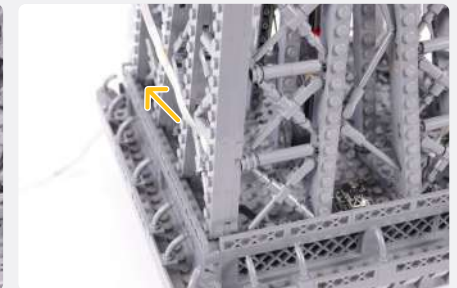
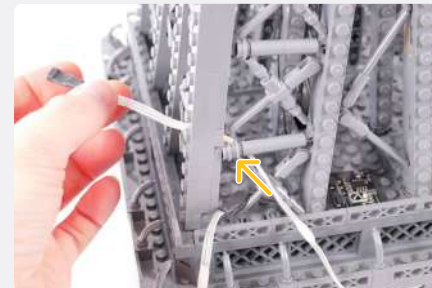


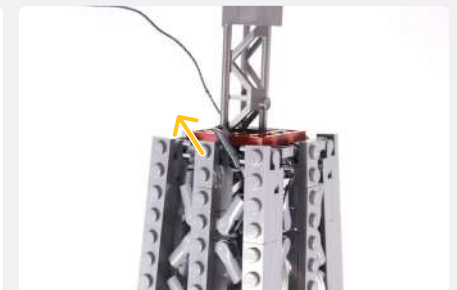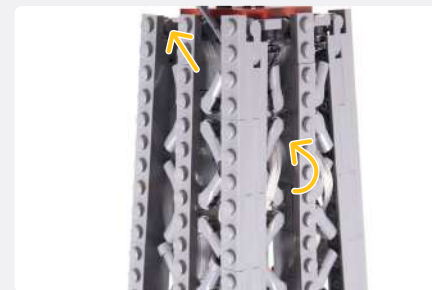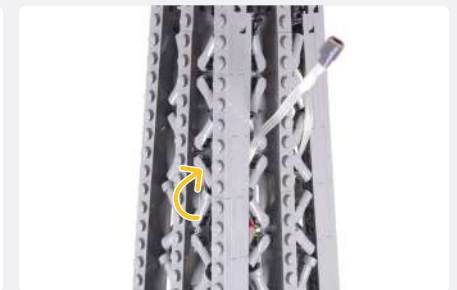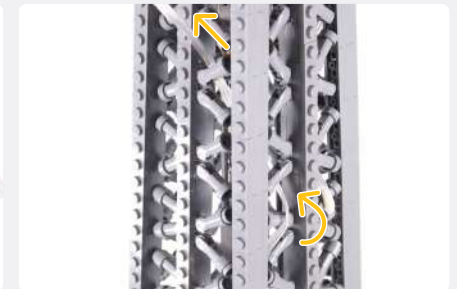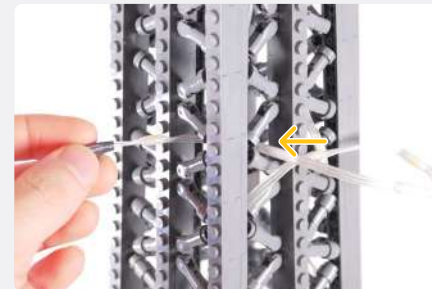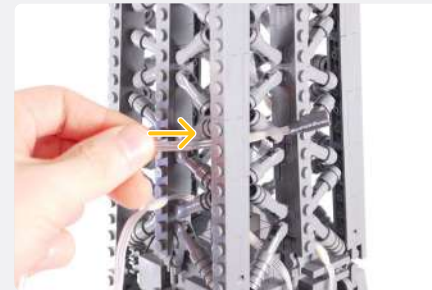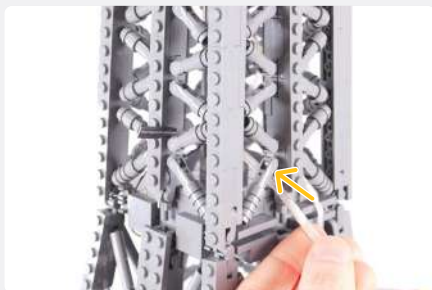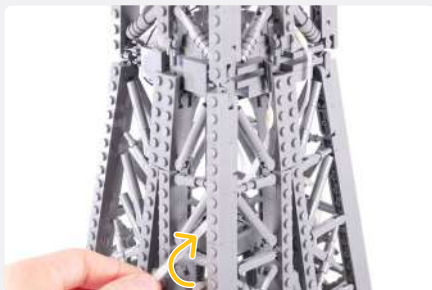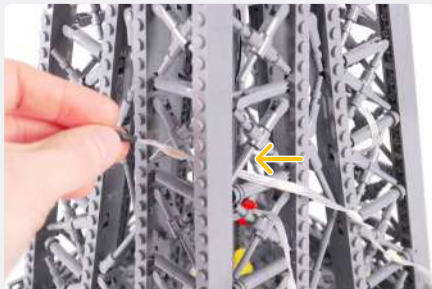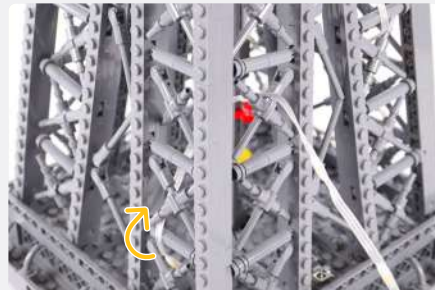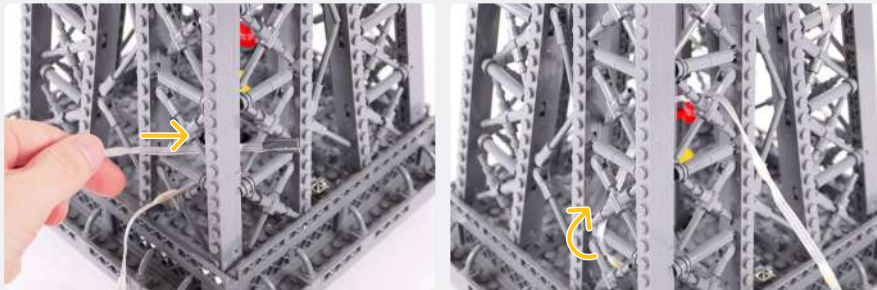


53

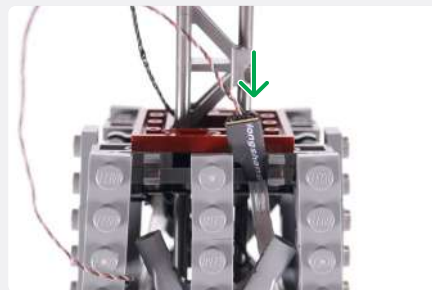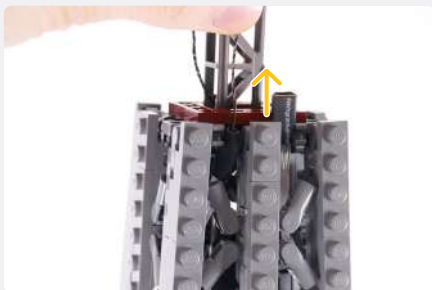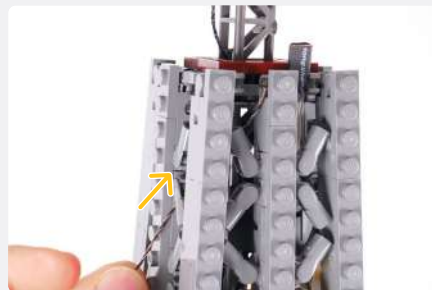



54

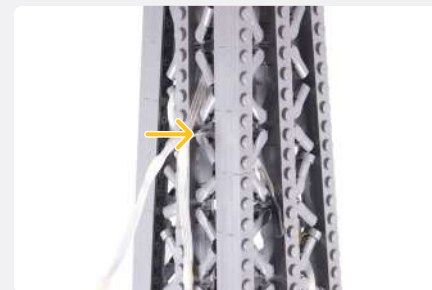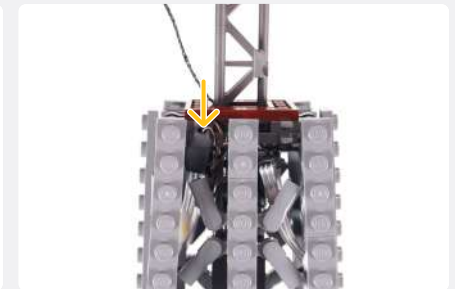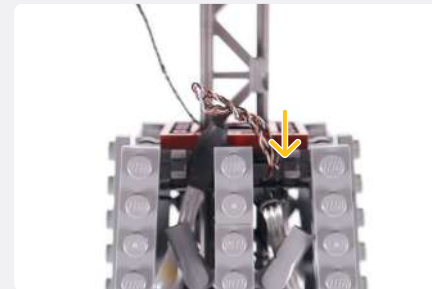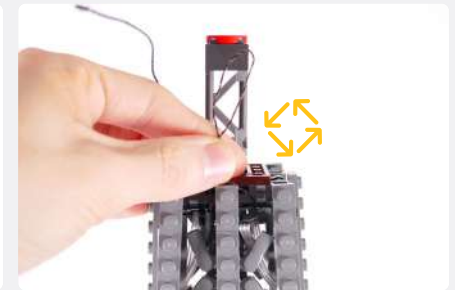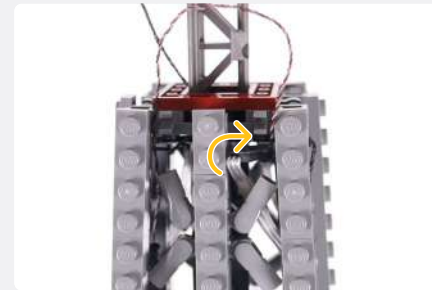

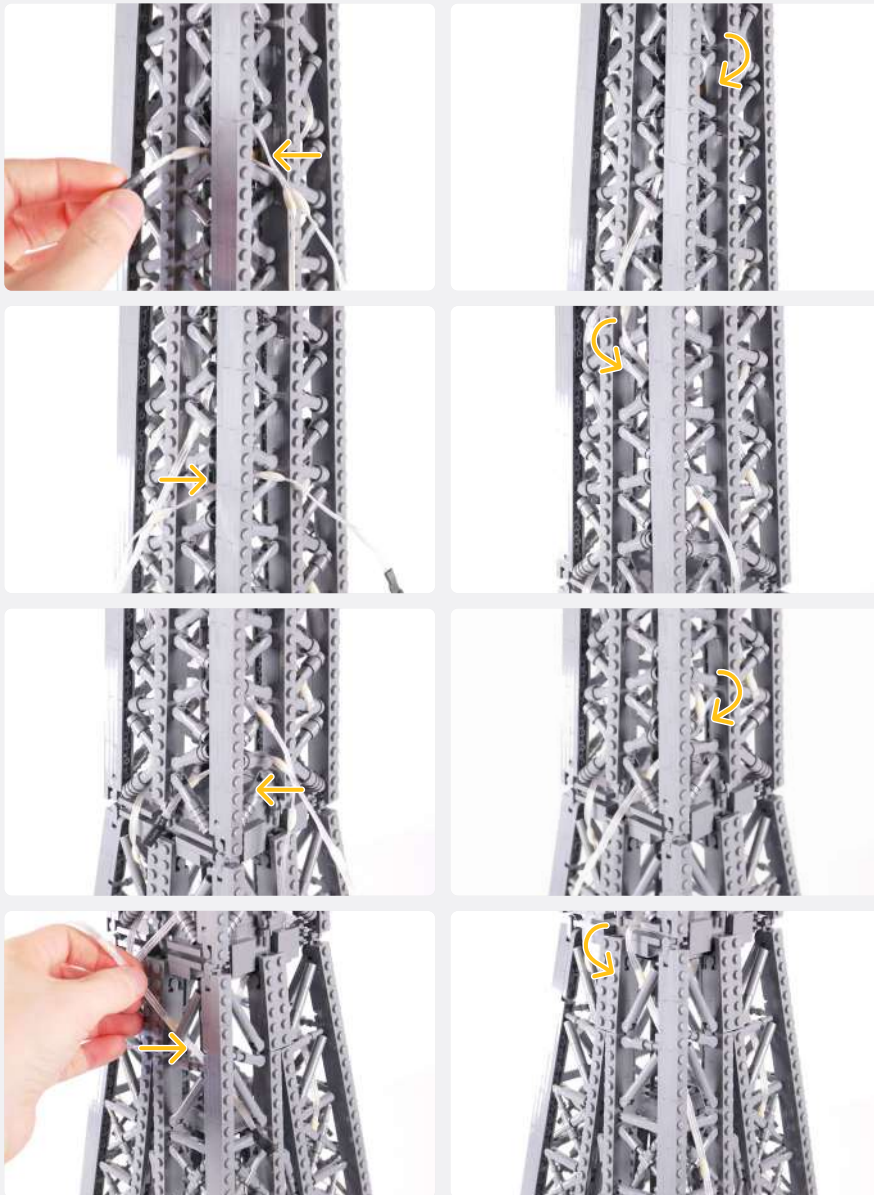


55





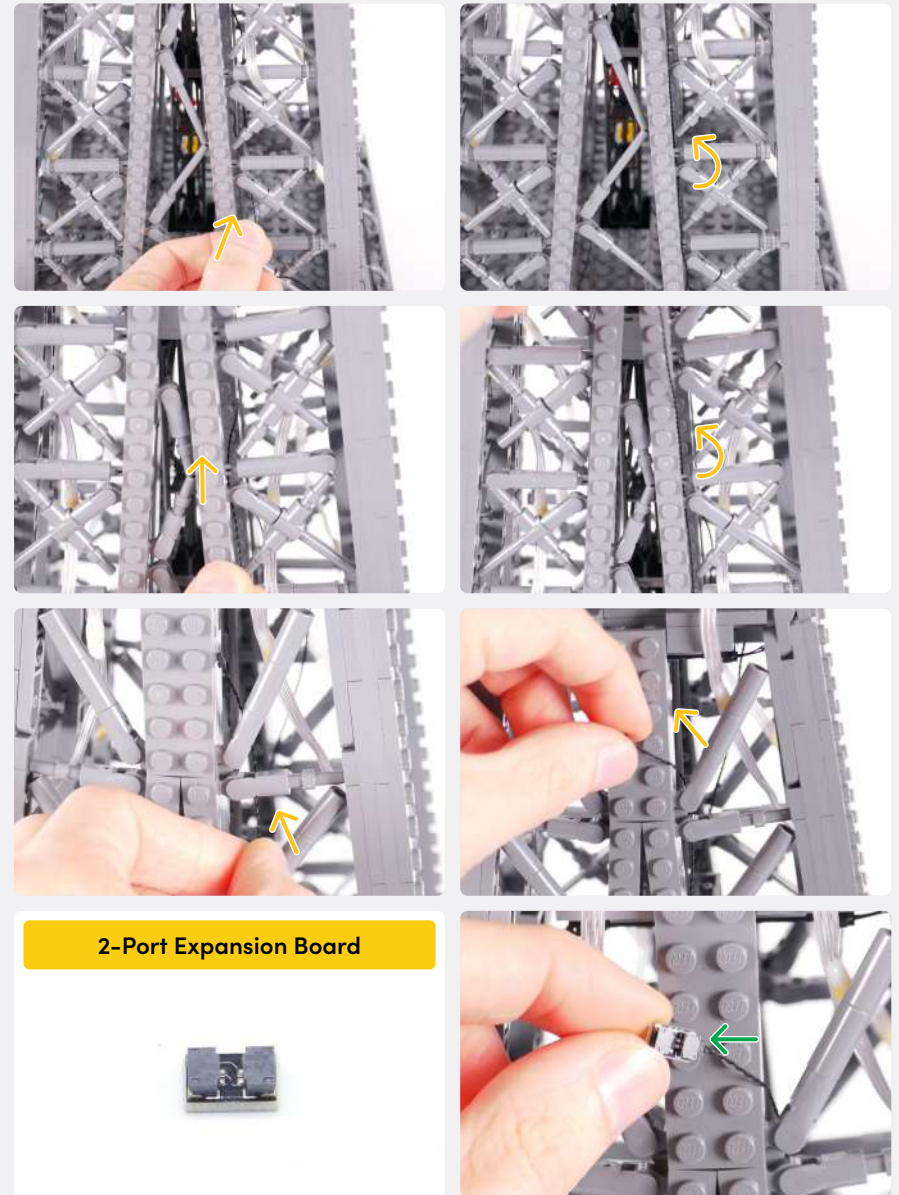
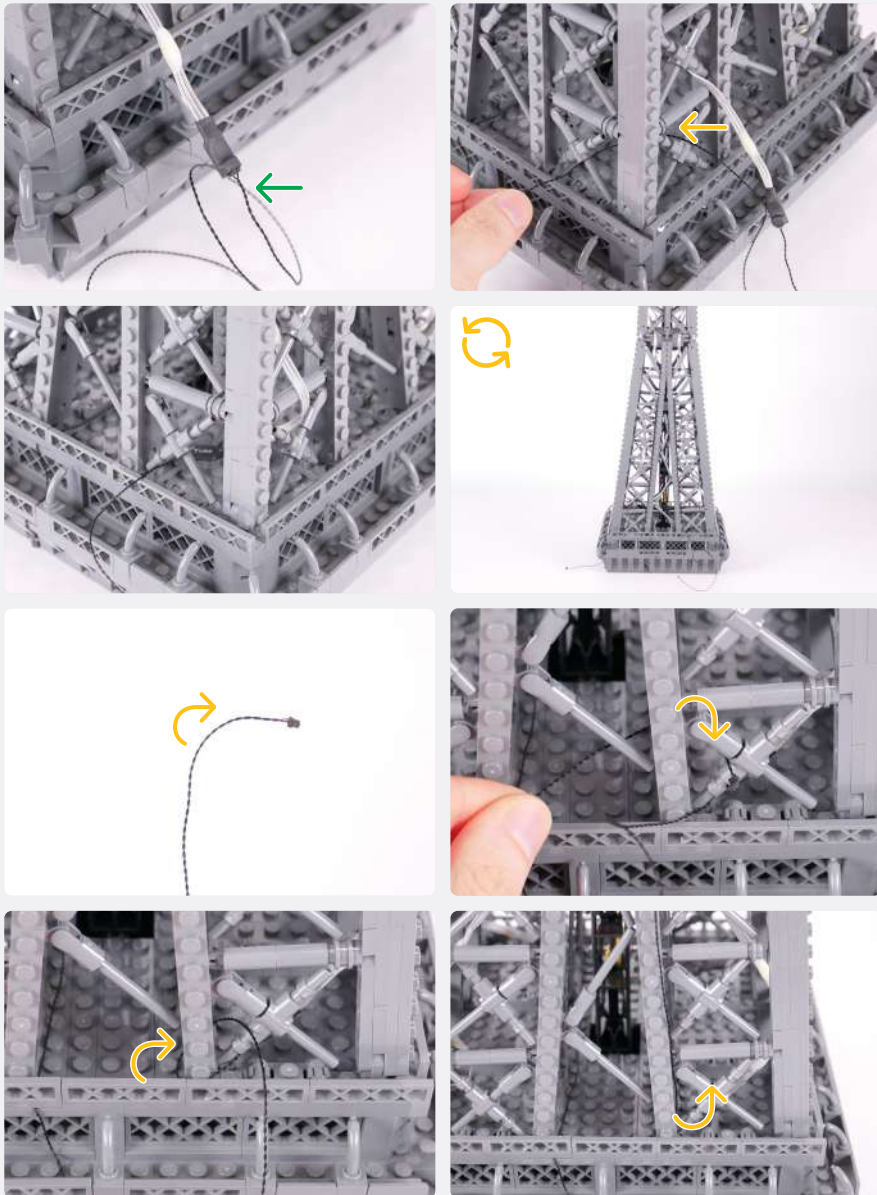


56






50cm Connecting Cable



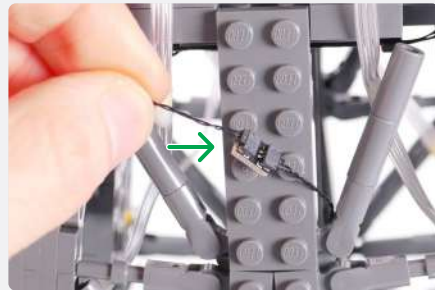



Adhesive Square

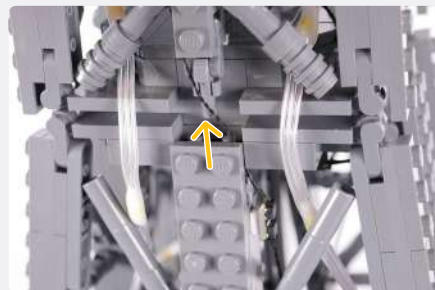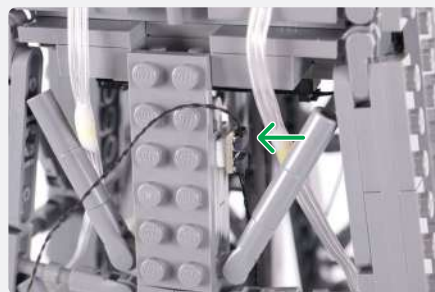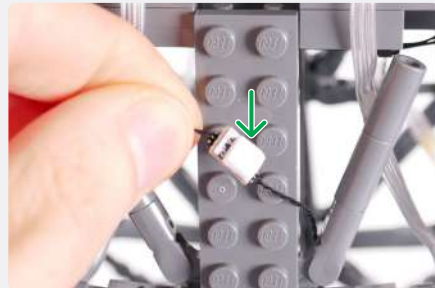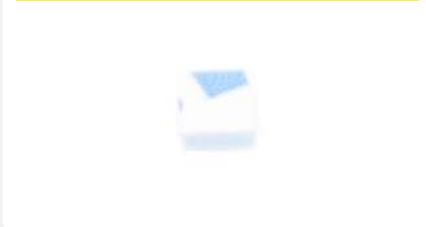




57

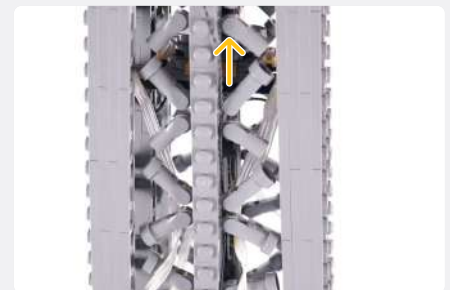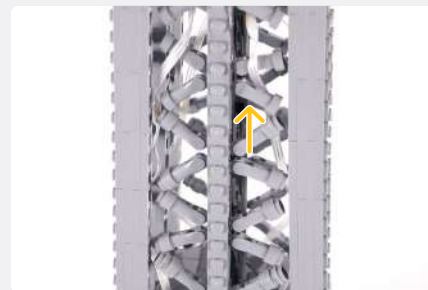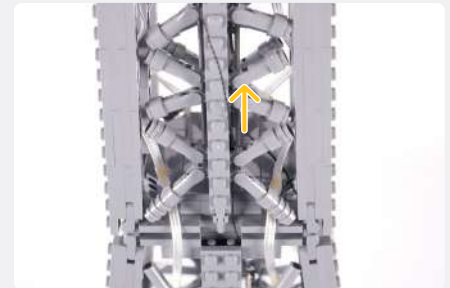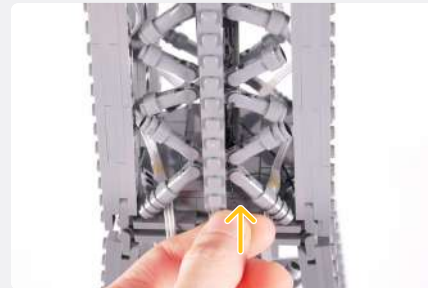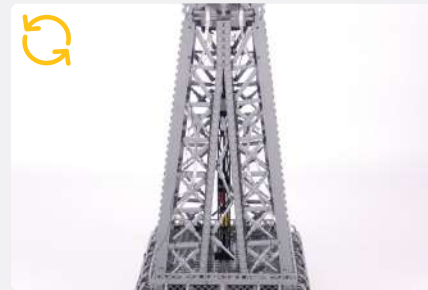

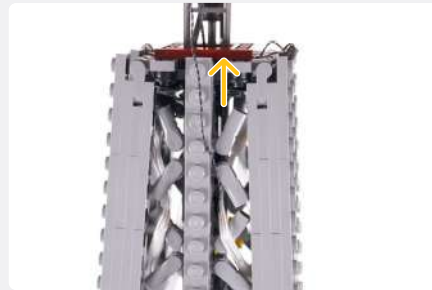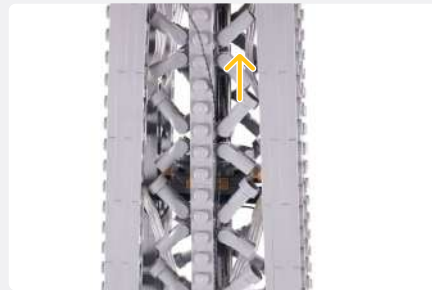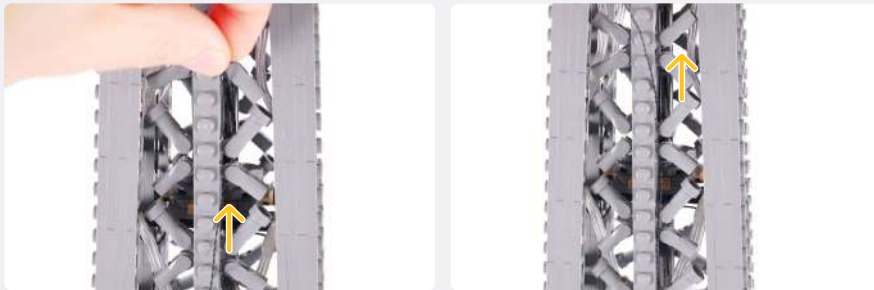



 **NOTE**

Thread the cable up through the middle of the tower like in Step 45.



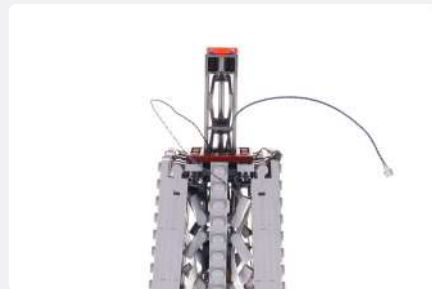
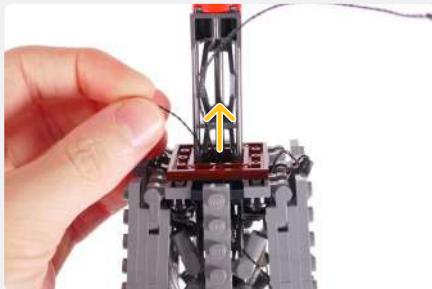
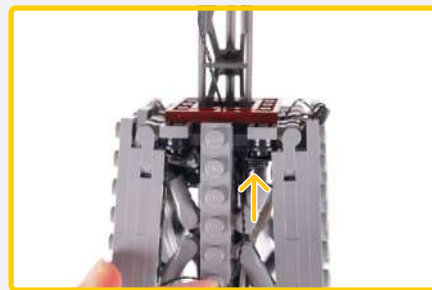


58


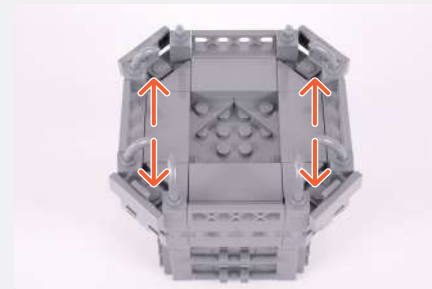


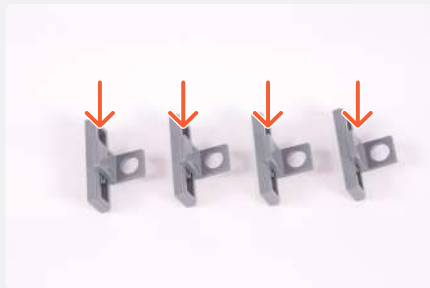

Bracket 1x1 - 1x1 Inverted - Dark Bluish Gray

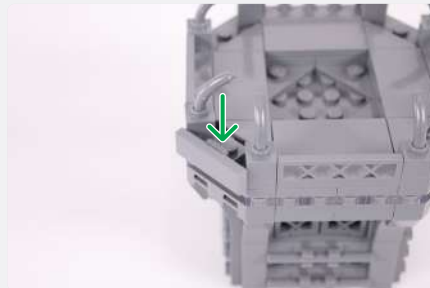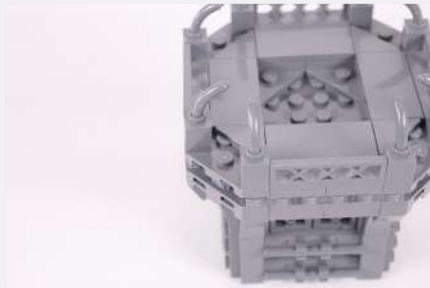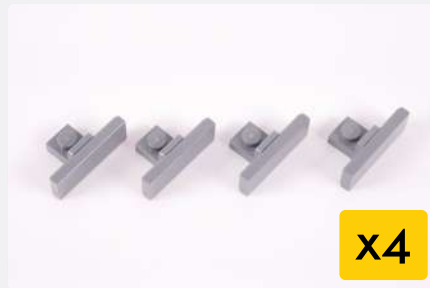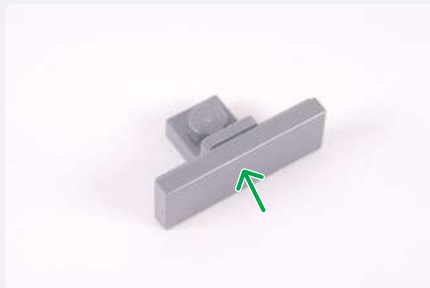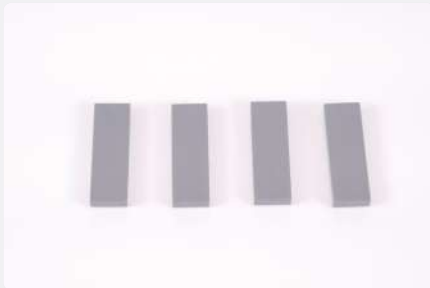



59

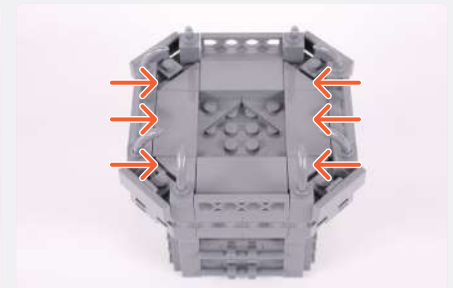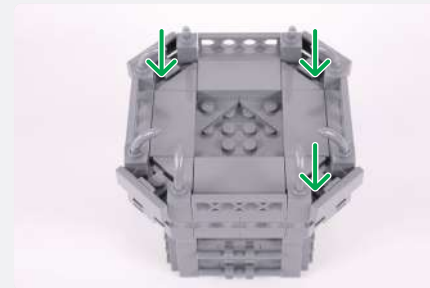


White 15cm Bit Light



Plate, Round 1x1 with Open Stud - Black

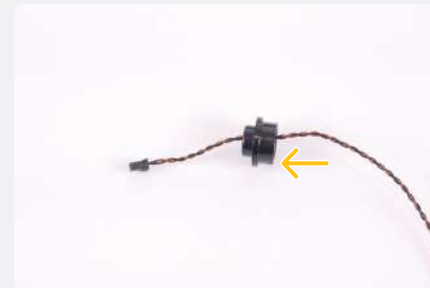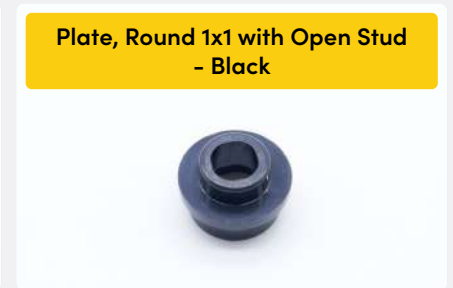


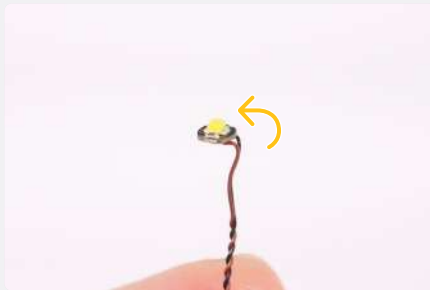





Plate, Round 1x1 with Bar Handle
- Black





60

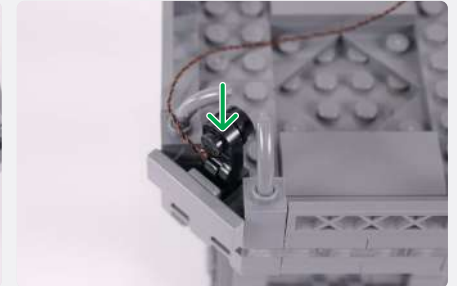

Tile, Modified 1x1 with Open O Clip
- Black

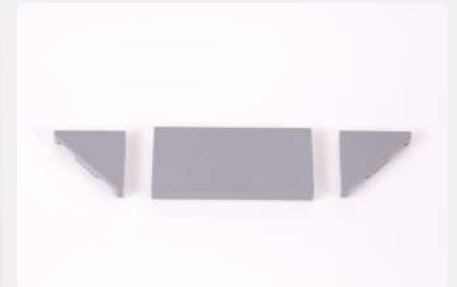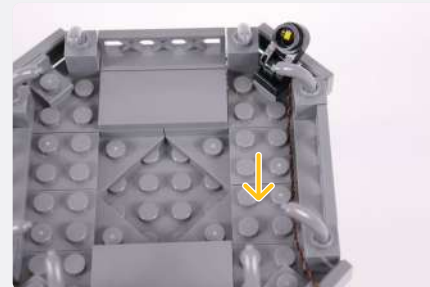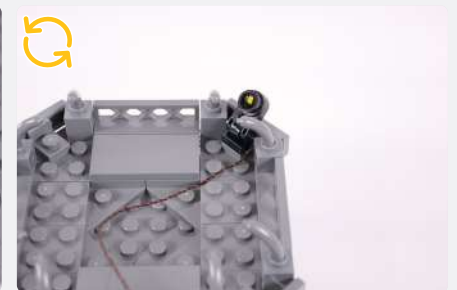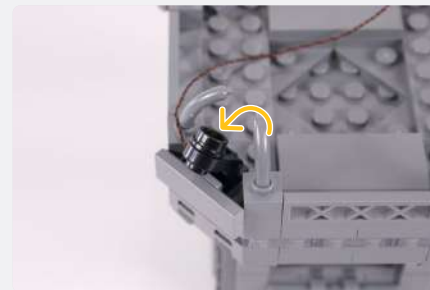

61

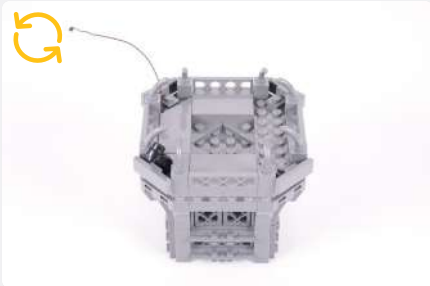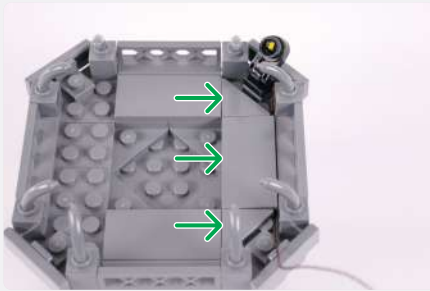

RGB 15cm Bit Light



Plate, Round 1x1 with Open Stud - Black






Plate, Round 1x1 with Bar Handle - Black




62



Tile, Modified 1x1 with Open O Clip - Black

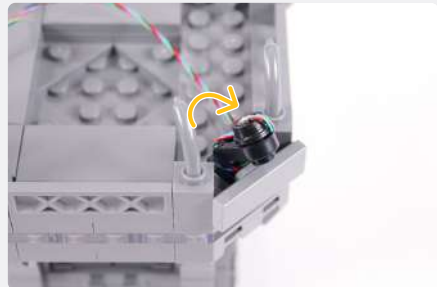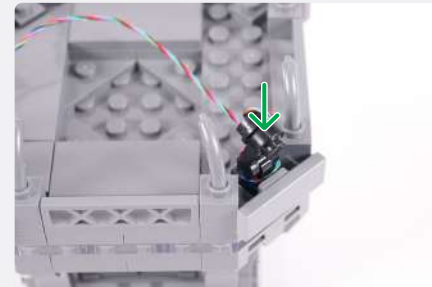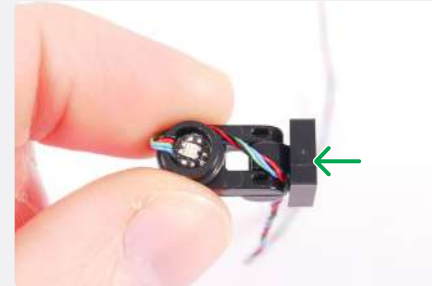

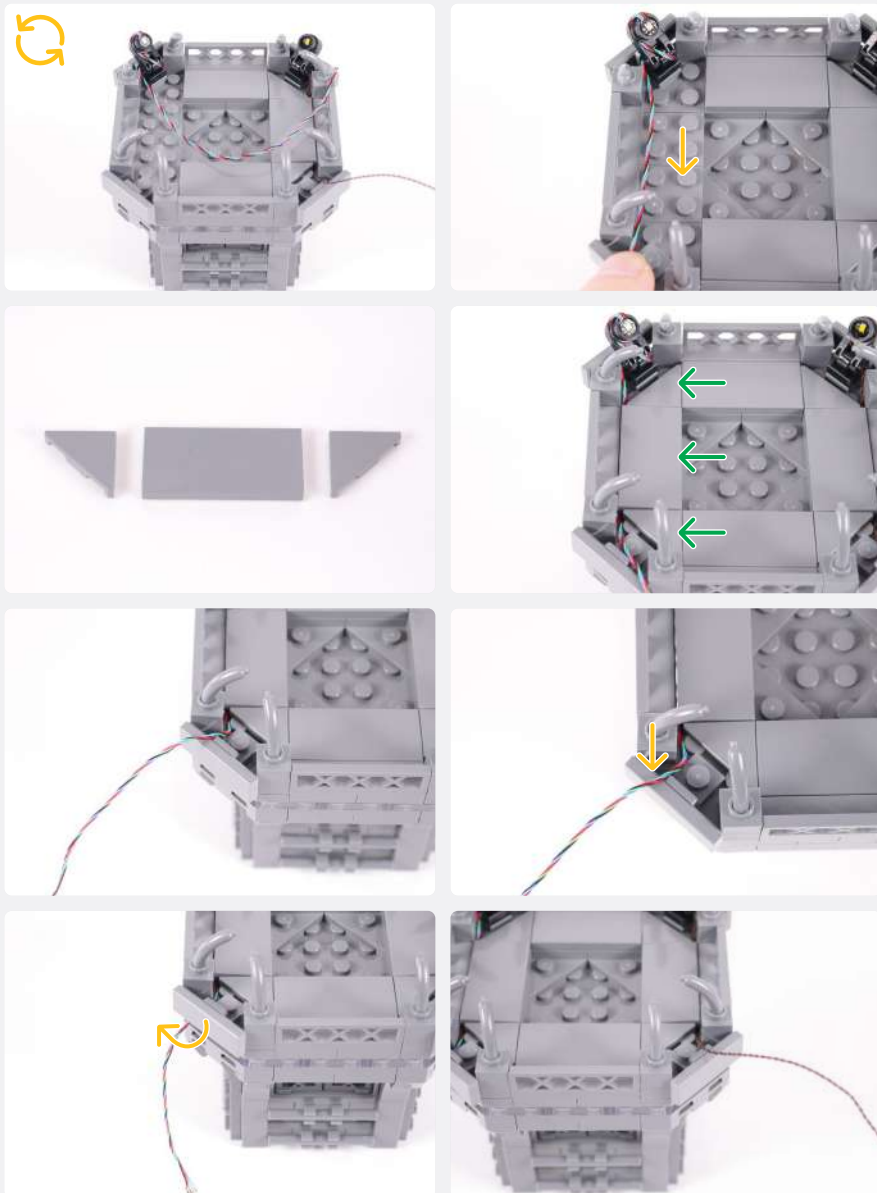


63



RGB 15cm Bit Light








Plate, Round 1x1 with Open Stud - Black

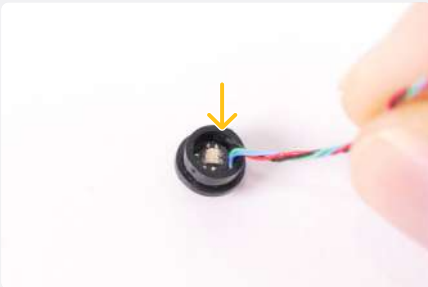








Plate, Round 1x1 with Bar Handle - Black




Tile, Modified 1x1 with Open O Clip
- Black

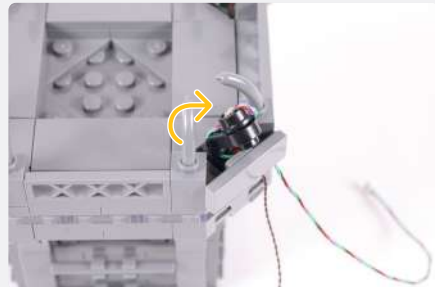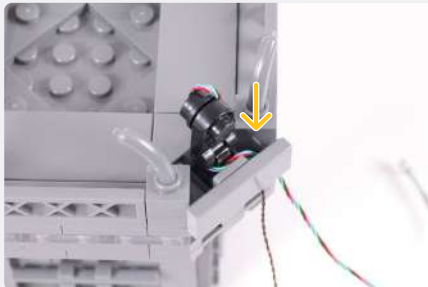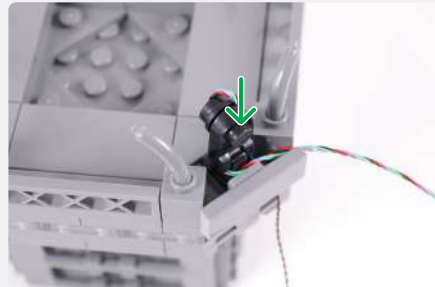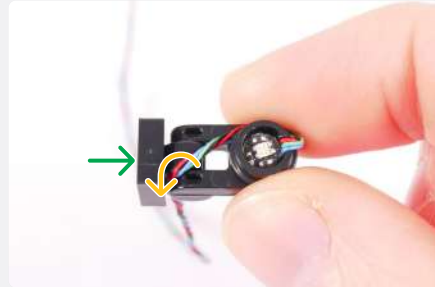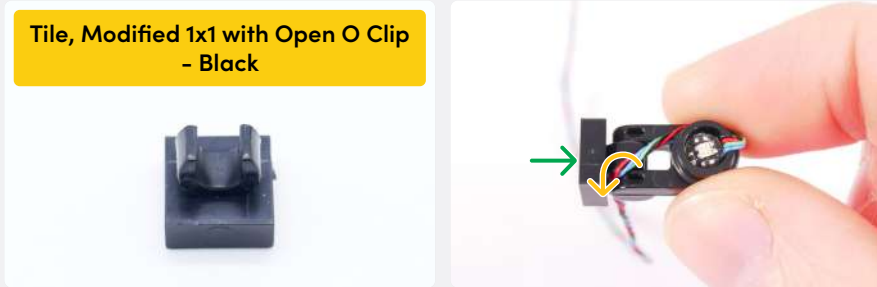


64

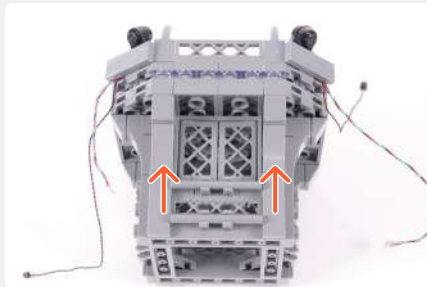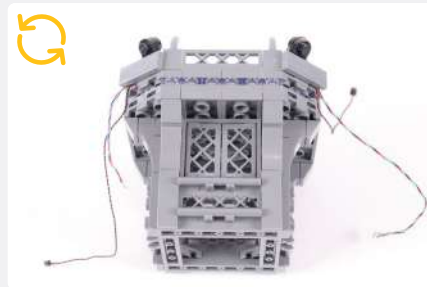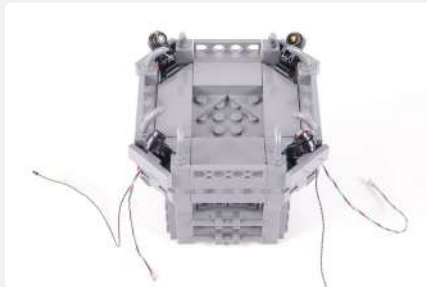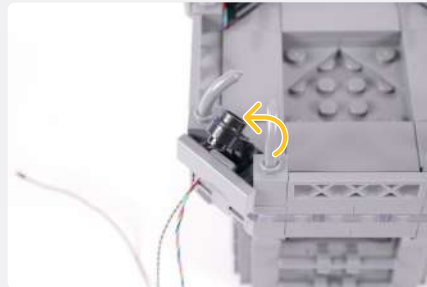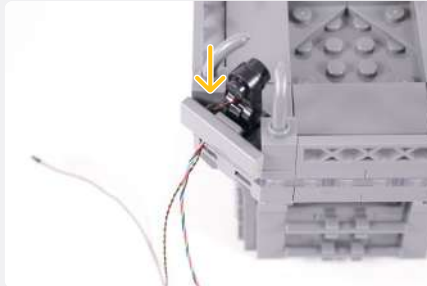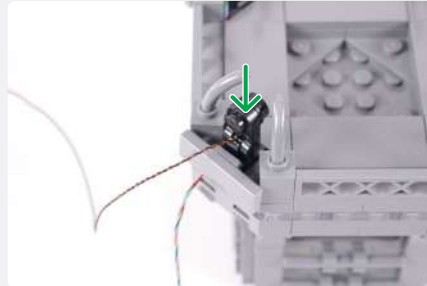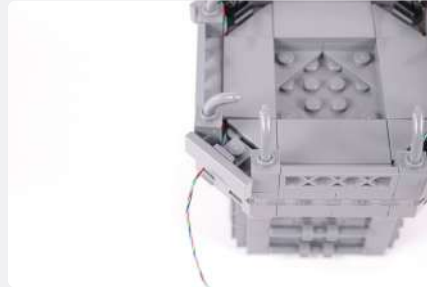




65

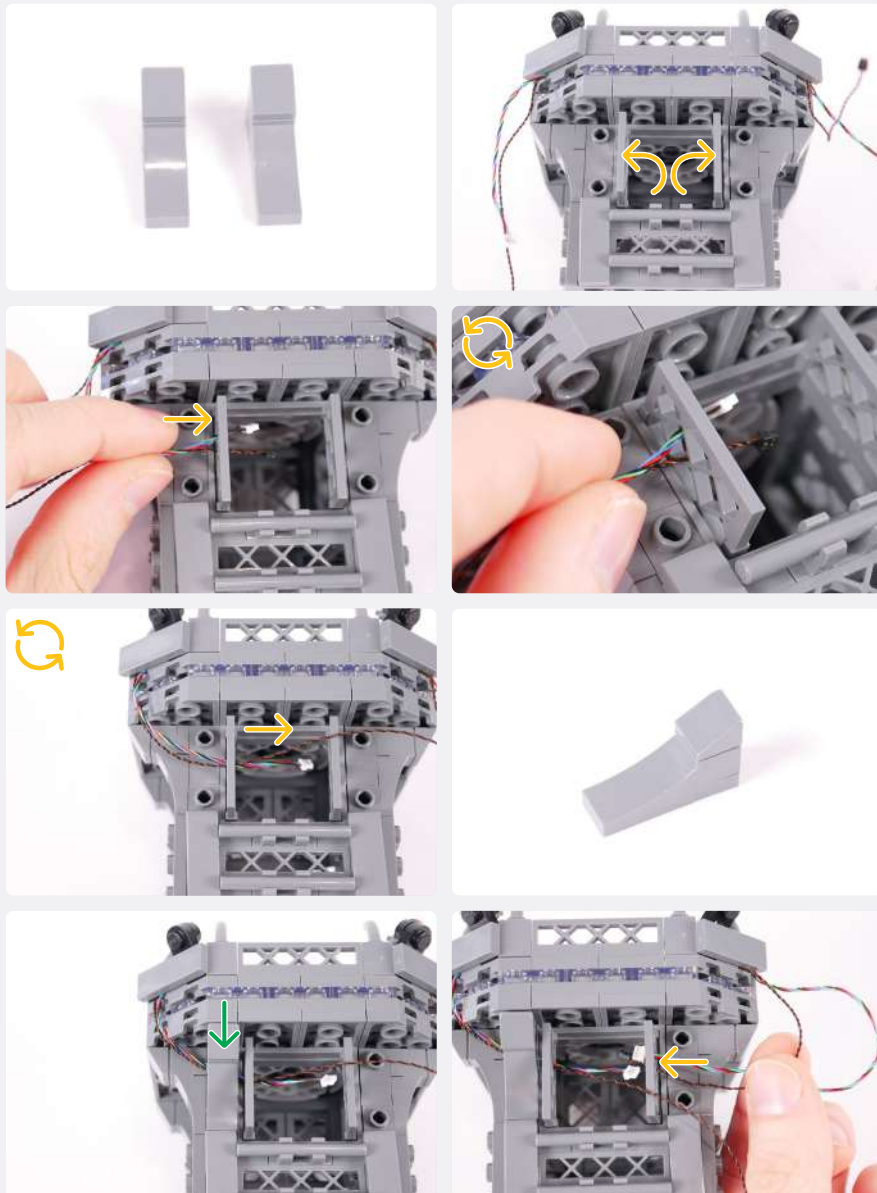


66


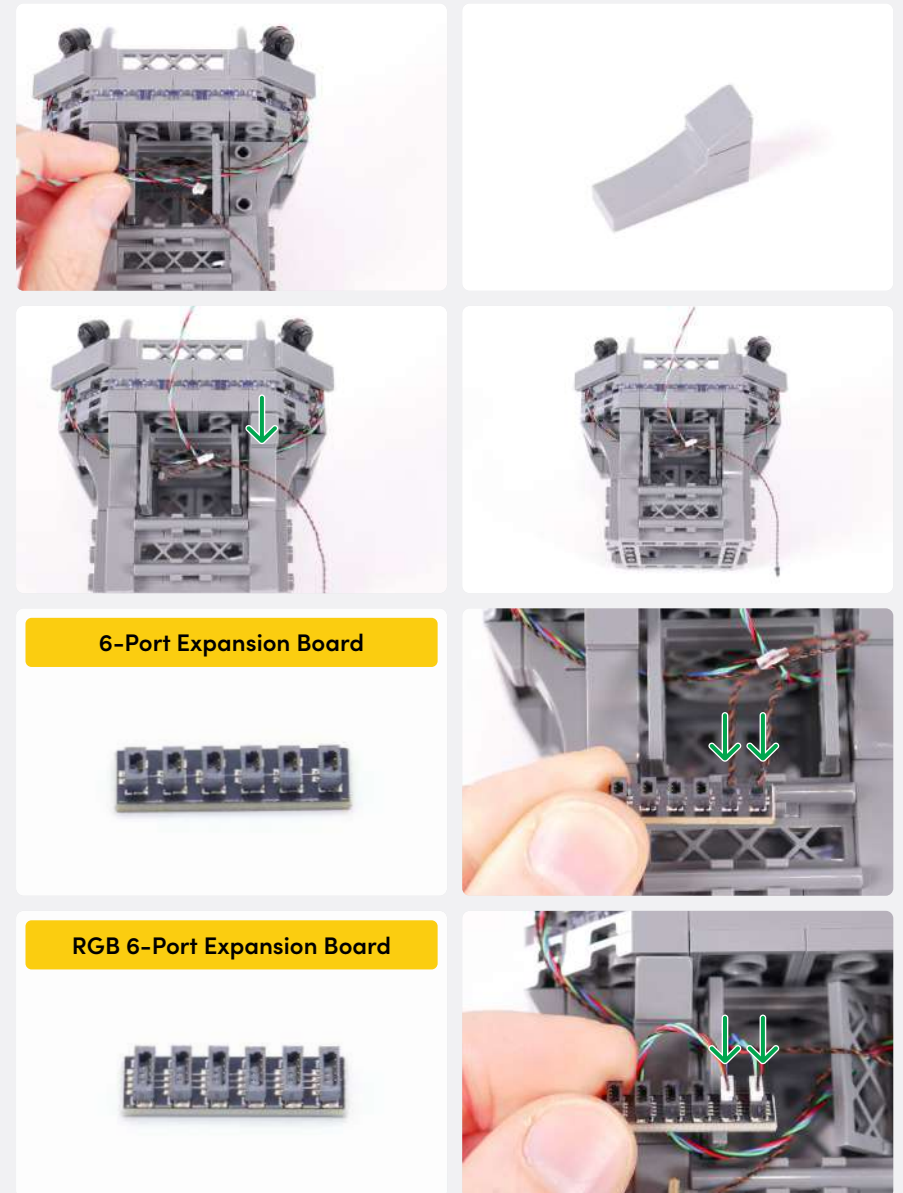


67

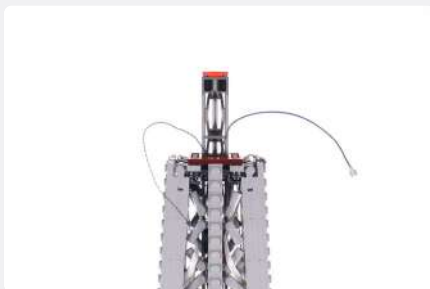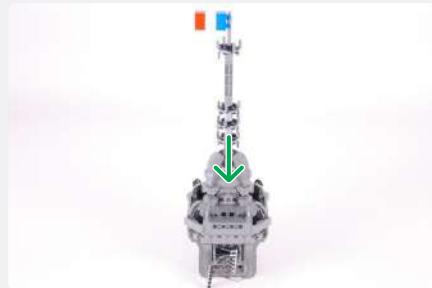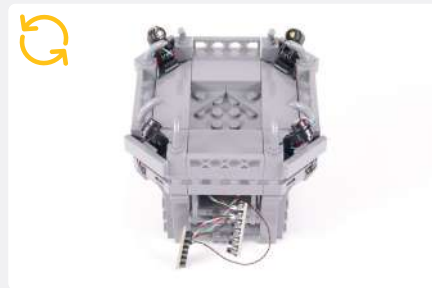



 **NOTE**

Thread the cables on the tower up through the open window on the top section, plug them into the corresponding boards.

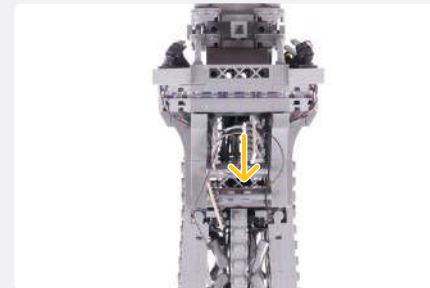
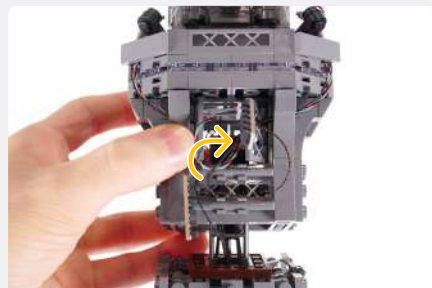


2x Adhesive Square

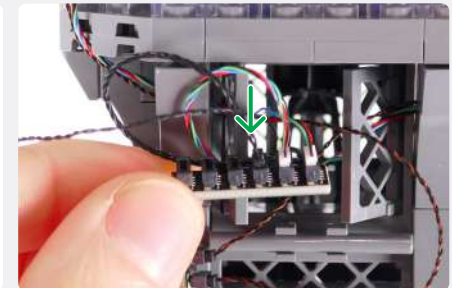



 **NOTE**



Attach the Adhesive Squares to the back of the RGB 6-Port Expansion Board.

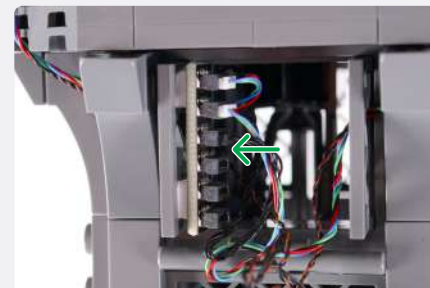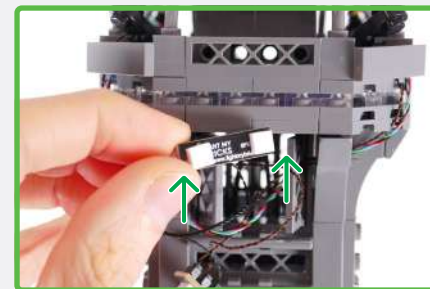



68

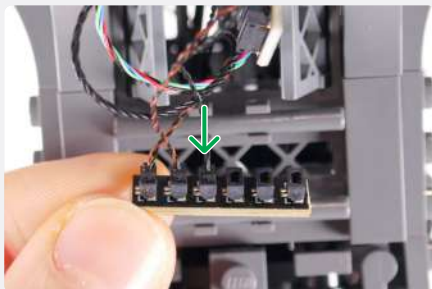






120cm Connecting Cable

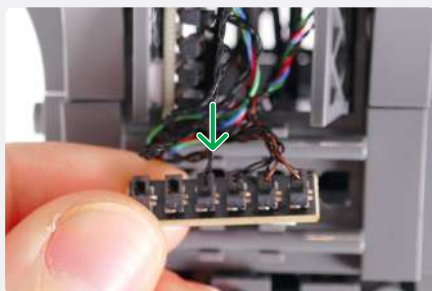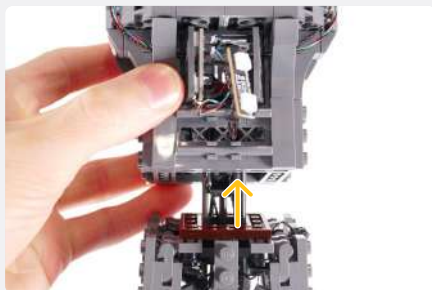


2x Adhesive Square

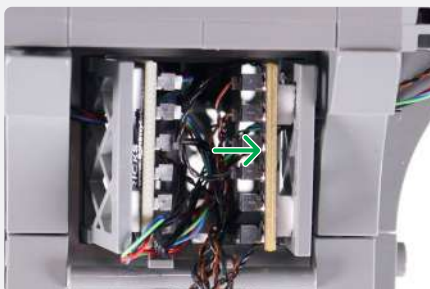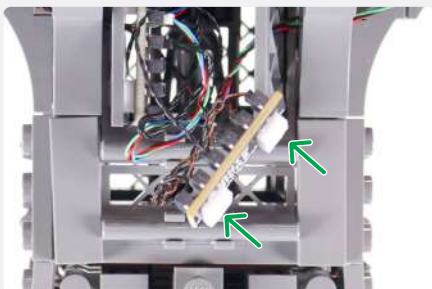



69

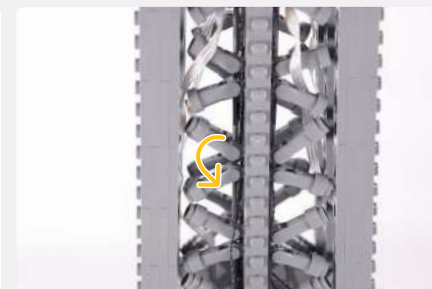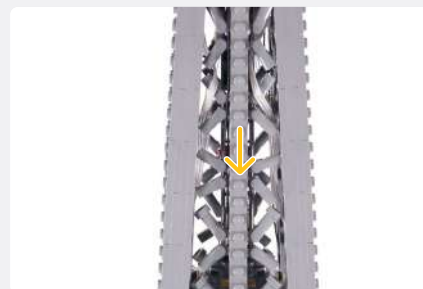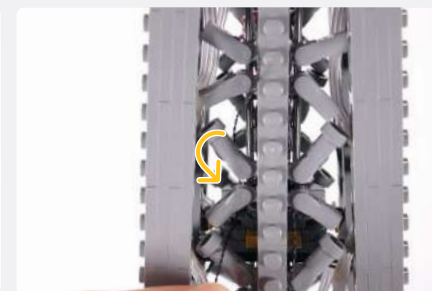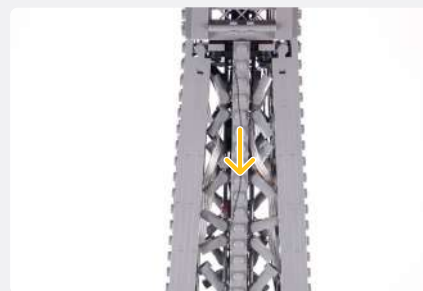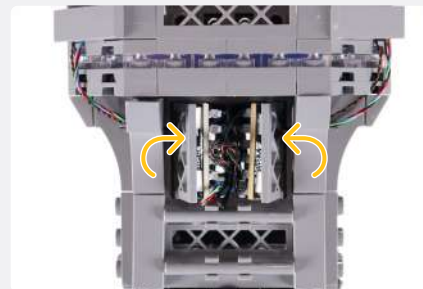

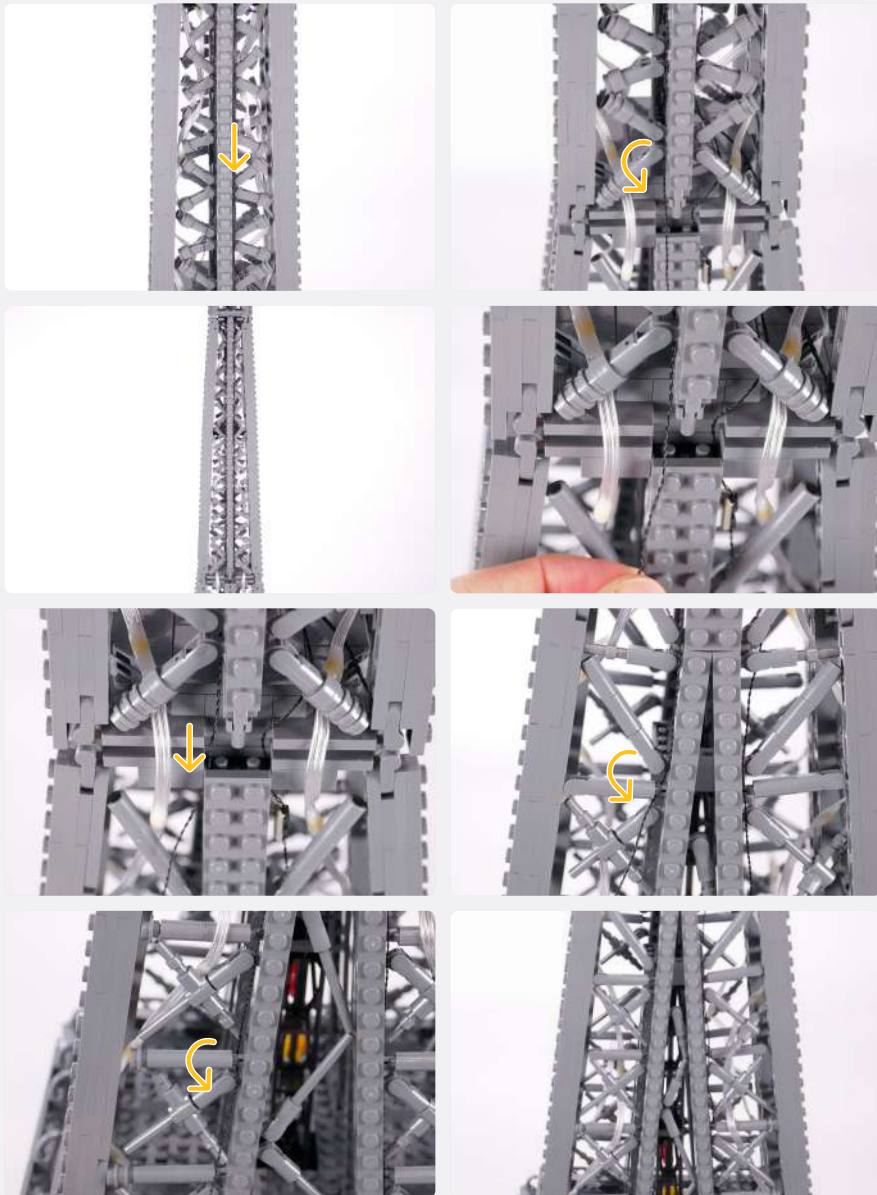



70

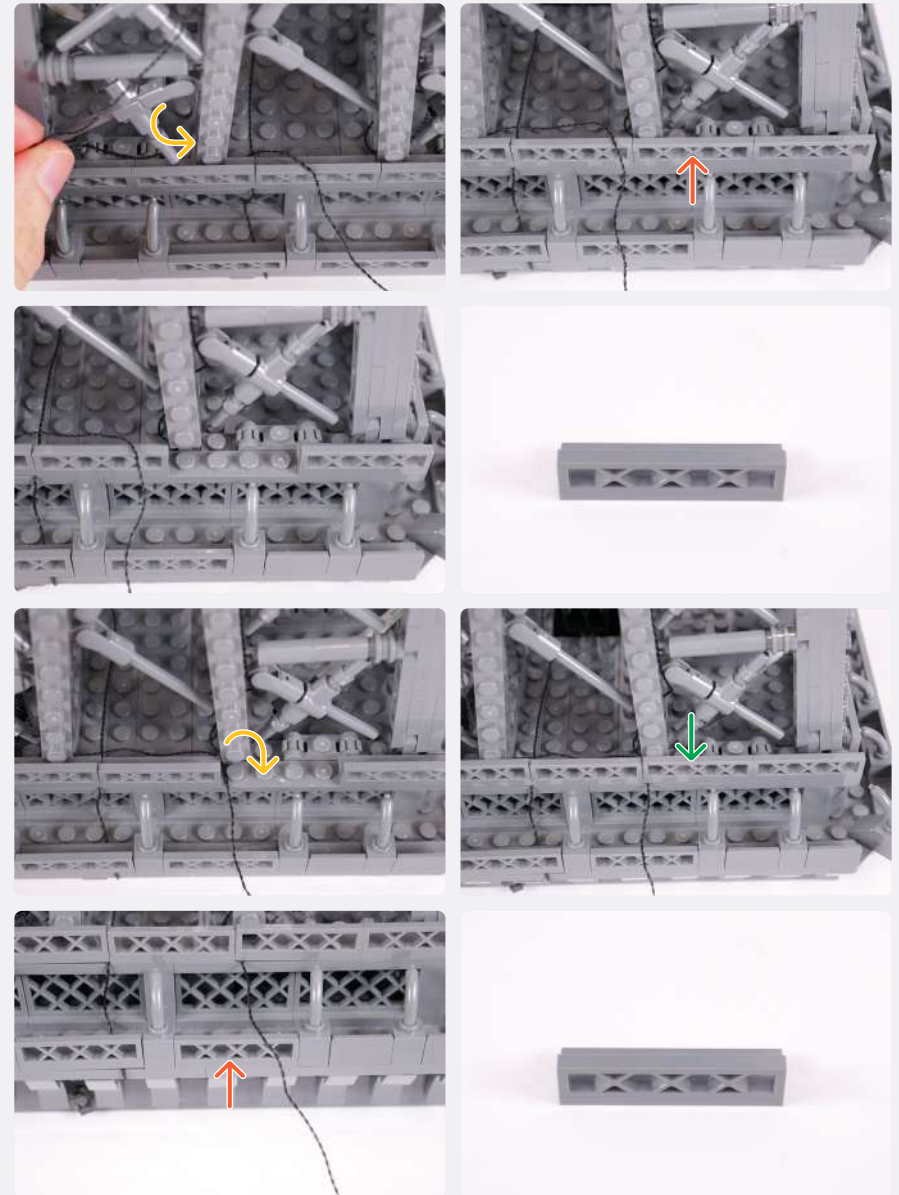

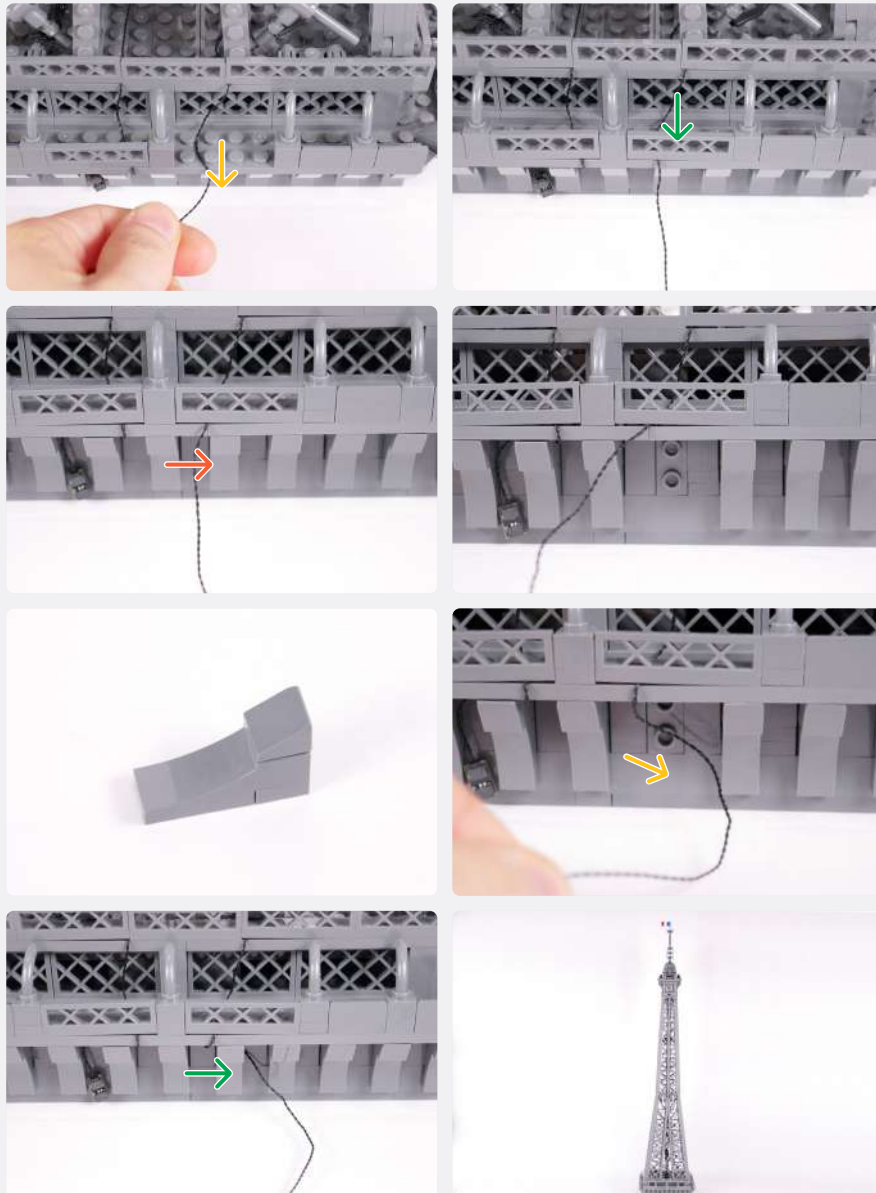

71

NOTE




Ensure the Eiffel Tower base with the USB Power Cables coming out is facing you. The Top Section side with the cables lines up with it.

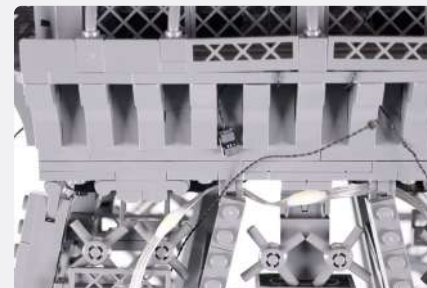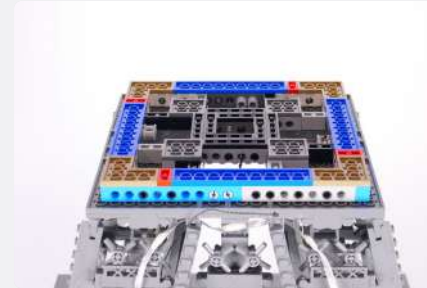
NOTE

Connect the 30cm Connecting Cable from Step 5 into the 2-Port Expansion Board from Step 29.


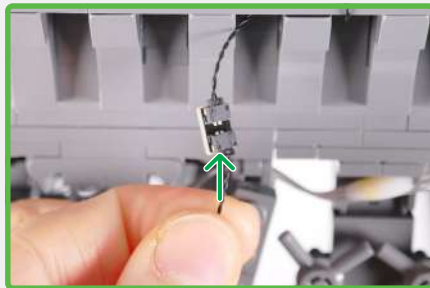



72

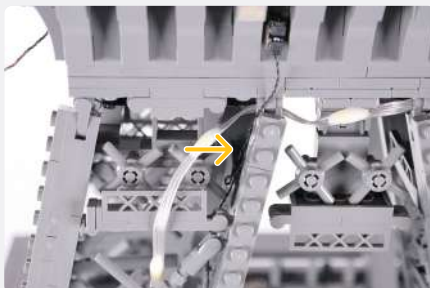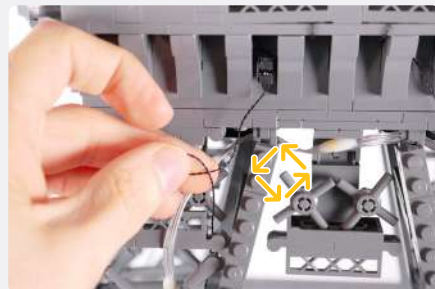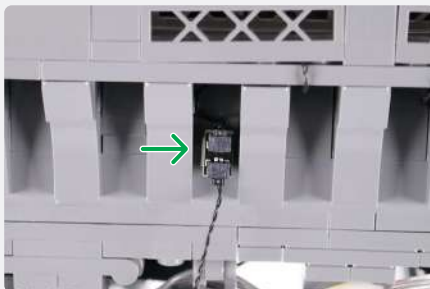

NOTE




Connect the String Light cable from Step 46 into the String Light from Step 22.

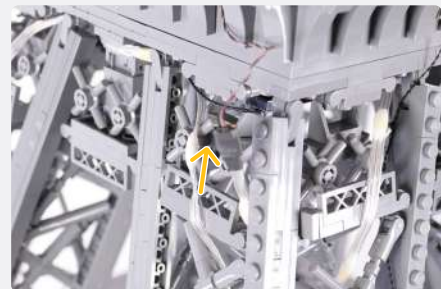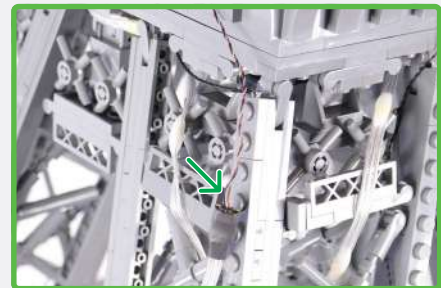

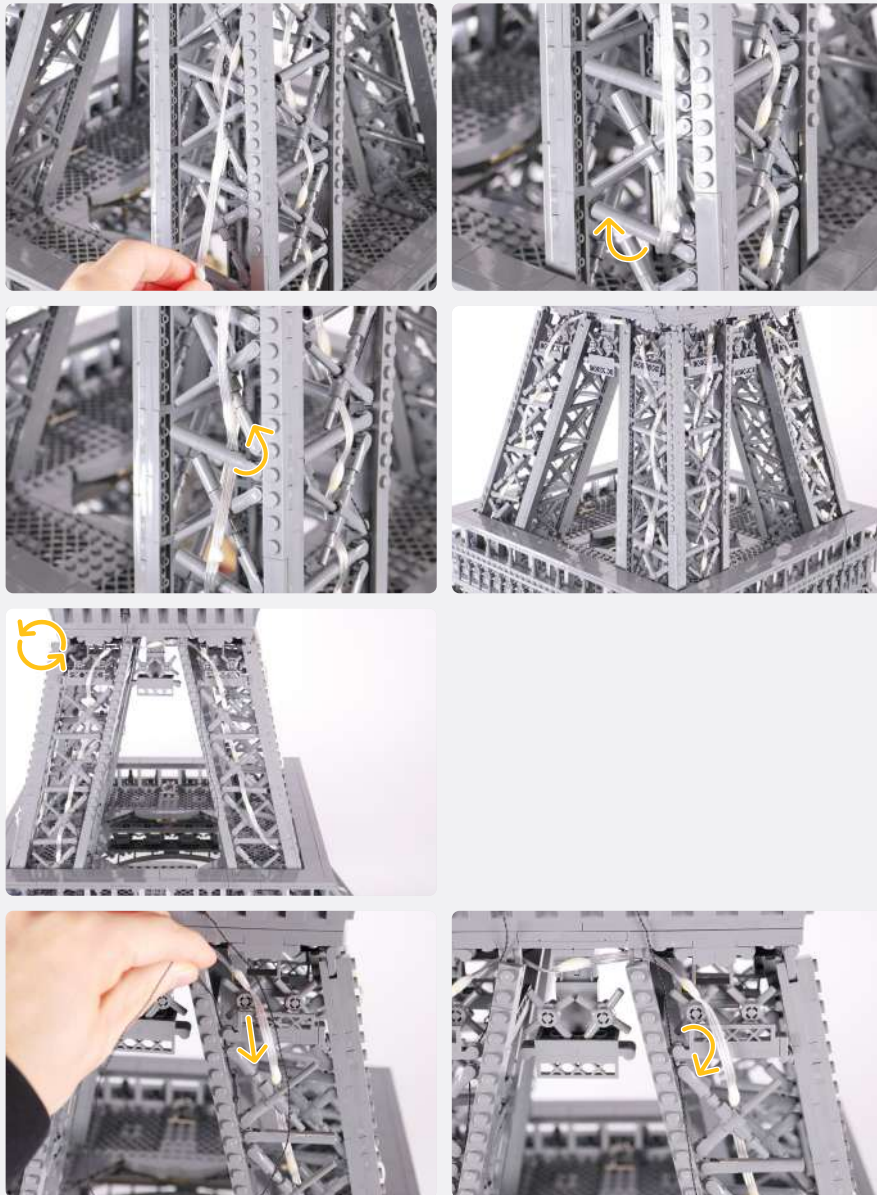


73


74

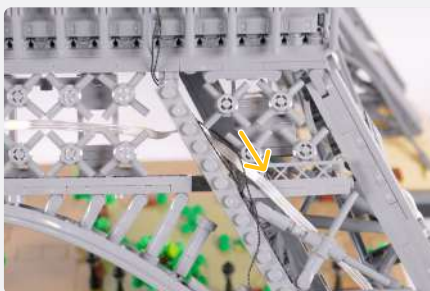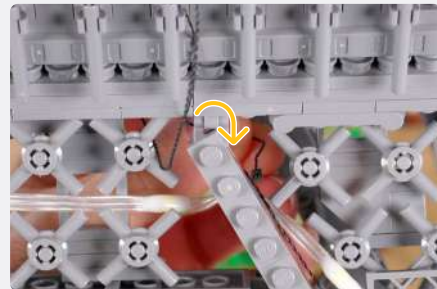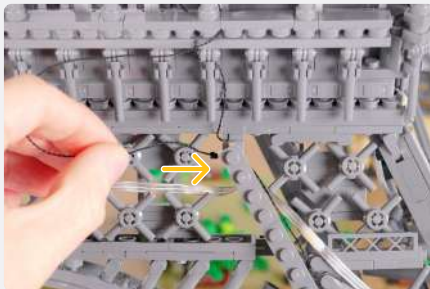




2-Port Expansion Board

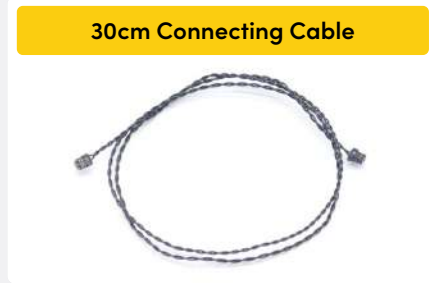









30cm Connecting Cable

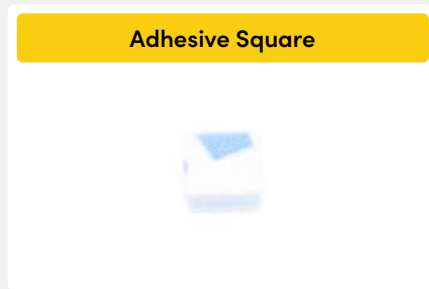



Adhesive Square

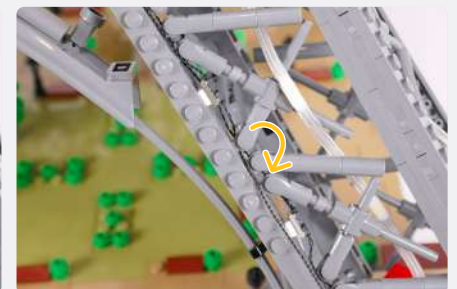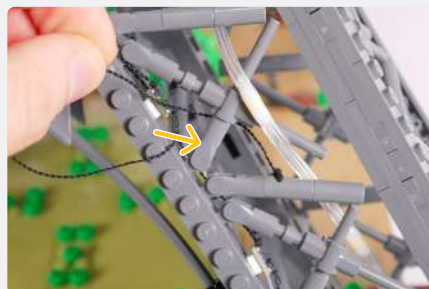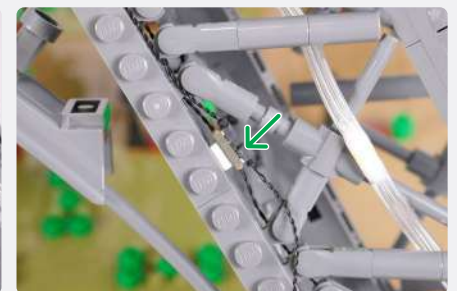


75

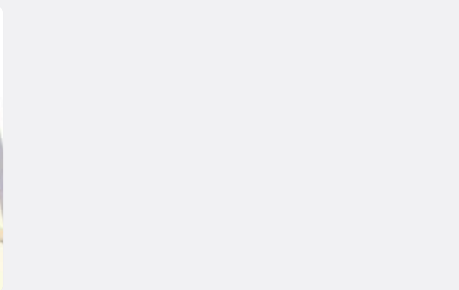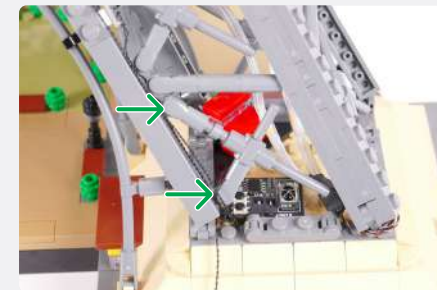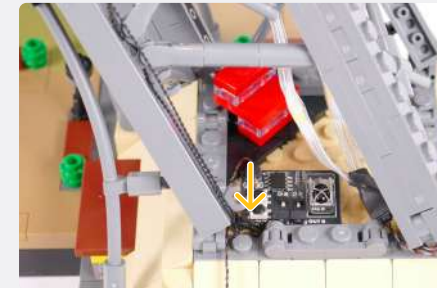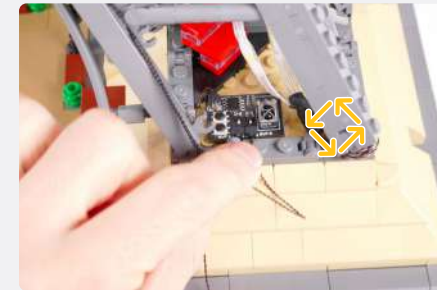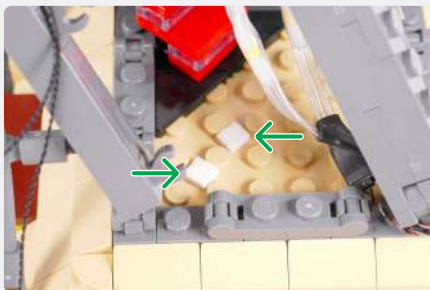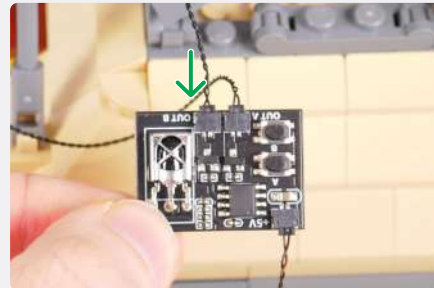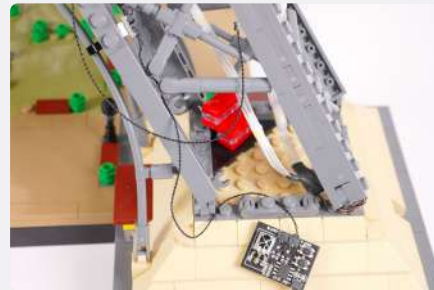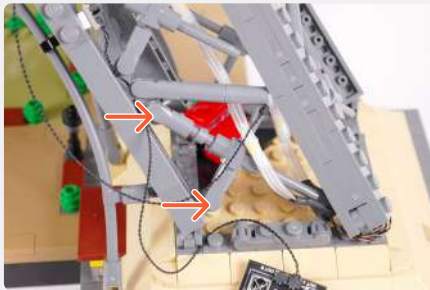

76

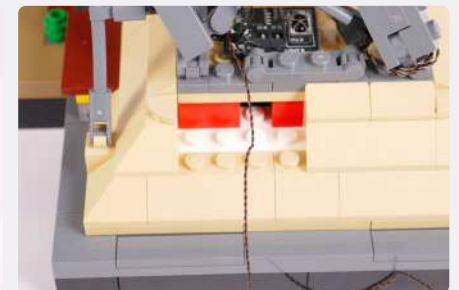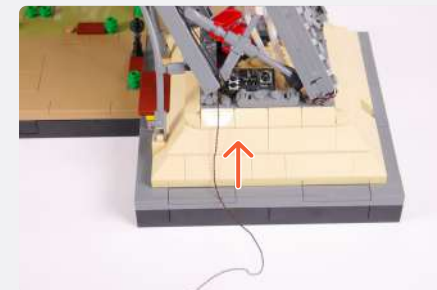

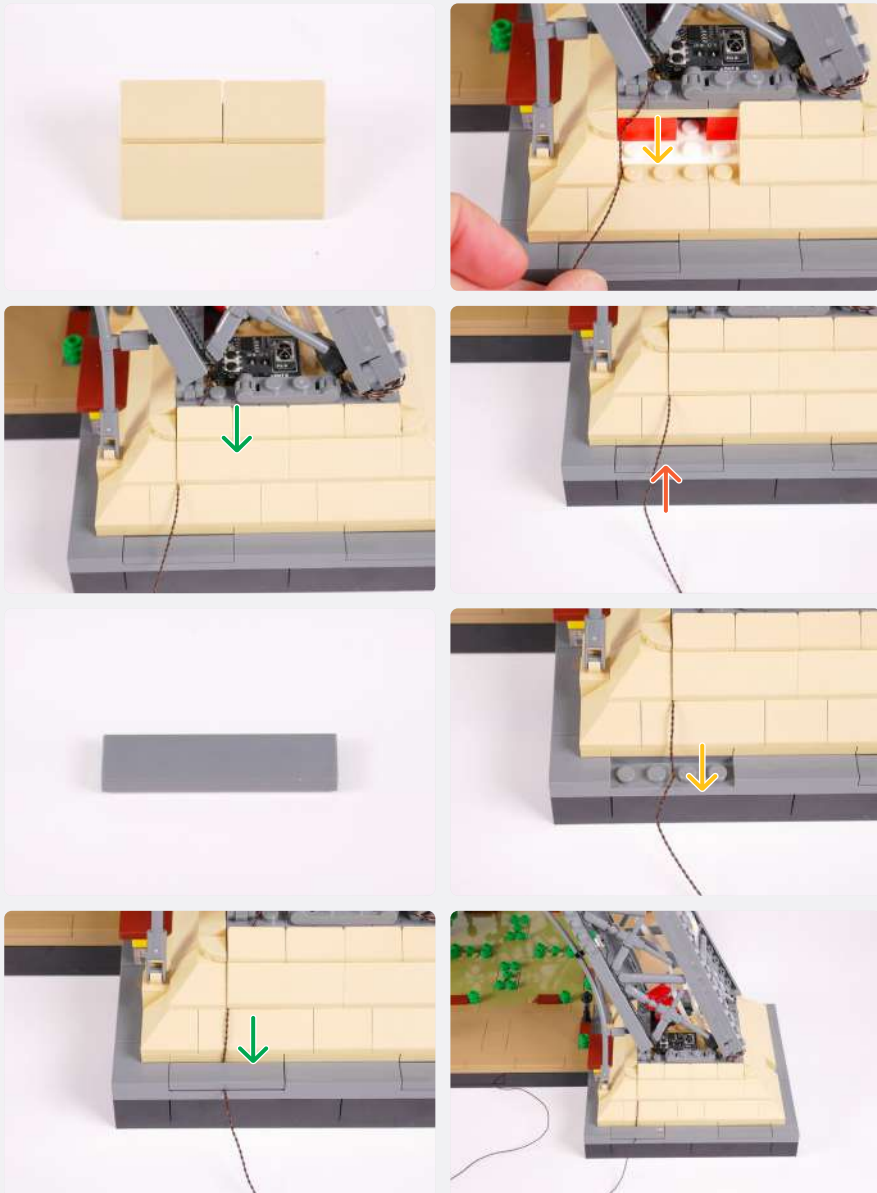


77



NOTE

Connect to a 5V USB Wall Adaptor (sold separately). A power bank or battery pack is not recommended to power this set.

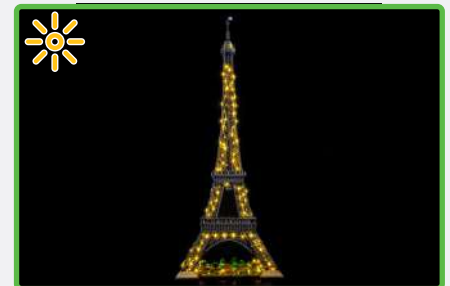

NOTE

Press the R, G, and B buttons on the Remote to change the Strip Lights and RGB Bit Lights to Red, Green, and Blue to test if they are working.





NOTE

Swap to the Sparkle Mode by pressing the ON and OFF buttons on the remote to test if the String Lights are working.



! If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section.

NOTE


You should have these parts left over that were removed from the LEGO set.

Removed Pieces

FINAL PRODUCT

This finally completes installation of the Light My Bricks

LEGO® Eiffel Tower 10307 Light Kit.

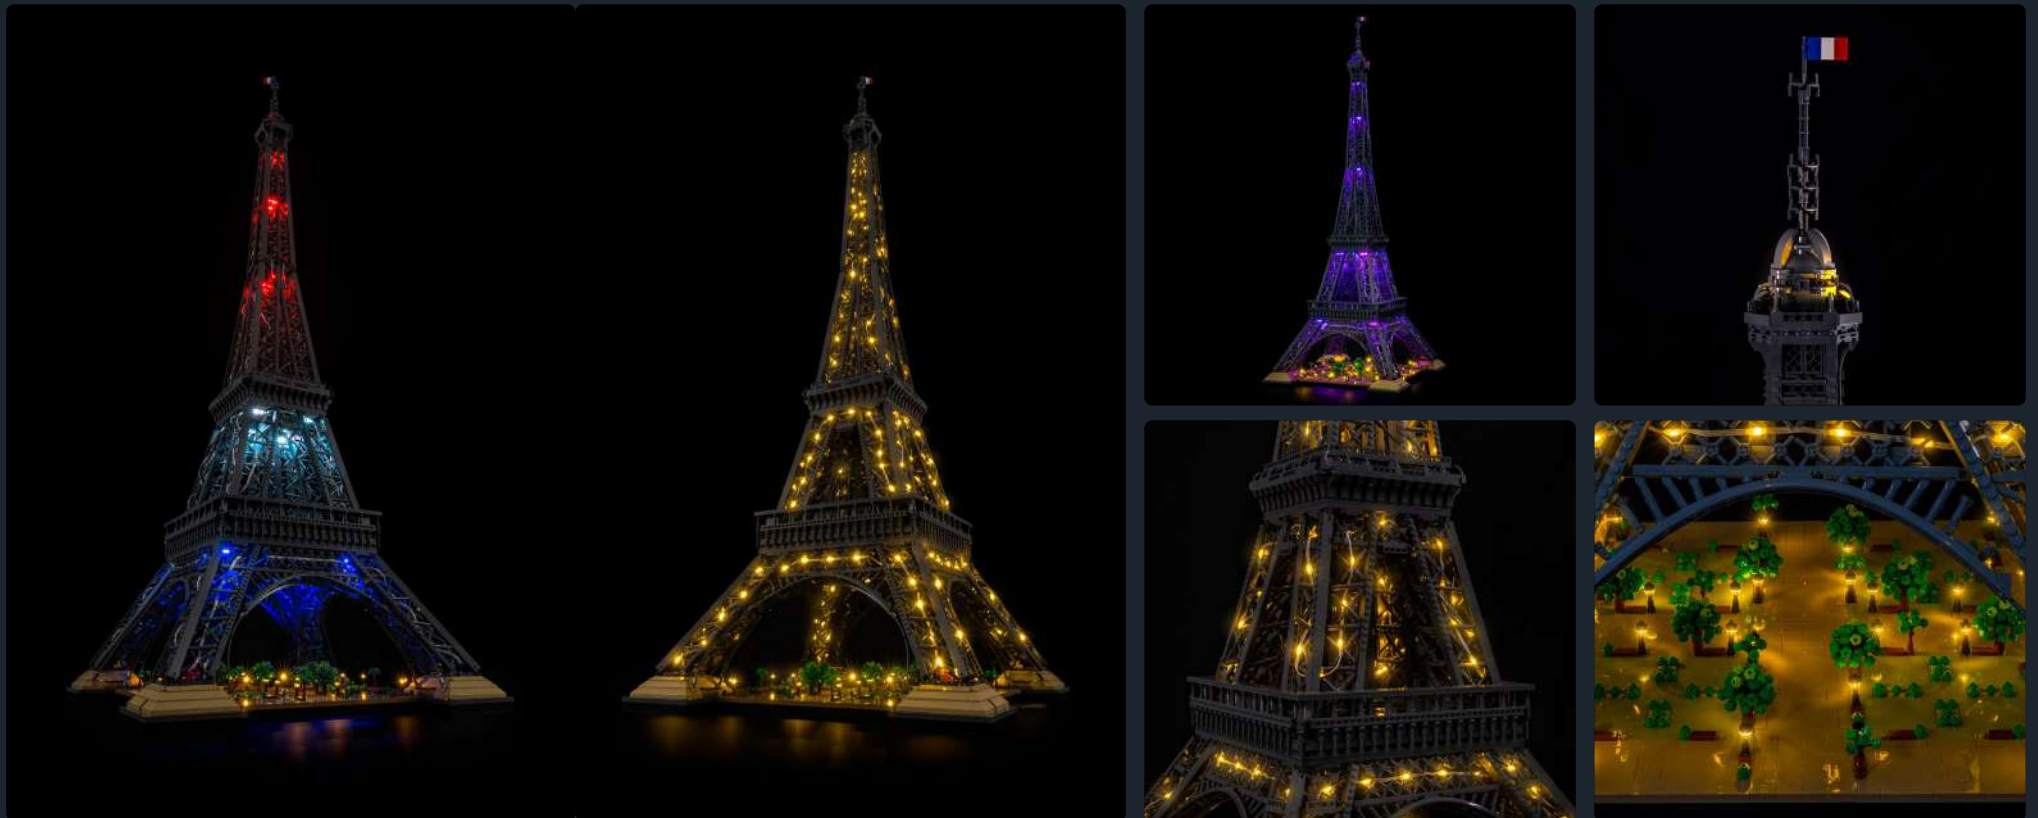



TROUBLESHOOTING

Light My Bricks lighting kits contain individual components that are very small and can be easily damaged if not handled correctly.

To prevent unnecessary damage to components, we highly recommend that the User Guide section, **“Important things to note”** is read carefully. Follow the handling procedures in the User Guide to help prevent faults and damages to your Light My Bricks components.

If you are experiencing issues with your Light My Bricks set, watch our troubleshooting video [here](#) or read on for a list of common causes to help you troubleshoot.

Troubleshooting

Firstly, ensure that the batteries have power using a battery charge gauge.


If the batteries have no power, replace the batteries.

If the batteries still have power, check to see if the batteries have been inserted correctly into the battery pack.

Check for AA batteries using the AA battery pack

Inside the battery pack are symbols indicating which direction the AA battery should be inserted. The flat side of the battery should be paired with the spring side of the battery pack.

If the batteries have been installed correctly and your kit still isn't operating correctly, the next step is to check the wiring.

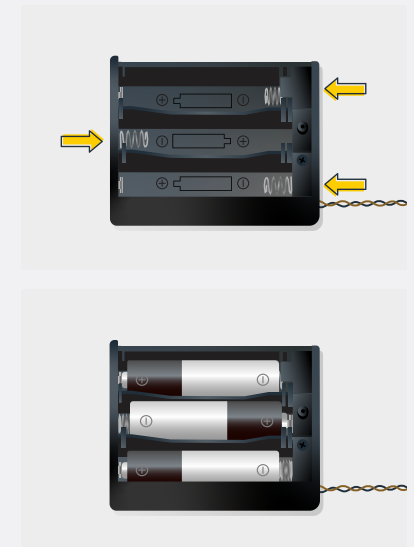

Troubleshooting

Check Your Wires



In order for Light My Bricks components to fit in between and underneath LEGO® bricks, the components need to be very small. Due to this nature, Light My Bricks components can be easily damaged when not handled correctly.

Be careful when removing unpacked components out of the packaging and ensure not to forcibly pull at the wires as this can damage the soldering that attach the wires to the LEDs.

If the wiring is detached from the LED itself, the light will not operate.

When connecting lights to your LEGO® set, check that there are no pinched wires underneath or in between bricks and plates.

When the wires are pinched and the exposed wires are touching each other, this can cause a crosswire and the lights to not function correctly.

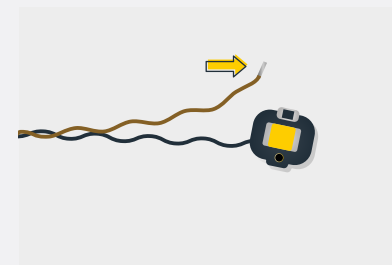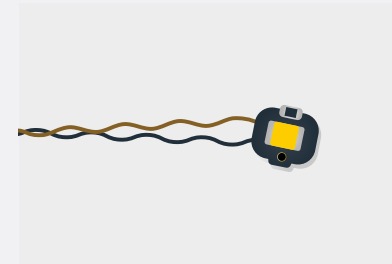


Troubleshooting

Check Your Expansion Board Ports / Strip Light Ports / Effects Board Ports

It is important to note that connectors can only be inserted to the expansion board, strip light, or effects board ports in one direction.

Forcibly inserting connectors in the incorrect direction will result in damaging the pins inside each of the ports on your component board.



Not only will a light connected to the damaged port not work, but if the pins inside the port are bent to a point they are touching each other, this can result in all other lights in the system to stop working. This is a short circuit.

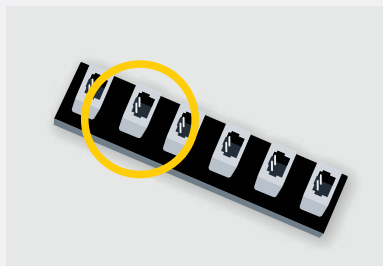

A short circuit can also result in overheating of the board, cable or batteries. If you suspect a short circuit, **DISCONNECT POWER IMMEDIATELY**. Batteries can fail, catch fire, or even explode if left connected to a short circuit for too long.

If you suspect you have a faulty component due to a bent pin, try the following steps:

If you look carefully inside each of the ports, each port contains 2 small pins that should be straight. You will be able to identify a faulty port if it has any bent pins.

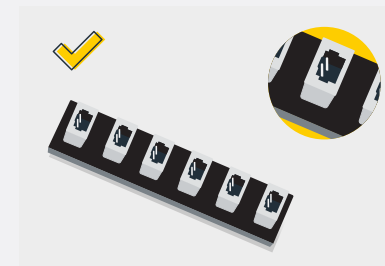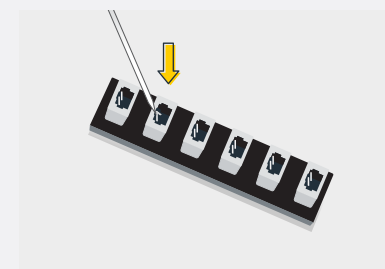



CONTACT US

If you have an enquiry regarding the online shop, our products or a general enquiry please refer to our Frequently Asked Questions webpage here.

Alternatively, you can contact our Customer Services team by visiting our online support portal here.

support.lightmybricks.com

We thank you for purchasing this product and hope you enjoy!



lightmybricks.com