

# LEGO® BOUTIQUE HOTEL #10297 LIGHT KIT INSTALLATION GUIDE



### **Light My Bricks**



### LEGO® BOUTIQUE HOTEL #10297 LIGHT KIT INSTALLATION GUIDE

Hi There!

We're here to help you get started on the LEGO®

Boutique Hotel (10297) Light Kit.

This PDF details the instructions for the LED light kit only. If you are wishing to purchase this product, please click here to view the product page.

If you run into any issues, please refer to the troubleshooting section towards the end of this guide.

Have fun and enjoy!





### **PACKAGE CONTENTS:**



9x Warm White Strip Light

6x White 30cm Bit Light

11x White 15cm Bit Light\*

1x Flashing White 30cm Bit Light

1x Lamp Post White



1 x 2-Port Expansion Board

4 x 6-port expansion Board 2 x 8-port expansion Board\*

10 x Adhesive Squares



4 x 30cm Connecting Cable\*

5 x 15cm Connecting Cable

2 x 5cm Connecting Cable

4 x Wireless Power Connectors



1 x USB Power Cable

(Power Source not Included)

### **LEGO PIECES:**



- 8 x Plate 1x6 (any colour)
- 5 x Round Plate 1x1 Open Stud Black
- 8 x Plate 1x1 Mod Rounded w Handle Black
- 4 x Arm Skeleton, Bent with Clips (Horizontal Grip) Black
- 2 x Round Plate 1x1 Open Stud White
- 4 x Round Plate 1x1 Trans Clear
- 4 x Plate 1x1 Trans Clear

\* Indicates 1 extra component has been included just in case!




### **Contents**

Before You Begin	4
Blueprint	8
Instructions	9
Final Product	52
Troubleshooting	53
Contact	58



### **Before You Begin**



### Laying cables in between and underneath bricks

Cables can fit in between and underneath LEGO® bricks, plates, and tiles providing they are laid correctly between the LEGO® studs. Do NOT forcefully join LEGO® together around cables; instead ensure they are laying comfortably in between each stud.

CAUTION: Forcing LEGO® to connect over a cable can result in damaging the cable and light.





## **Connecting Cable Connectors To Expansion Boards**

Take extra care when inserting connectors to ports of Expansion Boards. Connectors can be inserted only one way. With the expansion board facing up, look for the soldered "=" symbol on the left side of the port. The connector side with the wires exposed should be facing toward the soldered "=" symbol as you insert into the port. If a plug won't fit easily into a port connector, do not force it.

Incorrectly inserting the connector can can result in bent pins inside the port or possible overheating of the expansion board when connected.



### **Before You Begin**



### **Connecting Cable Connectors To Strip Lights**

Take extra care when inserting connectors to ports on the Strip Lights. Connectors can be inserted only one way. With the Strip Light facing up, ensure the side of the connector with the wires exposed is facing down. If a plug won't fit easily into a port connector, don't force it. Doing so will damage the plug and the connector.



### Connecting Micro Cable Connectors To Micro Expansion Board Ports


Take extra care when inserting the micro connectors to micro ports of Micro Expansion Boards. Connecting Micro Bit Lights to Micro Expansion Boards is similar to connecting lights and cables to Strip Lights. With the expansion board facing up, ensure the side of the connector with the wires exposed is facing down. If a plug won't fit easily into a port connector, do not force it. Use your fingernail to push the plastic part of the connector to the micro port.



### **Before You Begin**

### **Installing Bit Lights Under Lego® Bricks And Plates**

When installing Bit Lights under LEGO® pieces, ensure they are placed the correct way up (Yellow LED component exposed). You can either place them directly on top of LEGO® studs or in between.

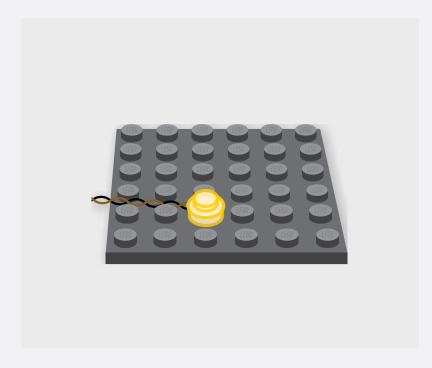










### **BLUEPRINT**

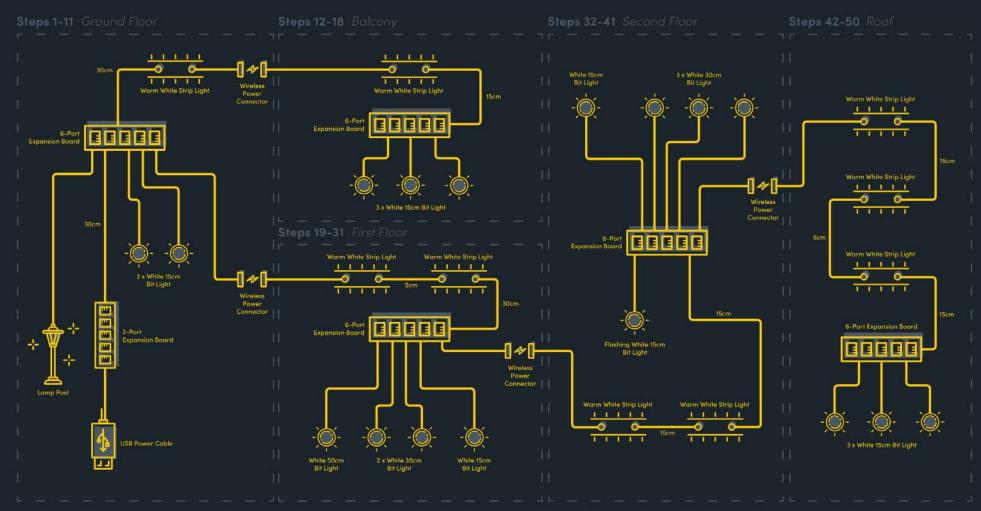






### **INSTRUCTIONS**

To ensure a smooth installation of your light kit, please read and follow each step carefully. If you run into any issues, please refer to the online troubleshooting guide.





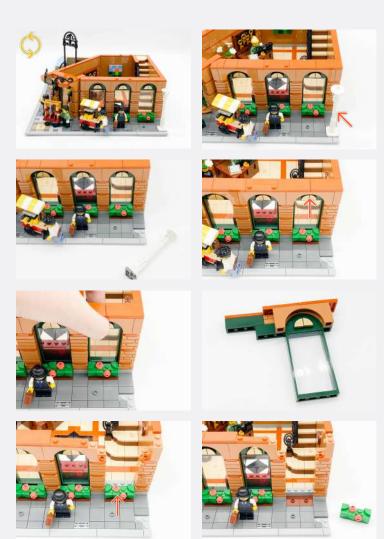



 $\rightarrow$  DISCONNECT  $\rightarrow$ 


























→ DISCONNECT →

CONNECT / RECONNECT



TURN / FLIP -> DIRECTIONAL 🚜 TWIST / BRAID 🔆 POWER ON TEST 🕜 NOTE ICON

























→ DISCONNECT →

CONNECT / RECONNECT









TURN / FLIP -> DIRECTIONAL 🚜 TWIST / BRAID 🔆 POWER ON TEST 🕜 NOTE ICON






































 $\rightarrow$  DISCONNECT  $\rightarrow$ 

CONNECT/ RECONNECT





























→ DISCONNECT →

CONNECT / RECONNECT
















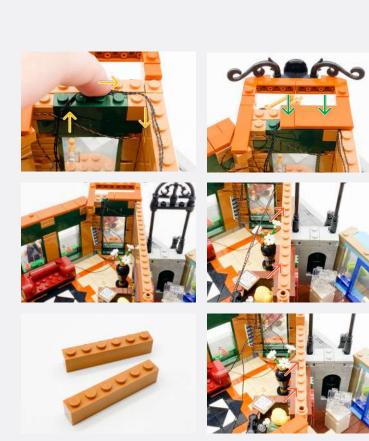








 $\rightarrow$  DISCONNECT  $\rightarrow$ 

CONNECT / RECONNECT











**Grab** one (of two) 30cm Connecting Cable and thread it as shown

















**10** 
















Legend

Grab the second 30cm Connecting Cable and thread it as shown

 $\rightarrow$  DISCONNECT  $\rightarrow$ 

CONNECT / RECONNECT











Connect to a

sold seperately)

🗹 If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section.































Legend

→ DISCONNECT →

RECONNECT
















CONNECT / RECONNECT

→ DISCONNECT →

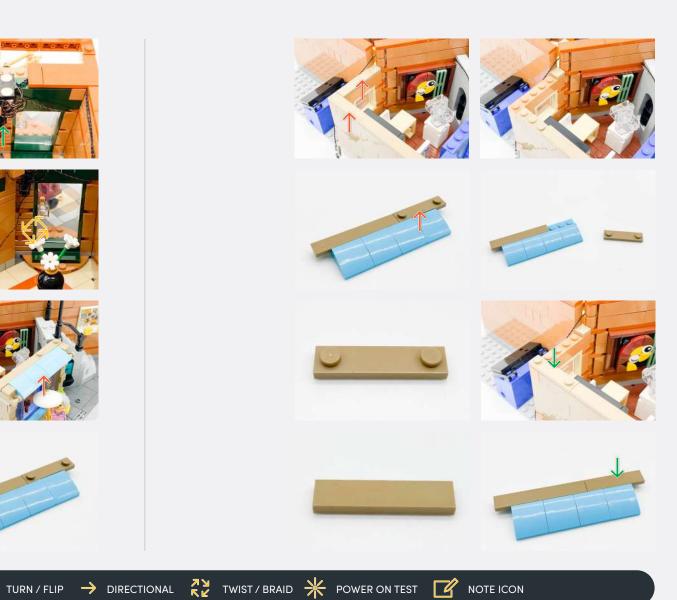


14

Legend



**13** 



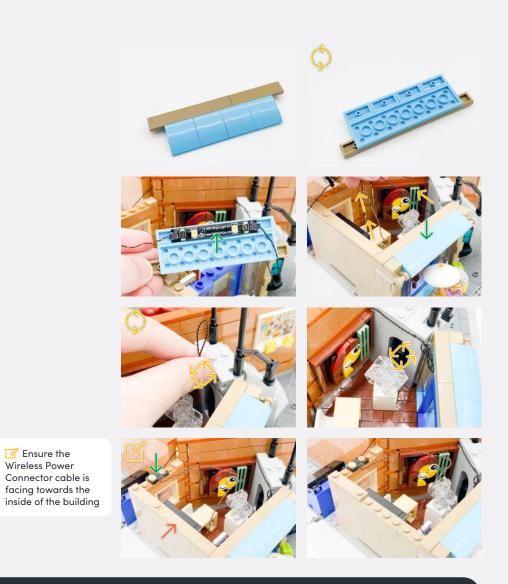

Legend












**Ensure** the Wireless Power










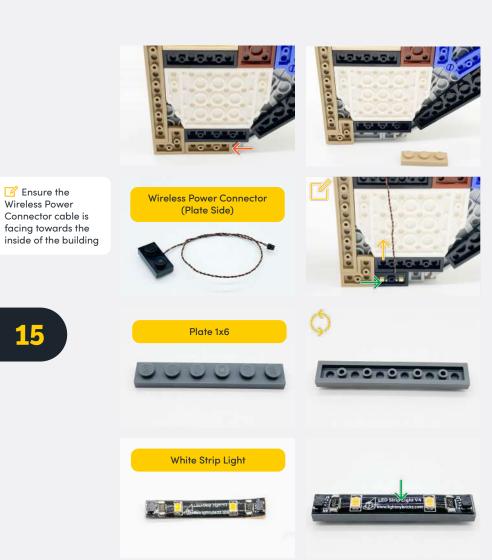

**Ensure** the

Wireless Power



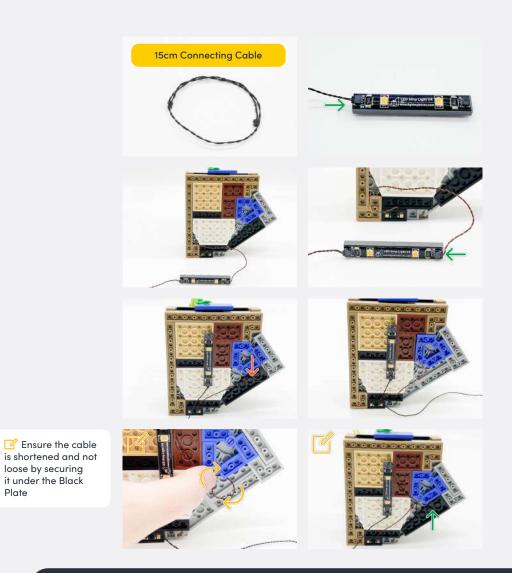



→ DISCONNECT →

CONNECT/ RECONNECT












loose by securing it under the Black

Plate



**16** 

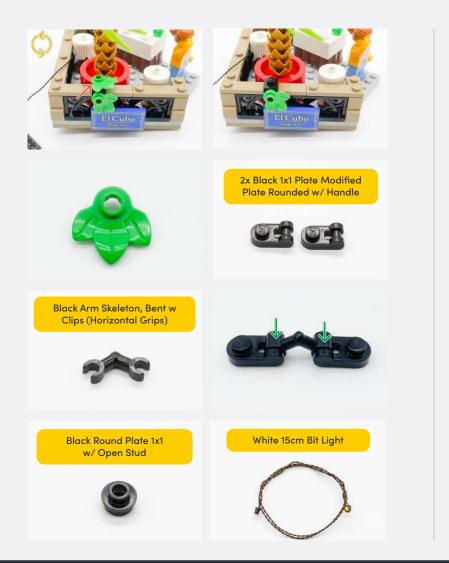







 $\rightarrow$  DISCONNECT  $\rightarrow$ 




















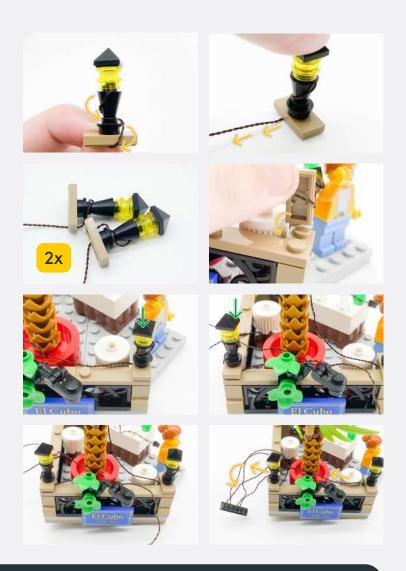















🗹 If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section.




















Legend

→ DISCONNECT →

CONNECT / RECONNECT







**When** 

alligned

to page 54








**19** 



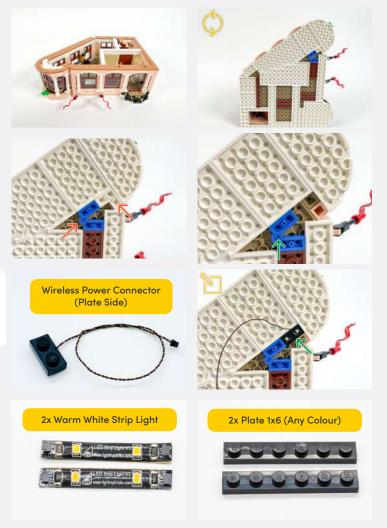



























20




































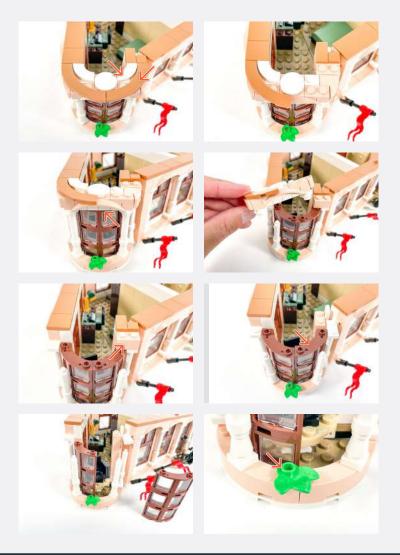



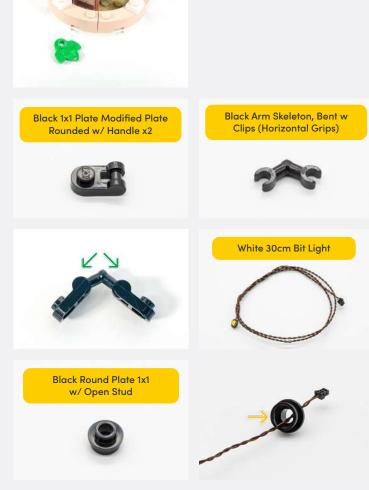





CONNECT/ RECONNECT















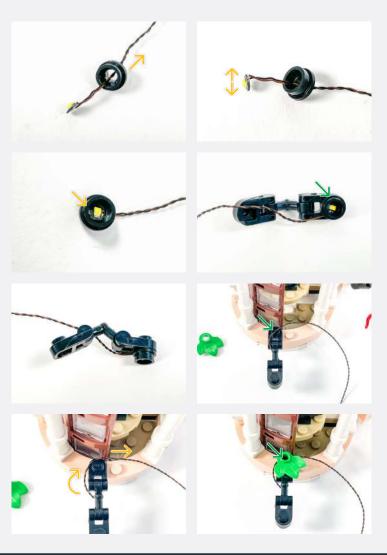

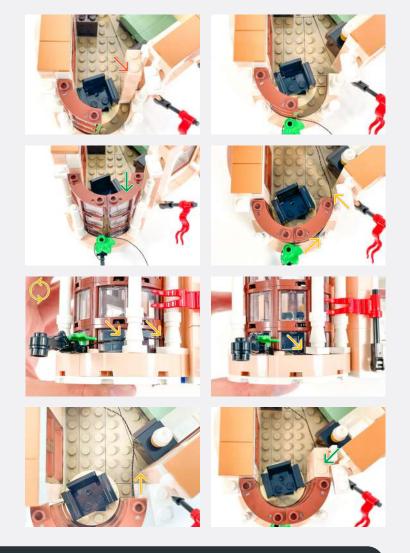



















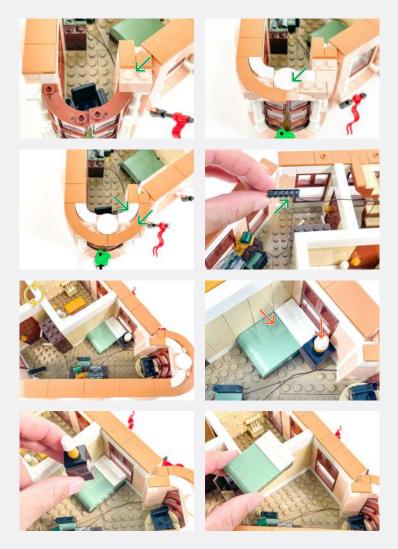

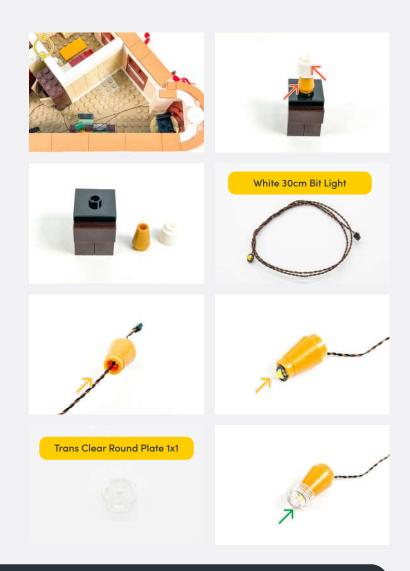


























**26** 

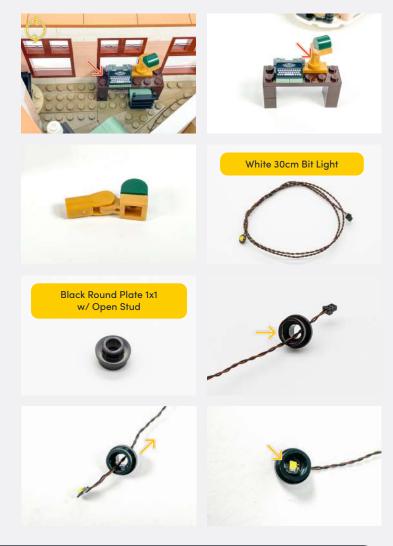


















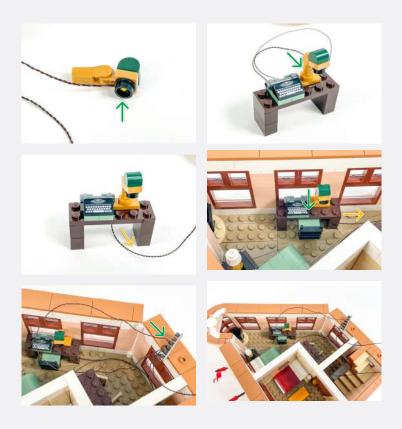


































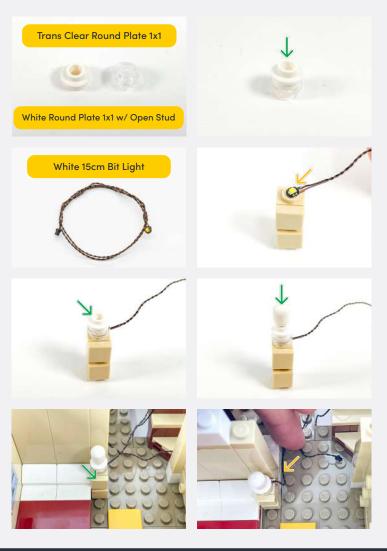





























**29** 







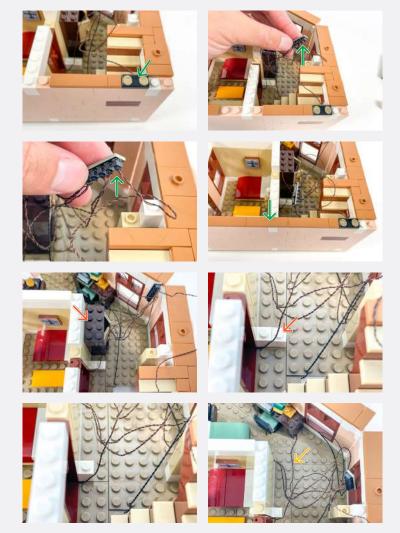










































When reconnnecting the floor, ensure the Wireless Power Connectors are alligned

If you are having trouble, please refer to page 54












Legend





















**32** 



**33** 



Legend

**Ensure** the

Wireless Power

Connector cable is facing towards the










----










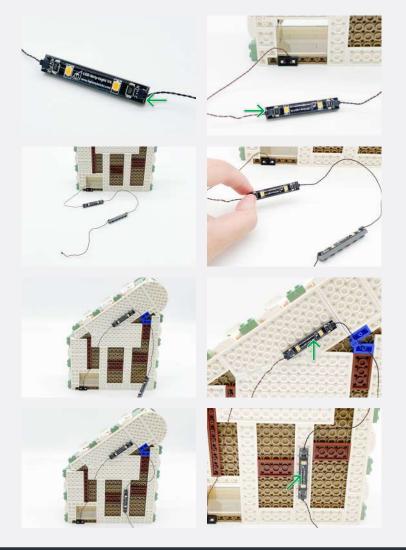

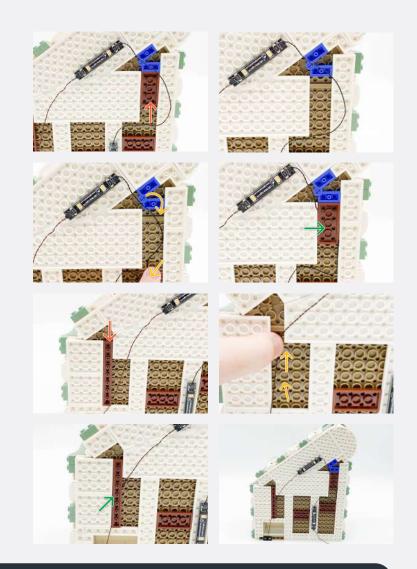
























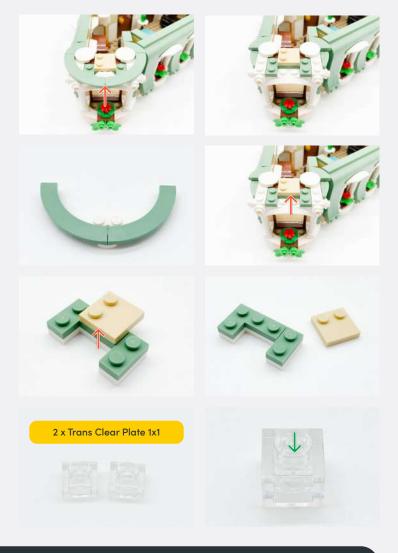





















**36** 

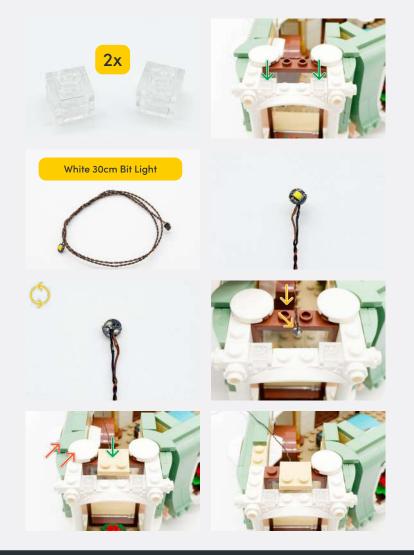















TURN / FLIP -> DIRECTIONAL 🚜 TWIST / BRAID 🔆 POWER ON TEST 🕜 NOTE ICON











Legend





















































**38** 


























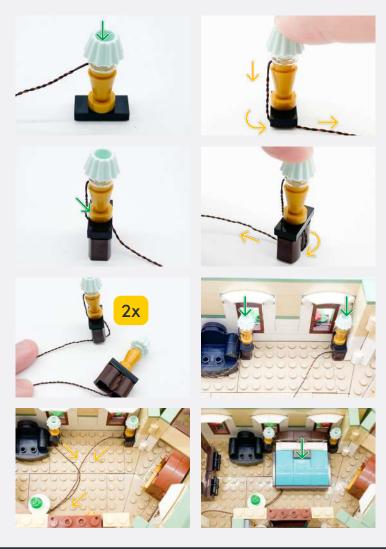




















40

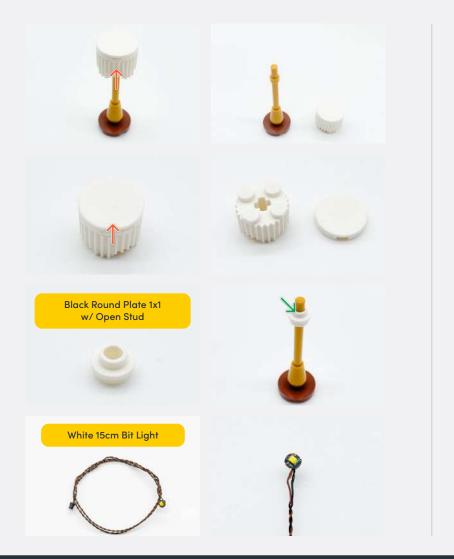






















🗹 If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section.











2x Adhesive Squares













When reconnnecting the floor, ensure the Wireless Power Connectors are alligned

If you are having trouble, please refer to page 54











Legend

→ DISCONNECT →

CONNECT / RECONNECT
















Legend
























When placing the Strip Lights, secure the cable under to minimise visibility and floppiness.

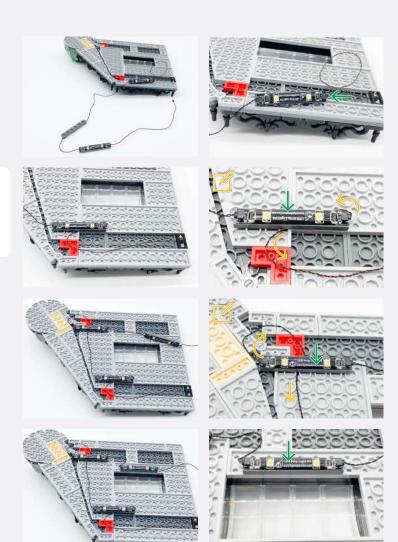

Legend

→ DISCONNECT →

CONNECT / RECONNECT














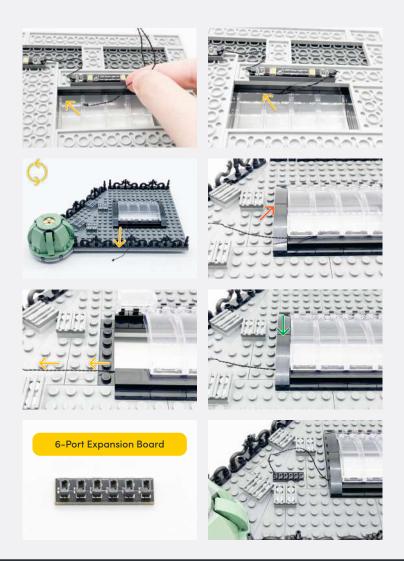























Legend

→ DISCONNECT →

CONNECT / RECONNECT









45







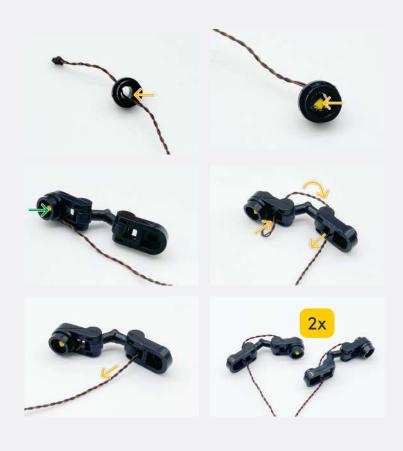

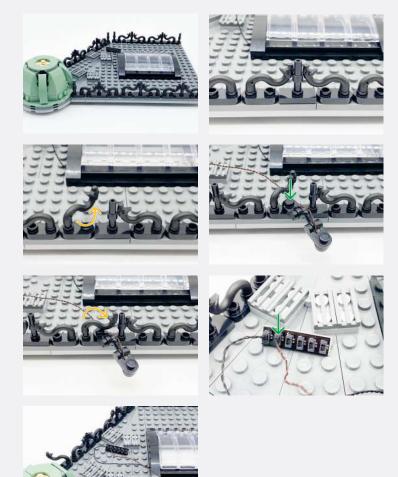




















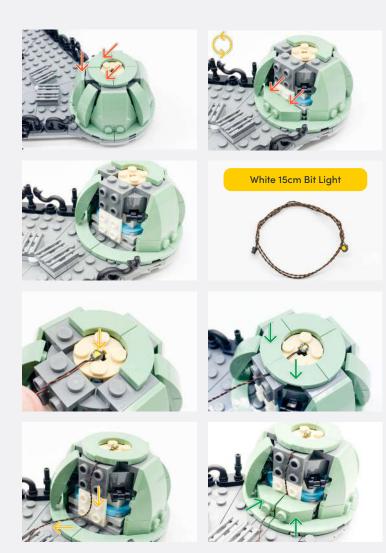



















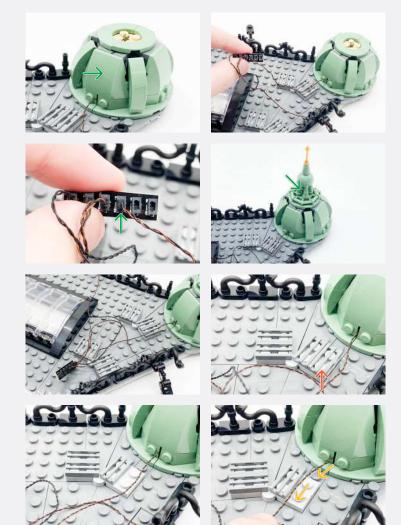

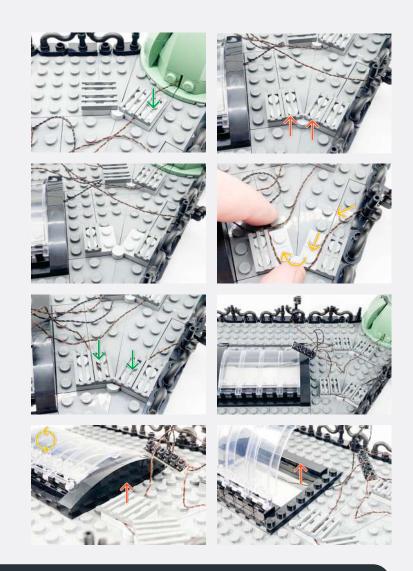




















🗹 If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section.

Secure the Bit Light from the Spire, the Spotlight from Step 47 and the Connecting Cable





When reconnnecting the roof, ensure the Wireless Power Connectors are alligned

If you are having trouble, please refer to page 54













Legend

→ DISCONNECT →

CONNECT / RECONNECT














### **FINAL PRODUCT**

This finally completes installation of the Light My Bricks Boutique Hotel 10297 Light Kit.















### **TROUBLESHOOTING**

Light My Bricks lighting
kits contain individual
components that are very
small and can be easily
damaged if not handled
correctly.

To prevent unnecessary damage to components, we highly recommend that the User Guide section, "Important things to note" is read carefully. Follow the handling procedures in the User Guide to help prevent faults and damages to your Light My Bricks components.

If you are experiencing issues with your Light My Bricks set, watch our troubleshooting video here or read on for a list of common causes to help you troubleshoot.



# **Wireless Power Connectors Install Tip**

If you're having connectivity / contact issues with the Wireless Power Connectors, try the following tip to help resolve the issue.



### Pull the terminal contacts further out.

Use a pair of tweezers to gently pull out both terminal contacts from the plate.

This will ensure that both plate and tile connectors are can easily make contact.









Firstly, ensure that the batteries have power using a battery charge gauge.

If the batteries have no power, replace the batteries.

If the batteries still have power, check to see if the batteries have been inserted correctly into the battery pack.

### **Check For CR2032 Batteries Using The Flat Battery Pack**

Inside the battery pack is a symbol indicating which side the (round) CR2032 battery should be inserted. Check that the "+" side of the battery pack has the battery with the "+" symbol facing downwards.

On the opposite side, the "-" side of the battery pack should have the battery flipped upside down, that is the "+" symbol facing upwards







## Check For Cr2032 Batteries Using The Round Battery Pack

Inside the battery pack is a symbol indicating which side the (round) CR2032 battery should be inserted. In this case, for the stacked battery pack, ensure that BOTH batteries have the "+" symbol facing upwards.





## Check for AA batteries using the AA battery pack

Inside the battery pack are symbols indicating which direction the AA battery should be inserted. The flat side of the battery should be paired with the spring side of the battery pack.

If the batteries have been installed correctly and your kit still isn't operating correctly, the next step is to check the wiring.







#### **Check Your Wires**

In order for Light My Bricks components to fit in between and underneath LEGO® bricks, the components need to be very small. Due to this nature, Light My Bricks components can be easily damaged when not handled correctly.

Be careful when removing unpacked components out of the packaging and ensure not to forcibly pull at the wires as this can damage the soldering that attach the wires to the LEDs.

If the wiring is detached from the LED itself, the light will not operate.

When connecting lights to your LEGO set, check that there are no pinched wires underneath or in between bricks and plates. When the wires are pinched and the exposed wires are touching each other, this can cause a crosswire and the lights to not function correctly.







## Check Your Expansion Board Ports/ Strip Light Ports / Effects Board Ports

It is important to note that connectors can only be inserted to the expansion board, strip light, or effects board ports in one direction.

Forcibly inserting connectors in the incorrect direction will result in damaging the pins inside each of the ports on your component board.

Not only will a light connected to the damaged port not work, but if the pins inside the port are bent to a point they are touching each other, this can result in all other lights in the system to stop working. This is a short circuit.





A short circuit can also result in overheating of the board, cable or batteries. If you suspect a short circuit, DISCONNECT POWER IMMEDIATELY Batteries can fail, catch fire, or even explode if left connected to a short circuit for too long.

If you suspect you have a faulty component due to a bent pin, try the following steps:

If you look carefully inside each of the ports, each port contains 2 small pins that should be straight. You will be able to identify a faulty port if it has any bent pins.











#### **CONTACT US**

If you have an enquiry regarding the online shop, our products or a general enquiry please refer to our Frequently Asked Questions webpage here.

Alternatively, you can contact our Customer Services team by visiting our online support portal here.

#### support.lightmybricks.com

We thank you for purchasing this product and hope you enjoy!



lightmybricks.com